

OIL ANALYSIS REPORT





ENGEL B-5 (S/N 61019930)

Hydraulic System Fluid PETRO CANADA HYDREX AW 46 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		Nov2019	0ct2020	Sep2021 Jan2023	Dec2023	
SAMPLE INFOR	RMATION	N method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0058237	PCA0058227	PCA0044032
Sample Date		Client Info		25 Dec 2023	17 Jan 2023	20 Sep 2021
Machine Age	hrs	Client Info		57811	52686	1
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Filtered	N/A	Filtered
Sample Status				NORMAL	ABNORMAL	ATTENTION
CONTAMINA	TION	method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG	NEG	NEG
WEAR META	LS	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	0	<1	<1
Chromium	ppm	ASTM D5185m	>20	<1	0	<1
Nickel	ppm	ASTM D5185m	>20	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m	>20	2	0	4
Lead	ppm	ASTM D5185m	>20	0	0	<1
Copper	ppm	ASTM D5185m	>20	<1	<1	<1
Tin	ppm	ASTM D5185m	>20	0	0	0
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	1
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	<1
Manganese	ppm	ASTM D5185m	0	0	0	0
Magnesium	ppm	ASTM D5185m	0	1	<1	<1
Calcium	ppm	ASTM D5185m	50	57	57	58
Phosphorus	ppm	ASTM D5185m	330	350	341	348
Zinc	ppm	ASTM D5185m	430	446	443	468
Sulfur	ppm	ASTM D5185m	760	953	972	926
CONTAMINA	NTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1	▲ 53	0
Sodium	ppm	ASTM D5185m		0	0	0
Potassium	ppm	ASTM D5185m	>20	<1	<1	0
FLUID CLEAN	ILINESS	S method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	1930	▲ 9744	▲ 6042
Particles >6µm		ASTM D7647	>1300	538	A 2586	1234
Particles >14µm		ASTM D7647	>160	48	157	94
Particles >21µm		ASTM D7647	>40	11	40	19
Particles >38µm		ASTM D7647	>10	1	3	4

ASTM D7647 >3

ISO 4406 (c) >19/17/14

0

18/16/13

Particles >71µm

Oil Cleanliness

1


▲ 20/19/14


0


▲ 20/17/14



OIL ANALYSIS REPORT



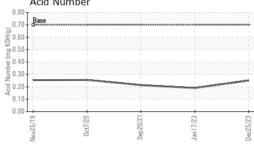

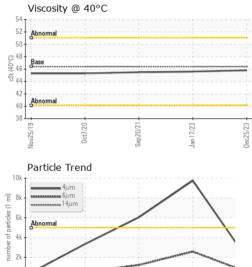

Sep20/21

n.


Vov25/19

FLUID DEGRA	DATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.70	0.25	0.19	0.214
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPE	RTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46.4	45.8	45.6	45.5
SAMPLE IMAG	ES	method	limit/base	current	history1	history2

Color

Bottom



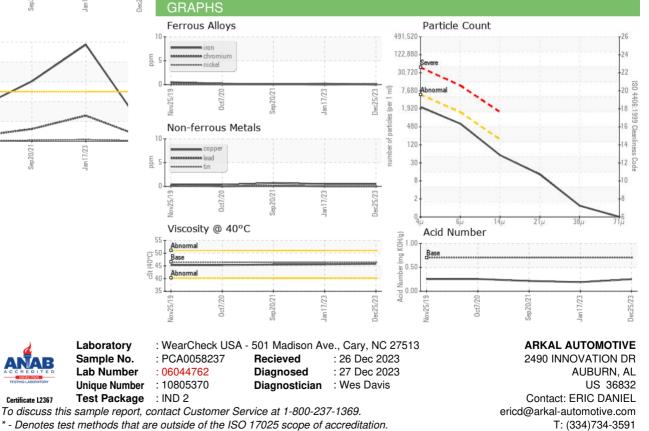

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

Jan 17/23 -

Contact/Location: ERIC DANIEL - ARKAUBAL

F: