




OIL ANALYSIS REPORT

Sample Rating Trend

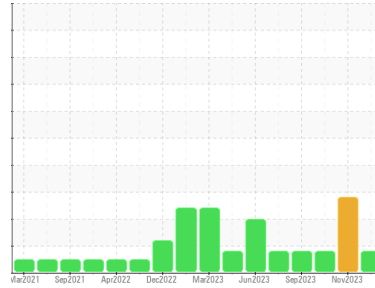

FUEL



Machine Id
827034-755

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

We advise that you check the fuel injection system. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of fuel present in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0102764	GFL0103072	GFL0090548
Sample Date	Client Info	15 Dec 2023	28 Nov 2023	29 Sep 2023
Machine Age	hrs	15714	15586	15272
Oil Age	hrs	602	474	160
Oil Changed	Client Info	Changed	Not Changd	Not Changd
Sample Status		ABNORMAL	SEVERE	ABNORMAL

CONTAMINATION

method	limit/base	current	history1	history2	
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>80	51	▲ 43	2
Chromium	ppm	ASTM D5185m	>5	2	2	<1
Nickel	ppm	ASTM D5185m	>2	<1	<1	<1
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>30	3	4	1
Lead	ppm	ASTM D5185m	>30	2	1	0
Copper	ppm	ASTM D5185m	>150	2	<1	0
Tin	ppm	ASTM D5185m	>5	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	1
Cadmium	ppm	ASTM D5185m		0	0	<1

ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m	0	4	4	0
Barium	ppm	ASTM D5185m	0	9	0	0
Molybdenum	ppm	ASTM D5185m	60	61	57	5
Manganese	ppm	ASTM D5185m	0	<1	<1	<1
Magnesium	ppm	ASTM D5185m	1010	869	868	95
Calcium	ppm	ASTM D5185m	1070	1045	965	69
Phosphorus	ppm	ASTM D5185m	1150	972	970	62
Zinc	ppm	ASTM D5185m	1270	1154	1185	78
Sulfur	ppm	ASTM D5185m	2060	2729	2624	198

CONTAMINANTS

method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>20	6	7	2
Sodium	ppm	ASTM D5185m		4	7	39
Potassium	ppm	ASTM D5185m	>20	4	3	6
Fuel	%	ASTM D3524	>5	▲ 5.6	◆ 9.5	▲ 5.0

INFRA-RED




method	limit/base	current	history1	history2		
Soot %	%	*ASTM D7844	>3	0.9	0.9	0.4
Nitration	Abs/cm	*ASTM D7624	>20	15.7	15.8	9.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	26.9	27.5	19.7

FLUID DEGRADATION

method	limit/base	current	history1	history2		
Oxidation	Abs/.1mm	*ASTM D7414	>25	29.2	29.7	17.4
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	4.6	4.4	7.4







OIL ANALYSIS REPORT

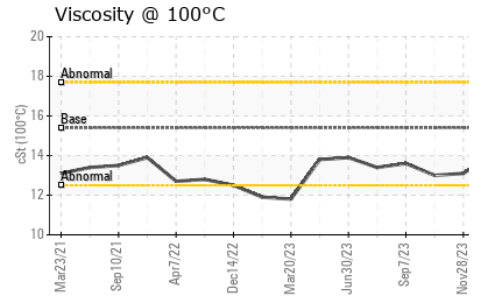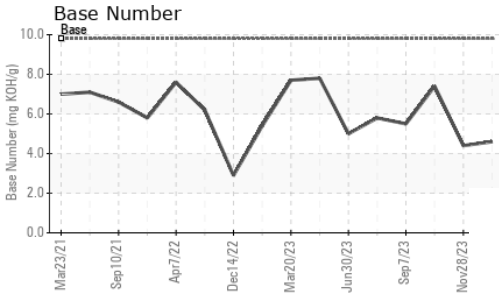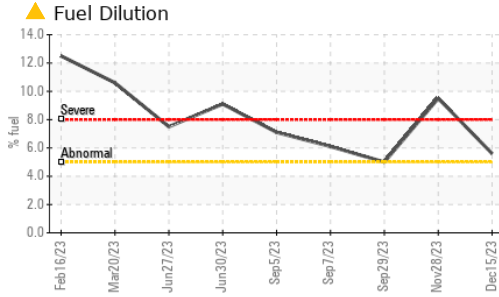

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.0	13.1

GRAPHS

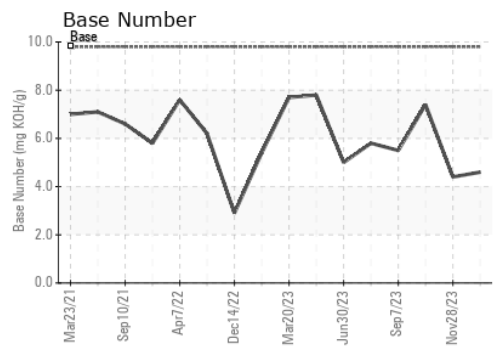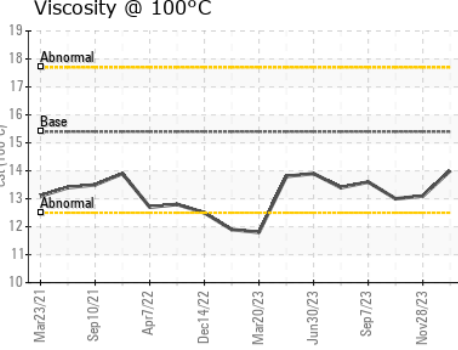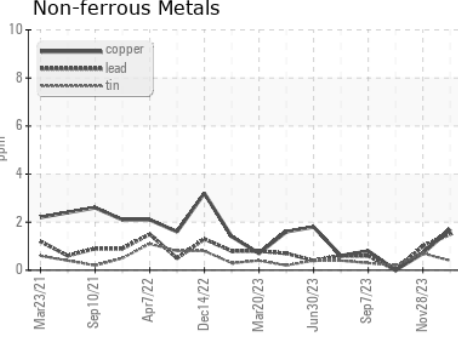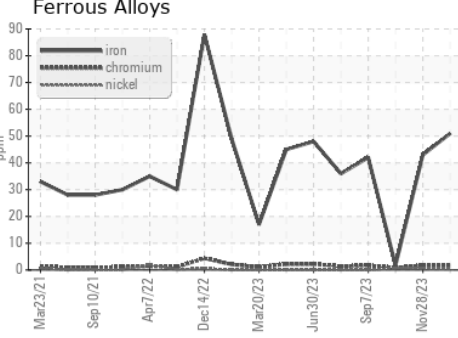

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0102764 **Received** : 26 Dec 2023
Lab Number : 06045410 **Diagnosed** : 29 Dec 2023
Unique Number : 10806018 **Diagnostician** : Angela Borella
Test Package : FLEET (Additional Tests: PercentFuel)

GFL Environmental - 622 - Traverse City Hauling
 160 Hughes Dr
 Traverse City, MI
 US 49686
 Contact: GARY BREWER

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: