




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

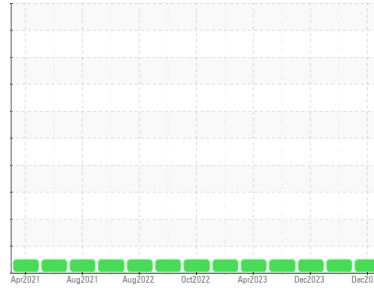

Machine Id  
**4643M**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0107084</b>	GFL0107016	GFL0096560
Sample Date	Client Info		<b>20 Dec 2023</b>	11 Dec 2023	05 Dec 2023
Machine Age	hrs	Client Info	<b>16052</b>	15972	15953
Oil Age	hrs	Client Info	<b>600</b>	600	600
Oil Changed	Client Info		<b>Not Chngd</b>	N/A	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >90	<b>9</b>	42	26
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	1	<1
Nickel	ppm	ASTM D5185m >2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	6	2
Lead	ppm	ASTM D5185m >40	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m >330	<b>&lt;1</b>	2	<1
Tin	ppm	ASTM D5185m >15	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>0</b>	<1	0
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>60</b>	61	56
Manganese	ppm	ASTM D5185m 0	<b>0</b>	0	0
Magnesium	ppm	ASTM D5185m 1010	<b>924</b>	1096	892
Calcium	ppm	ASTM D5185m 1070	<b>1072</b>	1243	1032
Phosphorus	ppm	ASTM D5185m 1150	<b>934</b>	1131	850
Zinc	ppm	ASTM D5185m 1270	<b>1223</b>	1336	1183
Sulfur	ppm	ASTM D5185m 2060	<b>2947</b>	2807	3009

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>2</b>	11	8
Sodium	ppm	ASTM D5185m	<b>2</b>	7	5
Potassium	ppm	ASTM D5185m >20	<b>2</b>	3	0

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >6	<b>0.3</b>	1.3	0.4
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.5</b>	12.7	9.2
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.5</b>	25.6	20.0

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.0</b>	22.7	17.2
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>7.6</b>	6.0	7.5







# OIL ANALYSIS REPORT

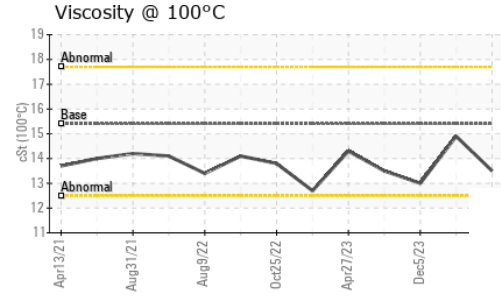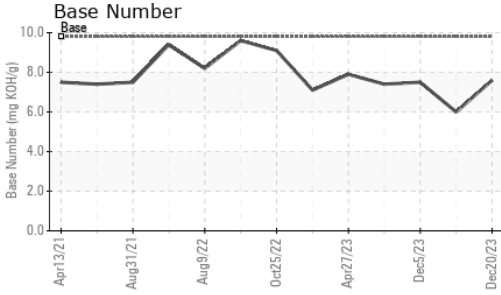

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.5</b>	14.9	13.0

## GRAPHS

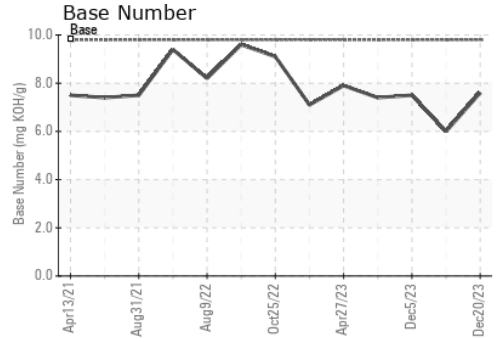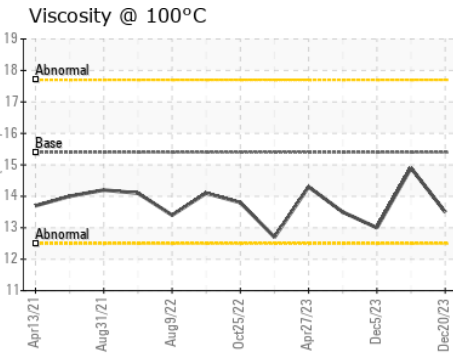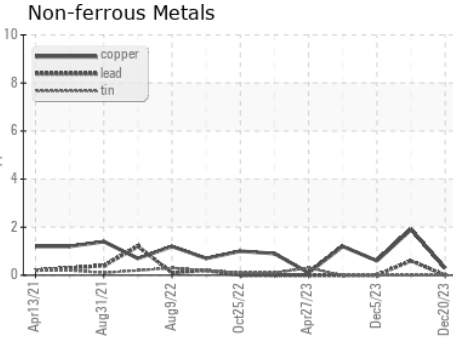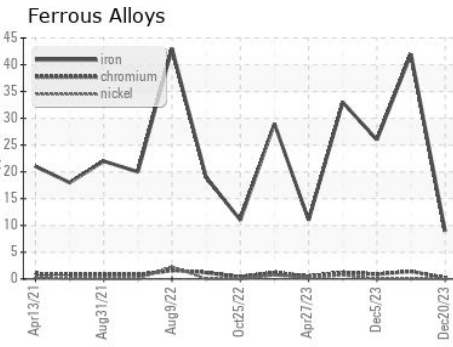

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0107084 **Received** : 27 Dec 2023  
**Lab Number** : **06045880** **Diagnosed** : 28 Dec 2023  
**Unique Number** : 10806488 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 465 - Pontiac**  
 888 Baldwin  
 Pontiac, MI  
 US 48340

Contact: Ricky Matthews  
 rickymathews@gflenv.com

T: (586)825-9514  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)