




# OIL ANALYSIS REPORT

Sample Rating Trend

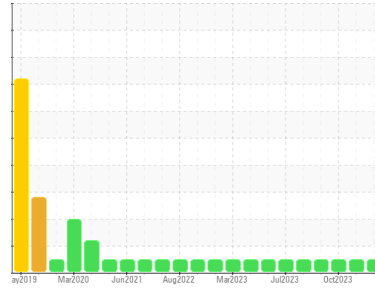

**NORMAL**



Machine Id  
**2824**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (40 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0099008</b>	GFL0098977	GFL0099051
Sample Date	Client Info		<b>15 Dec 2023</b>	14 Nov 2023	25 Oct 2023
Machine Age	hrs	Client Info	<b>8472</b>	8323	8222
Oil Age	hrs	Client Info	<b>8323</b>	8323	7797
Oil Changed	Client Info		<b>N/A</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >165	<b>9</b>	7	22
Chromium	ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >4	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m >2	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >20	<b>1</b>	2	3
Lead	ppm	ASTM D5185m >150	<b>0</b>	<1	1
Copper	ppm	ASTM D5185m >90	<b>2</b>	2	8
Tin	ppm	ASTM D5185m >5	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	<1

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>&lt;1</b>	0	<1
Barium	ppm	ASTM D5185m 0	<b>0</b>	9	4
Molybdenum	ppm	ASTM D5185m 60	<b>53</b>	60	60
Manganese	ppm	ASTM D5185m 0	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>895</b>	894	877
Calcium	ppm	ASTM D5185m 1070	<b>1069</b>	1066	1088
Phosphorus	ppm	ASTM D5185m 1150	<b>920</b>	1051	1014
Zinc	ppm	ASTM D5185m 1270	<b>1171</b>	1187	1203
Sulfur	ppm	ASTM D5185m 2060	<b>2705</b>	3384	3247

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >35	<b>3</b>	4	5
Sodium	ppm	ASTM D5185m	<b>3</b>	1	1
Potassium	ppm	ASTM D5185m >20	<b>2</b>	4	9

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >7.5	<b>0.2</b>	0.1	0.4
Nitration	Abs/cm	*ASTM D7624 >20	<b>6.9</b>	5.9	9.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.8</b>	18.5	21.3

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>14.9</b>	14.2	17.2
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>7.7</b>	8.6	6.8







# OIL ANALYSIS REPORT

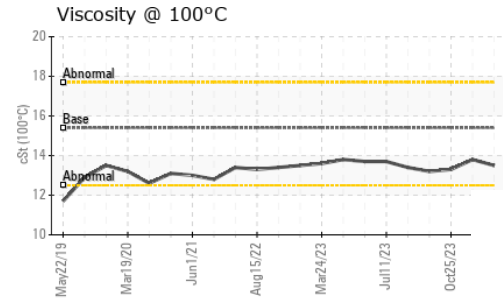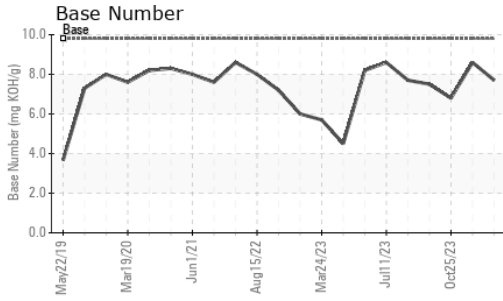

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.5</b>	13.8	13.3

## GRAPHS

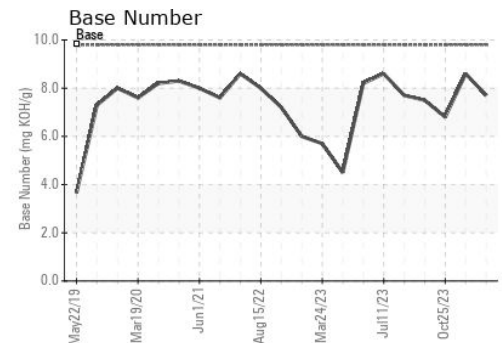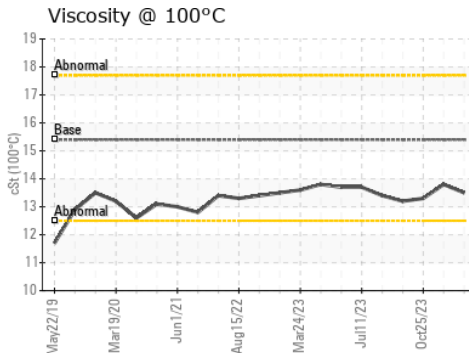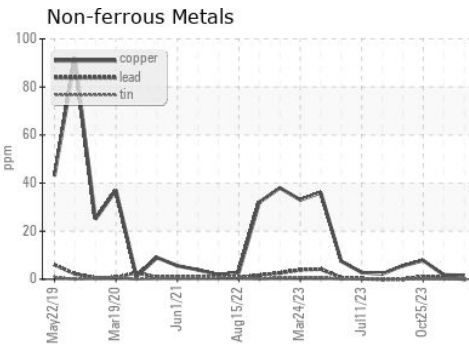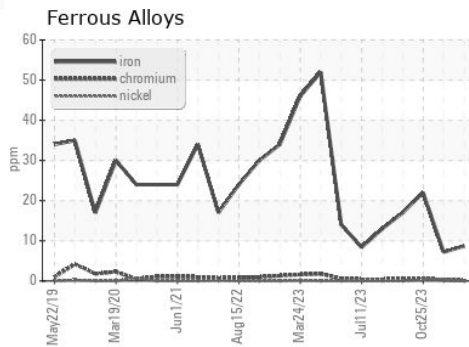

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0099008 **Received** : 27 Dec 2023  
**Lab Number** : **06046051** **Diagnosed** : 28 Dec 2023  
**Unique Number** : 10806659 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 084 - Clarksville**  
 699 Jack Miller Boulevard  
 Clarksville, TN  
 US 37042  
**Contact: ROBERT THIBAUT**  
 robert.thibault@gflenv.com  
 T: (931)552-7276  
 F: (931)572-9674

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)