




OIL ANALYSIS REPORT

Sample Rating Trend

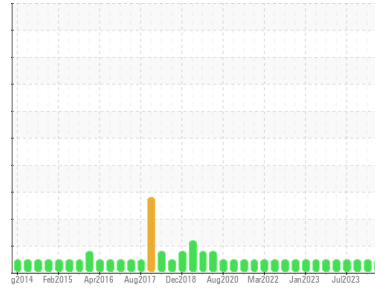

NORMAL



Machine Id
11102

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (30 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	GFL0098949	GFL0099048	GFL0088404	
Sample Date	Client Info	04 Dec 2023	20 Oct 2023	15 Aug 2023	
Machine Age	hrs	Client Info	12051	62002	61836
Oil Age	hrs	Client Info	62002	61836	61836
Oil Changed	Client Info	N/A	Changed	N/A	
Sample Status		NORMAL	NORMAL	NORMAL	

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >130	6	11	24
Chromium	ppm ASTM D5185m >10	0	<1	<1
Nickel	ppm ASTM D5185m >4	0	<1	<1
Titanium	ppm ASTM D5185m >2	0	<1	<1
Silver	ppm ASTM D5185m >2	0	0	<1
Aluminum	ppm ASTM D5185m >20	<1	2	2
Lead	ppm ASTM D5185m >20	0	0	0
Copper	ppm ASTM D5185m >125	<1	<1	<1
Tin	ppm ASTM D5185m >4	0	0	<1
Vanadium	ppm ASTM D5185m	0	0	<1
Cadmium	ppm ASTM D5185m	0	<1	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<1	<1	0
Barium	ppm ASTM D5185m 0	0	3	0
Molybdenum	ppm ASTM D5185m 60	51	60	56
Manganese	ppm ASTM D5185m 0	0	0	<1
Magnesium	ppm ASTM D5185m 1010	883	894	934
Calcium	ppm ASTM D5185m 1070	1044	1069	1046
Phosphorus	ppm ASTM D5185m 1150	917	992	965
Zinc	ppm ASTM D5185m 1270	1152	1222	1209
Sulfur	ppm ASTM D5185m 2060	2749	3426	3315

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	2	2	3
Sodium	ppm ASTM D5185m	1	0	2
Potassium	ppm ASTM D5185m >20	0	3	3

INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >6	0.2	0.3	0.8
Nitration	Abs/cm *ASTM D7624 >20	5.7	6.0	9.2
Sulfation	Abs/.1mm *ASTM D7415 >30	17.6	18.2	19.3

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	13.7	14.0	16.0
Base Number (BN)	mg KOH/g ASTM D2896 9.8	8.7	8.8	7.9







OIL ANALYSIS REPORT

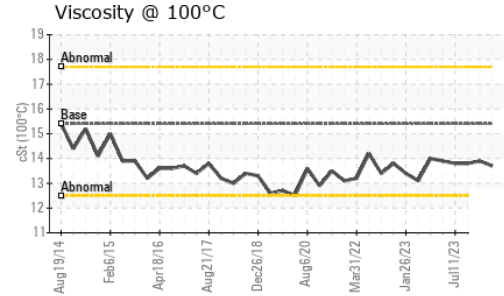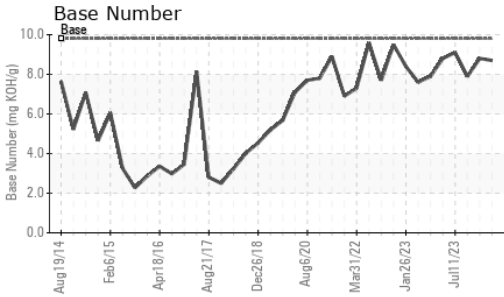

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.7	13.9

GRAPHS

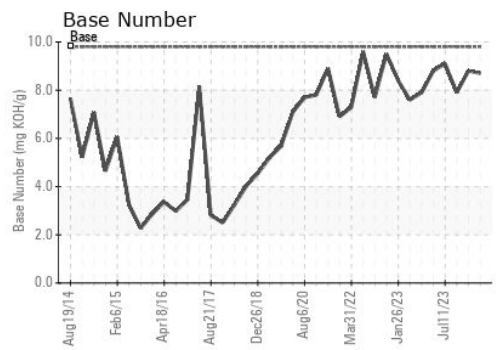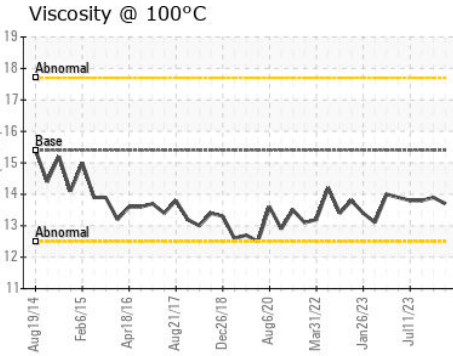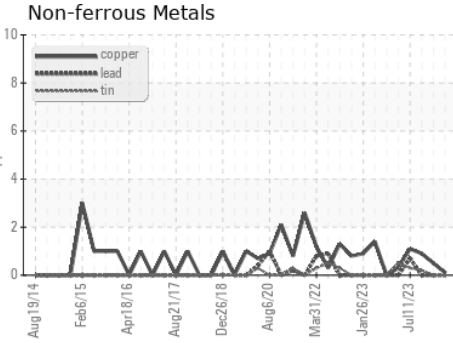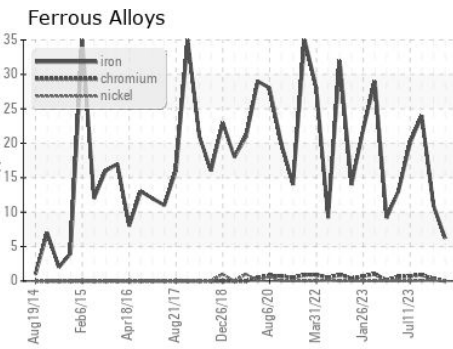

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0098949 **Received** : 27 Dec 2023
Lab Number : **06046072** **Diagnosed** : 28 Dec 2023
Unique Number : 10806680 **Diagnostician** : Wes Davis
Test Package : FLEET

GFL Environmental - 084 - Clarksville
 699 Jack Miller Boulevard
 Clarksville, TN
 US 37042
 Contact: ROBERT THIBAUT
 robert.thibault@gflenv.com
 T: (931)552-7276
 F: (931)572-9674

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)