




# OIL ANALYSIS REPORT

Sample Rating Trend

WEAR



Machine Id  
**545005**  
 Component  
**Natural Gas Engine**  
 Fluid  
**PETRO CANADA DURON GEO LD 15W40 (--- GAL)**

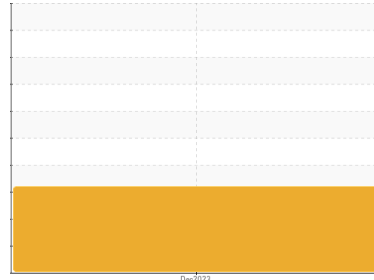

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

The copper level is abnormal. Piston, ring and cylinder wear is indicated.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0102747</b>	---	---
Sample Date	Client Info	<b>20 Dec 2023</b>	---	---
Machine Age	hrs Client Info	<b>41679</b>	---	---
Oil Age	hrs Client Info	<b>41679</b>	---	---
Oil Changed	Client Info	<b>Not Chngd</b>	---	---
Sample Status		<b>ABNORMAL</b>	---	---

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.1	<b>NEG</b>	---	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron ppm	ASTM D5185m >50	<b>▲ 62</b>	---	---
Chromium ppm	ASTM D5185m >4	<b>▲ 8</b>	---	---
Nickel ppm	ASTM D5185m >2	<b>2</b>	---	---
Titanium ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Silver ppm	ASTM D5185m >3	<b>0</b>	---	---
Aluminum ppm	ASTM D5185m >9	<b>▲ 16</b>	---	---
Lead ppm	ASTM D5185m >30	<b>11</b>	---	---
Copper ppm	ASTM D5185m >35	<b>▲ 39</b>	---	---
Tin ppm	ASTM D5185m >4	<b>&lt;1</b>	---	---
Vanadium ppm	ASTM D5185m	<b>0</b>	---	---
Cadmium ppm	ASTM D5185m	<b>0</b>	---	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron ppm	ASTM D5185m 50	<b>8</b>	---	---
Barium ppm	ASTM D5185m 5	<b>0</b>	---	---
Molybdenum ppm	ASTM D5185m 50	<b>64</b>	---	---
Manganese ppm	ASTM D5185m 0	<b>&lt;1</b>	---	---
Magnesium ppm	ASTM D5185m 560	<b>588</b>	---	---
Calcium ppm	ASTM D5185m 1510	<b>1599</b>	---	---
Phosphorus ppm	ASTM D5185m 780	<b>711</b>	---	---
Zinc ppm	ASTM D5185m 870	<b>921</b>	---	---
Sulfur ppm	ASTM D5185m 2040	<b>2229</b>	---	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm	ASTM D5185m >+100	<b>8</b>	---	---
Sodium ppm	ASTM D5185m	<b>19</b>	---	---
Potassium ppm	ASTM D5185m >20	<b>36</b>	---	---

## INFRA-RED






method	limit/base	current	history1	history2
Soot %	% *ASTM D7844	<b>0</b>	---	---
Nitration	Abs/cm *ASTM D7624 >20	<b>12.9</b>	---	---
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>25.5</b>	---	---

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>24.1</b>	---	---
Base Number (BN)	mg KOH/g ASTM D2896 10.2	<b>3.1</b>	---	---







# OIL ANALYSIS REPORT

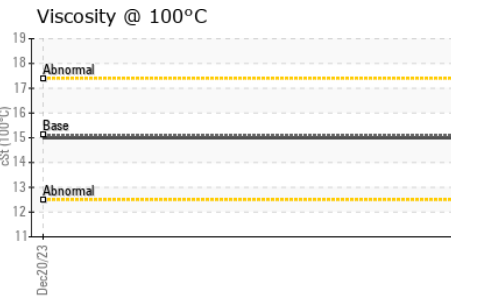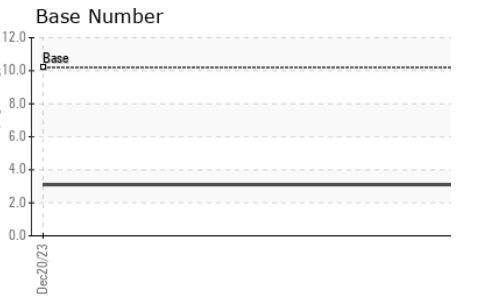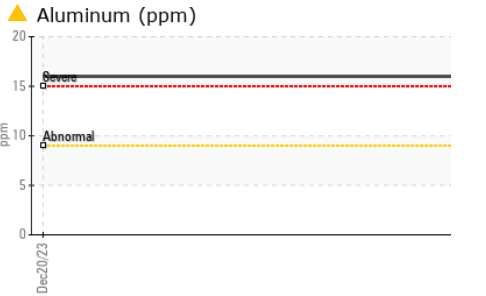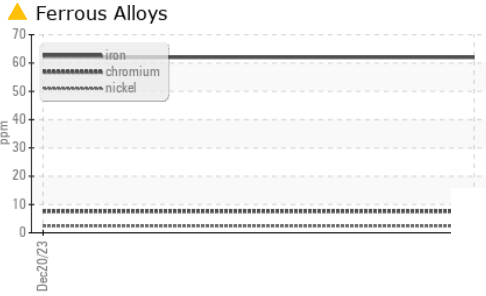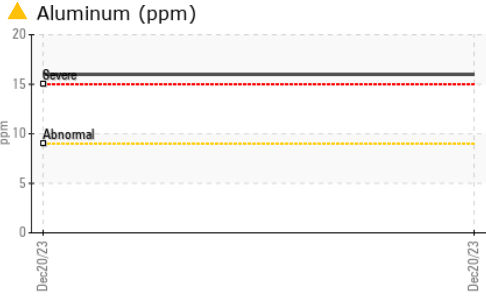

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.1	15.0	---

## GRAPHS

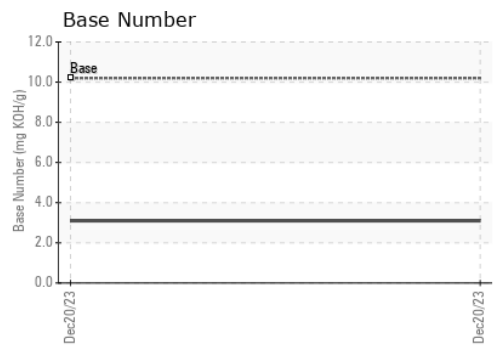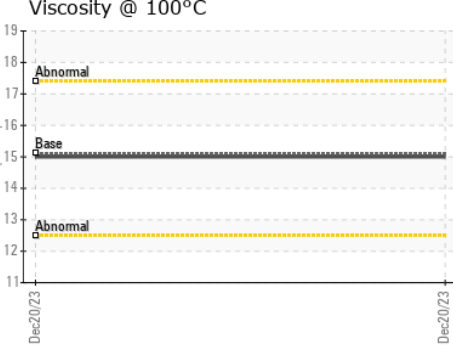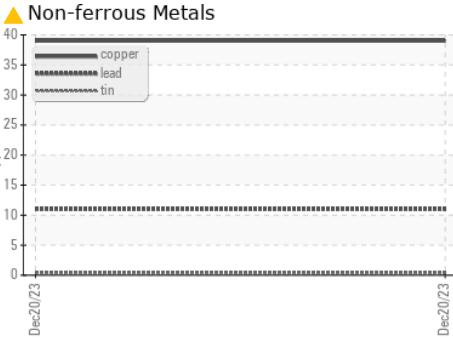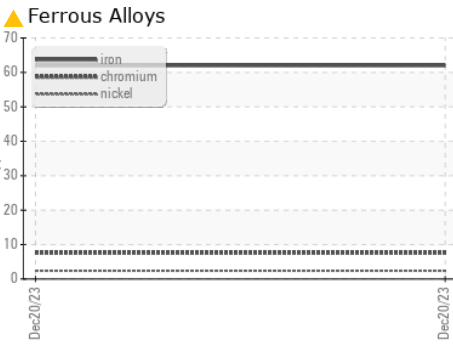

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0102747 **Received** : 27 Dec 2023  
**Lab Number** : 06046565 **Diagnosed** : 29 Dec 2023  
**Unique Number** : 10807173 **Diagnostician** : Jonathan Hester  
**Test Package** : FLEET

**GFL Environmental - 963 - Peoria HC Disposal**  
 1113 N. Swords Ave.  
 West Peoria, IL  
 US 61604  
 Contact: Corey Dozard  
 cdozard@gflenv.com

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)