




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

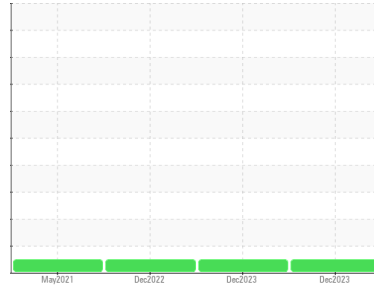

Machine Id  
**4566M**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0105680</b>	GFL0105785	GFL0064056
Sample Date	Client Info		<b>26 Dec 2023</b>	22 Dec 2023	15 Dec 2022
Machine Age	hrs	Client Info	<b>19342</b>	19213	17455
Oil Age	hrs	Client Info	<b>17455</b>	17455	14902
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >90	<b>6</b>	1	53
Chromium	ppm	ASTM D5185m >20	<b>0</b>	<1	2
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	1
Aluminum	ppm	ASTM D5185m >20	<b>6</b>	2	6
Lead	ppm	ASTM D5185m >40	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m >330	<b>&lt;1</b>	0	5
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	0	<1
Antimony	ppm	ASTM D5185m	<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>1</b>	2	2
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185m 60	<b>57</b>	57	63
Manganese	ppm	ASTM D5185m 0	<b>0</b>	0	1
Magnesium	ppm	ASTM D5185m 1010	<b>979</b>	887	902
Calcium	ppm	ASTM D5185m 1070	<b>1094</b>	989	1200
Phosphorus	ppm	ASTM D5185m 1150	<b>1042</b>	956	1060
Zinc	ppm	ASTM D5185m 1270	<b>1233</b>	1149	1264
Sulfur	ppm	ASTM D5185m 2060	<b>3132</b>	3265	3659

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>3</b>	5	12
Sodium	ppm	ASTM D5185m	<b>&lt;1</b>	22	1
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	2	2

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >6	<b>0.2</b>	0.1	0.4
Nitration	Abs/cm	*ASTM D7624 >20	<b>5.2</b>	4.3	9.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.1</b>	17.5	23.9

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.8</b>	12.8	19.5
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.6</b>	9.4	9.9







# OIL ANALYSIS REPORT

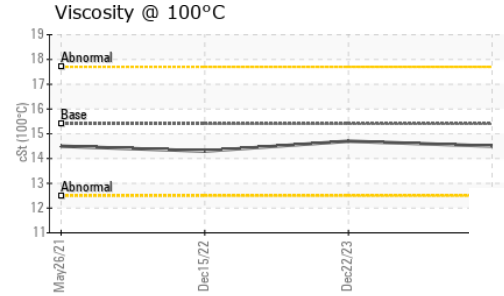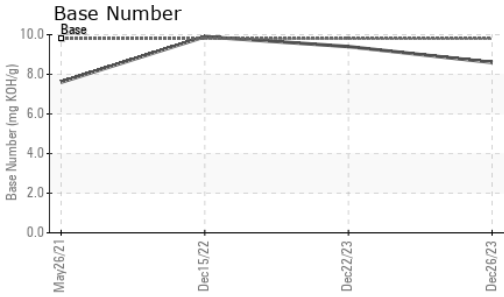

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.5</b>	14.7	14.3

## GRAPHS

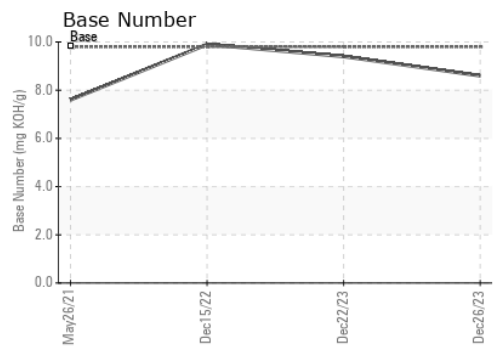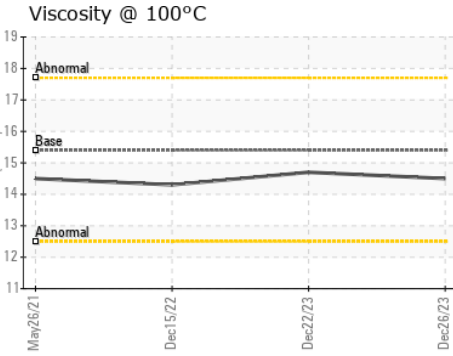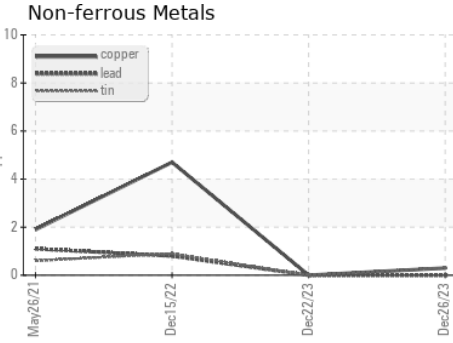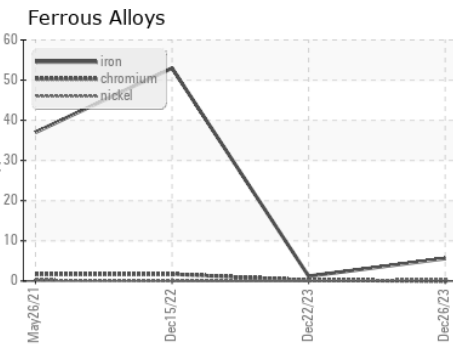

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0105680 **Recieved** : 28 Dec 2023  
**Lab Number** : **06046707** **Diagnosed** : 28 Dec 2023  
**Unique Number** : 10807315 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 415 - Michigan East**  
 6200 Elmridge  
 Sterling Heights, MI  
 US 48313  
 Contact: Frank Wolak  
 fwolak@gflenv.com  
 T: (586)825-9514  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)