




# OIL ANALYSIS REPORT

Sample Rating Trend

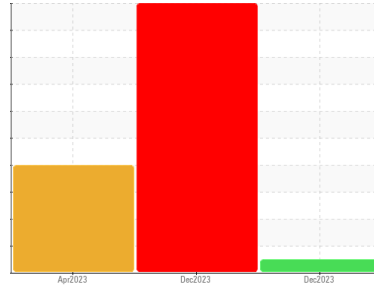

**NORMAL**



Machine Id  
**134M**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0105682</b>	GFL0105841	GFL0069863
Sample Date	Client Info		<b>26 Dec 2023</b>	22 Dec 2023	26 Apr 2023
Machine Age	hrs	Client Info	<b>23817</b>	23081	23071
Oil Age	hrs	Client Info	<b>23081</b>	0	600
Oil Changed	Client Info		<b>Changed</b>	Not Changd	Changed
Sample Status			<b>NORMAL</b>	SEVERE	SEVERE

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	0.10	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>5</b>	53	92
Chromium	ppm	ASTM D5185m >20	<b>0</b>	4	<1
Nickel	ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	3
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>5</b>	5	5
Lead	ppm	ASTM D5185m >40	<b>0</b>	2	0
Copper	ppm	ASTM D5185m >330	<b>&lt;1</b>	2	8
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>&lt;1</b>	21	16
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	1
Molybdenum	ppm	ASTM D5185m 60	<b>57</b>	115	16
Manganese	ppm	ASTM D5185m 0	<b>0</b>	0	1
Magnesium	ppm	ASTM D5185m 1010	<b>967</b>	812	212
Calcium	ppm	ASTM D5185m 1070	<b>1092</b>	985	338
Phosphorus	ppm	ASTM D5185m 1150	<b>1036</b>	808	498
Zinc	ppm	ASTM D5185m 1270	<b>1219</b>	1068	418
Sulfur	ppm	ASTM D5185m 2060	<b>3105</b>	3132	5946

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>3</b>	30	28
Sodium	ppm	ASTM D5185m	<b>0</b>	1682	33
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	17	31
Fuel	%	ASTM D3524 >3.0	<b>0.1</b>	6.7	13.1

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.2</b>	2.6	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>5.2</b>	17.3	5.5
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.1</b>	26.8	24.3

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.9</b>	24.2	21.4
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.5</b>	12.7	7.1







# OIL ANALYSIS REPORT

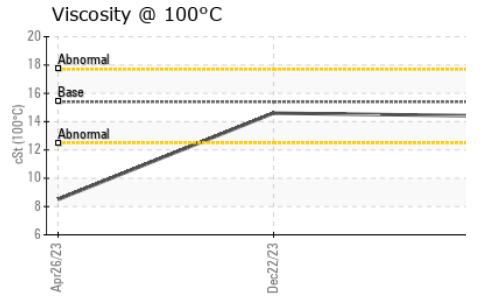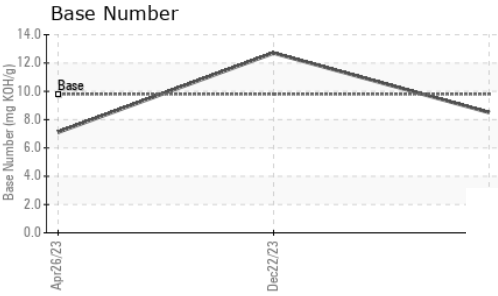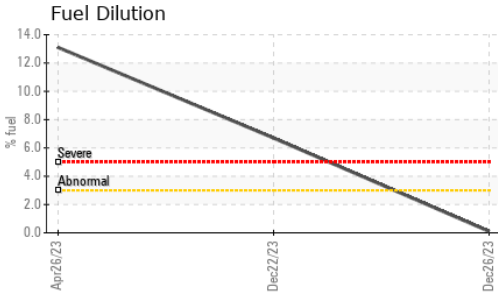

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.4</b>	14.6 ▲ 8.5

## GRAPHS

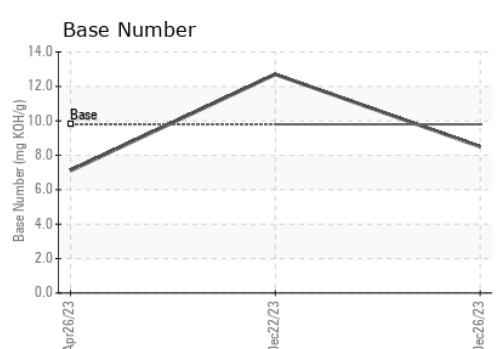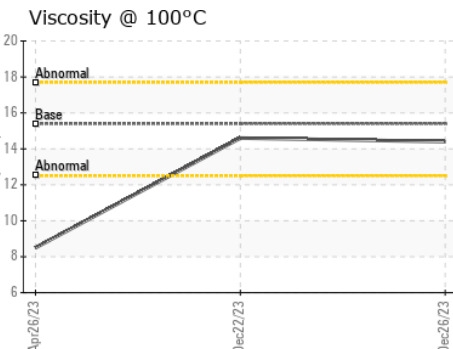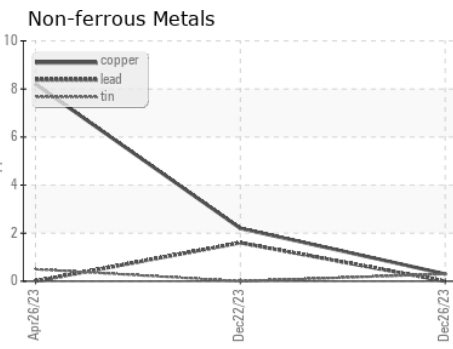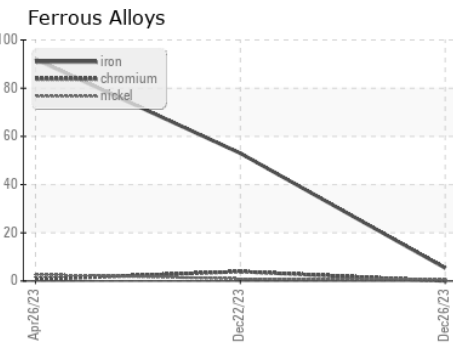

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0105682 **Received** : 28 Dec 2023  
**Lab Number** : 06046709 **Diagnosed** : 29 Dec 2023  
**Unique Number** : 10807317 **Diagnostician** : Wes Davis  
**Test Package** : FLEET ( Additional Tests: PercentFuel )

**GFL Environmental - 415 - Michigan East**  
 6200 Elmridge  
 Sterling Heights, MI  
 US 48313  
 Contact: Frank Wolak  
 fwolak@gflenv.com  
 T: (586)825-9514  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)