


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

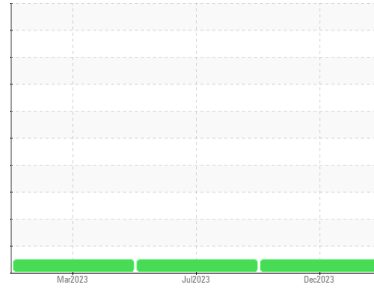

Area  
**(89606X) Walgreens - Tractor**  
Machine Id  
**[Walgreens - Tractor] 136A67222**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0093957</b>	PCA0093989	PCA0093886
Sample Date	Client Info		<b>19 Dec 2023</b>	05 Jul 2023	21 Mar 2023
Machine Age	mls	Client Info	<b>588290</b>	576010	567779
Oil Age	mls	Client Info	<b>588290</b>	0	0
Oil Changed	Client Info		<b>Not Changed</b>	Not Changed	Not Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >110	<b>2</b>	5	4
Chromium	ppm	ASTM D5185m >4	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	1
Titanium	ppm	ASTM D5185m	<b>1</b>	<1	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>2</b>	3	2
Lead	ppm	ASTM D5185m >45	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >85	<b>5</b>	9	11
Tin	ppm	ASTM D5185m >4	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>4</b>	5	4
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 50	<b>61</b>	60	62
Manganese	ppm	ASTM D5185m 0	<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185m 950	<b>935</b>	873	1035
Calcium	ppm	ASTM D5185m 1050	<b>1110</b>	1056	1161
Phosphorus	ppm	ASTM D5185m 995	<b>988</b>	985	1064
Zinc	ppm	ASTM D5185m 1180	<b>1158</b>	1141	1344
Sulfur	ppm	ASTM D5185m 2600	<b>3023</b>	3296	3559

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	<b>3</b>	4	5
Sodium	ppm	ASTM D5185m	<b>0</b>	0	1
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	4	2



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.1</b>	0.2	0.2
Nitration	Abs/cm	*ASTM D7624 >20	<b>5.7</b>	6.1	6.2
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>17.6</b>	18.6	16.5

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.7</b>	15.4	13.6
Base Number (BN)	mg KOH/g	ASTM D2896	<b>8.7</b>	8.4	7.9





# OIL ANALYSIS REPORT

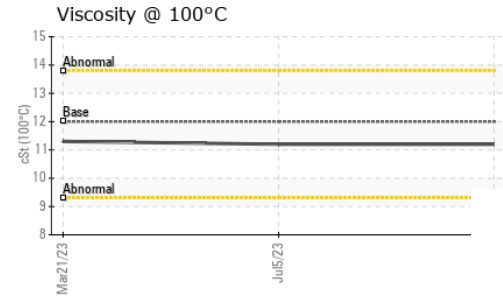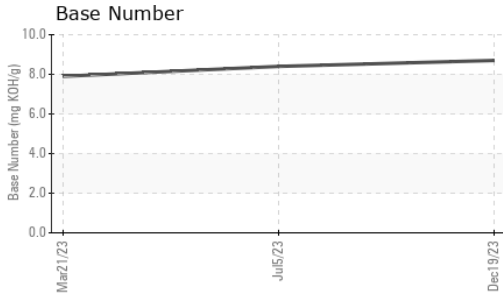

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	11.2	11.3

## GRAPHS

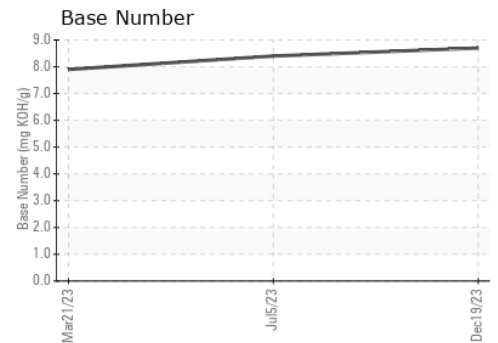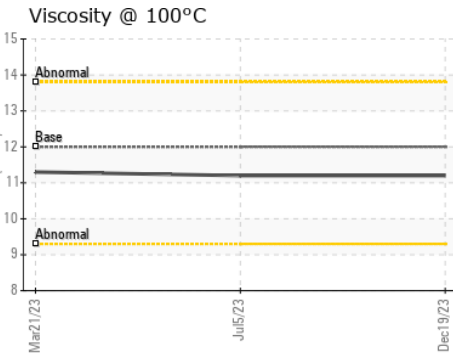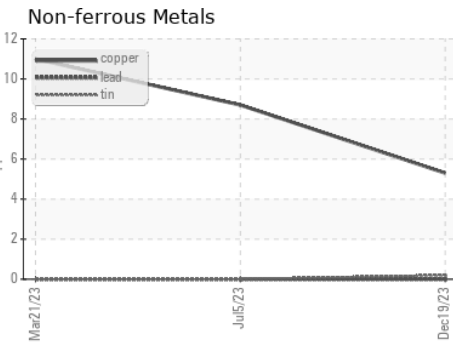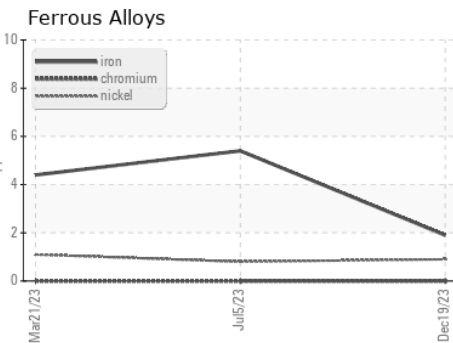

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0093957 **Received** : 28 Dec 2023  
**Lab Number** : **06046738** **Diagnosed** : 28 Dec 2023  
**Unique Number** : 10807346 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**Transervice - Shop 1372 - Berkeley-Moreno Valley**  
 17500 Perris Blvd.  
 Moreno Valley, CA  
 US 92551  
 Contact: Ryan Cruz  
 rcruz@transervice.com  
 T: (951)924-7131  
 F: (951)924-7151

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)