


# OIL ANALYSIS REPORT



Area  
**RES COAL [RES COAL]**  
 Machine Id  
**CATERPILLAR D11R 2097 (S/N 7PZ01511)**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- QTS)**

### Sample Rating Trend

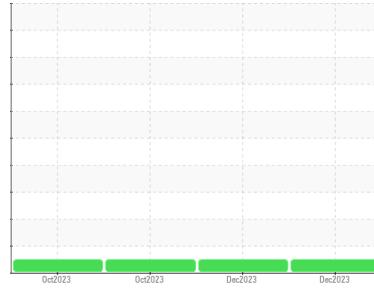

NORMAL

✓

## DIAGNOSIS

- Recommendation**  
 Resample at the next service interval to monitor.
- Wear**  
 All component wear rates are normal.
- Contamination**  
 There is no indication of any contamination in the oil.
- Fluid Condition**  
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0099885</b>	PCA0099884	PCA0099881
Sample Date	Client Info		<b>19 Dec 2023</b>	07 Dec 2023	19 Oct 2023
Machine Age	hrs	Client Info	<b>34087</b>	34031	33754
Oil Age	hrs	Client Info	<b>333</b>	277	250
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>40</b>	28	18
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >2	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>2</b>	1	2
Lead	ppm	ASTM D5185m >40	<b>3</b>	2	3
Copper	ppm	ASTM D5185m >330	<b>92</b>	28	25
Tin	ppm	ASTM D5185m >15	<b>4</b>	3	3
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	<1

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>2</b>	<1	3
Barium	ppm	ASTM D5185m 0	<b>0</b>	11	3
Molybdenum	ppm	ASTM D5185m 60	<b>64</b>	61	62
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>1114</b>	943	915
Calcium	ppm	ASTM D5185m 1070	<b>1229</b>	1073	1195
Phosphorus	ppm	ASTM D5185m 1150	<b>1201</b>	987	1095
Zinc	ppm	ASTM D5185m 1270	<b>1386</b>	1243	1256
Sulfur	ppm	ASTM D5185m 2060	<b>3384</b>	3234	3769

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	4	5
Sodium	ppm	ASTM D5185m	<b>4</b>	2	4
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	3	3



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.6</b>	0.5	0.4
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.8</b>	8.8	7.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.0</b>	20.4	19.9

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>18.5</b>	17.2	15.7
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>7.1</b>	8.0	9.0





# OIL ANALYSIS REPORT

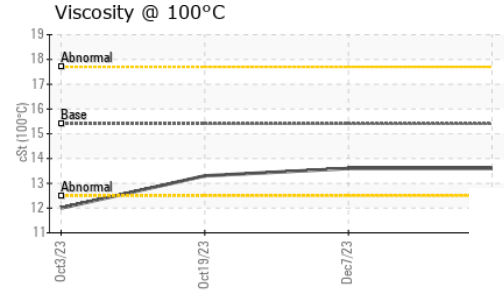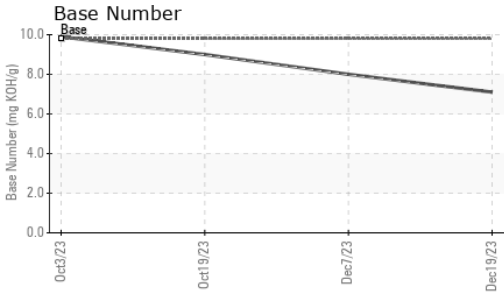

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.6</b>	13.6

### GRAPHS

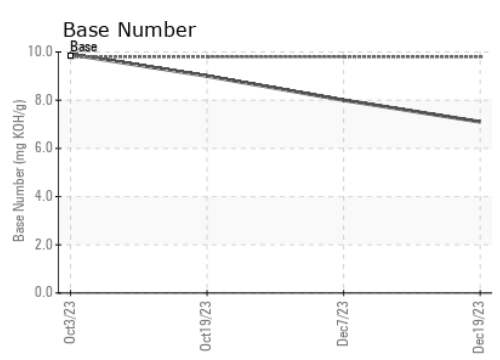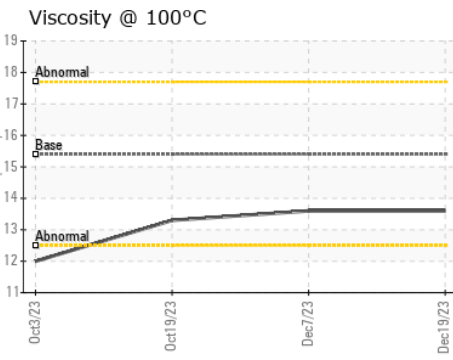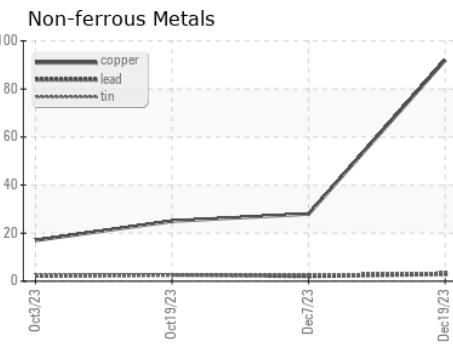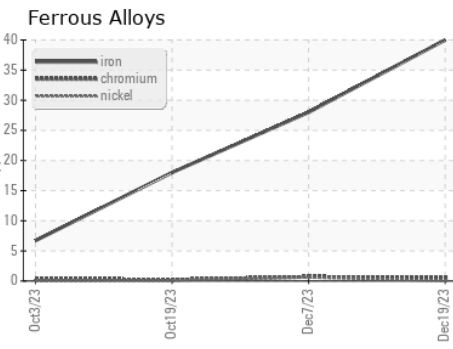

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0099885 **Received** : 29 Dec 2023  
**Lab Number** : **06047593** **Diagnosed** : 02 Jan 2024  
**Unique Number** : 10808201 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**AMERICAN NATURAL SUPPLY**  
 12475 RTE 119 HWY N  
 ROCHESTER MILLS, PA  
 US 15771  
 Contact: SCOTT KINTER  
 skinter@americannatural.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)