

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id 613439

Component Diesel Engine

Fluid PETRO CANADA DURON SHP 10W30 (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

QTS)			Feb 2023	Nov2023		
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0097368	PCA0083846	
Sample Date		Client Info		28 Nov 2023	18 Feb 2023	
Machine Age	mls	Client Info		240280	165306	
Oil Age	mls	Client Info		74974	77202	
Oil Changed		Client Info		Changed	Changed	
Sample Status				NORMAL	NORMAL	
CONTAMINAT	ION	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0	<1.0	
Water		WC Method	>0.2	NEG	NEG	
Glycol		WC Method		NEG	NEG	
WEAR METAL	.S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	52	31	
Chromium	ppm	ASTM D5185m	>20	3	3	
Nickel	ppm	ASTM D5185m	>4	<1	0	
Titanium	ppm	ASTM D5185m		15	4	
Silver	ppm	ASTM D5185m	>3	<1	0	
Aluminum	ppm	ASTM D5185m	>20	13	10	
Lead	ppm	ASTM D5185m	>40	<1	0	
Copper	ppm	ASTM D5185m	>330	39	42	
Tin	ppm	ASTM D5185m	>15	2	1	
Vanadium	ppm	ASTM D5185m		0	<1	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	3	<1	
Barium	ppm	ASTM D5185m	0	0	0	
Molybdenum	ppm	ASTM D5185m	50	56	25	
Manganese	ppm	ASTM D5185m	0	1	2	
Magnesium	ppm	ASTM D5185m	950	996	431	
Calcium	ppm	ASTM D5185m	1050	1364	594	
Phosphorus	ppm	ASTM D5185m	995	1097	433	
Zinc	ppm	ASTM D5185m	1180	1332	574	
Sulfur	ppm	ASTM D5185m	2600	2838	957	
CONTAMINAN	ITS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	8	5	
Sodium	ppm	ASTM D5185m		6	4	
Potassium	ppm	ASTM D5185m	>20	16	19	
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	2.5	2.3	
Nitration	Abs/cm	*ASTM D7624	>20	12.9	15.1	
Sulfation	Abs/.1mm	*ASTM D7415	>30	27.7	29.8	
FLUID DEGRAI	DATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	21.5	23.9	
Base Number (BN)	mg KOH/g	ASTM D2896		4.6	4.6	



Abnorm

Feb1

OIL ANALYSIS REPORT

scalar

scalar

scalar

*Visual

*Visual

*Visual

scalar *Visual

NONE


VISUAL


White Metal


Yellow Metal

Precipitate

Silt





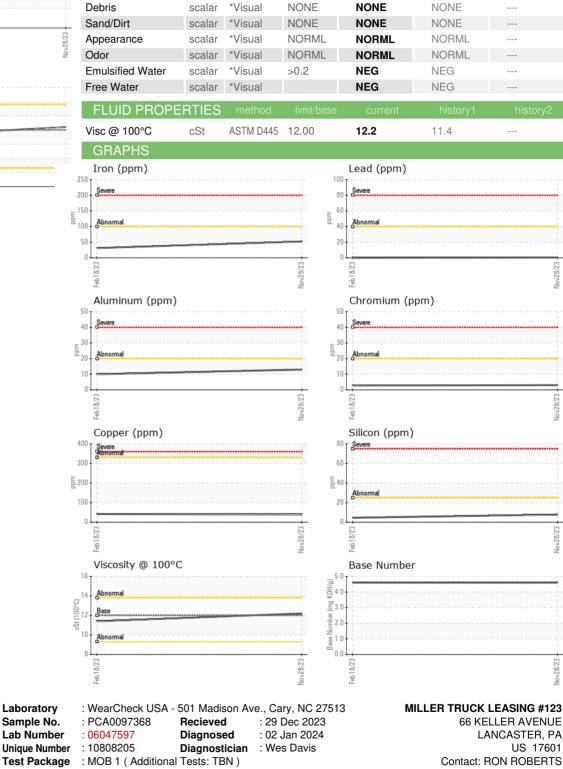



Test Package : MOB 1 (Additional Tests: TBN) Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369. rroberts@millertransgroup.com * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: RON ROBERTS - MILLAN

T: (717)945-6205

F: (717)945-5818