


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

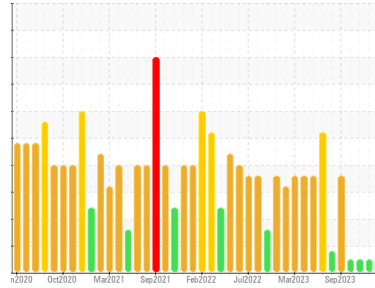

Area
GRIND ROOM [98666259]
 Machine Id
KR-GR-003071 - DUMPER 3A (S/N GRIND A - 11513012)
 Component
Hydraulic System
 Fluid
AW HYDRAULIC OIL ISO 68 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. (Customer Sample Comment: 98666259)

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

| method | limit/base | current | history1 | history2 |
|---------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | PCA0113103 | PCA0110822 | PCA0108230 |
| Sample Date | Client Info | 20 Dec 2023 | 29 Nov 2023 | 30 Oct 2023 |
| Machine Age | hrs | 0 | 0 | 0 |
| Oil Age | hrs | 0 | 0 | 0 |
| Oil Changed | Client Info | Not Changed | N/A | N/A |
| Sample Status | | NORMAL | NORMAL | NORMAL |

CONTAMINATION

| method | limit/base | current | history1 | history2 |
|--------|-----------------|------------|----------|----------|
| Water | WC Method >0.05 | NEG | NEG | NEG |

WEAR METALS

| method | limit/base | current | history1 | history2 |
|----------|---------------------|----------|----------|----------|
| Iron | ppm ASTM D5185m >20 | 0 | 0 | <1 |
| Chromium | ppm ASTM D5185m >20 | 0 | 0 | <1 |
| Nickel | ppm ASTM D5185m >20 | 0 | 0 | 0 |
| Titanium | ppm ASTM D5185m | 0 | 0 | 0 |
| Silver | ppm ASTM D5185m | 0 | 0 | 0 |
| Aluminum | ppm ASTM D5185m >20 | 0 | 0 | <1 |
| Lead | ppm ASTM D5185m >20 | 0 | 0 | 0 |
| Copper | ppm ASTM D5185m >20 | 0 | 0 | <1 |
| Tin | ppm ASTM D5185m >20 | 0 | 0 | <1 |
| Vanadium | ppm ASTM D5185m | 0 | 0 | 0 |
| Cadmium | ppm ASTM D5185m | 0 | 0 | 0 |

ADDITIVES

| method | limit/base | current | history1 | history2 |
|------------|----------------------|--------------|----------|----------|
| Boron | ppm ASTM D5185m 5 | 0 | 0 | 0 |
| Barium | ppm ASTM D5185m 5 | 0 | 0 | 20 |
| Molybdenum | ppm ASTM D5185m 5 | 0 | 0 | <1 |
| Manganese | ppm ASTM D5185m | <1 | 0 | 0 |
| Magnesium | ppm ASTM D5185m 25 | 0 | 0 | 0 |
| Calcium | ppm ASTM D5185m 200 | 0 | 2 | 0 |
| Phosphorus | ppm ASTM D5185m 300 | 403 | 438 | 454 |
| Zinc | ppm ASTM D5185m 370 | 0 | 0 | 22 |
| Sulfur | ppm ASTM D5185m 2500 | 281 | 495 | 522 |

CONTAMINANTS

| method | limit/base | current | history1 | history2 |
|-----------|---------------------|----------|----------|----------|
| Silicon | ppm ASTM D5185m >15 | 2 | 2 | 2 |
| Sodium | ppm ASTM D5185m | 3 | 0 | 3 |
| Potassium | ppm ASTM D5185m >20 | 2 | 0 | 0 |





FLUID CLEANLINESS

| method | limit/base | current | history1 | history2 |
|-----------------|------------------------|-----------------|----------|----------|
| Particles >4µm | ASTM D7647 >10000 | 2935 | 1852 | 5849 |
| Particles >6µm | ASTM D7647 >2500 | 232 | 601 | 1064 |
| Particles >14µm | ASTM D7647 >640 | 25 | 54 | 51 |
| Particles >21µm | ASTM D7647 >160 | 10 | 12 | 13 |
| Particles >38µm | ASTM D7647 >40 | 1 | 1 | 1 |
| Particles >71µm | ASTM D7647 >10 | 0 | 0 | 0 |
| Oil Cleanliness | ISO 4406 (c) >20/18/16 | 19/15/12 | 18/16/13 | 20/17/13 |

FLUID DEGRADATION

| method | limit/base | current | history1 | history2 |
|------------------|--------------------------|-------------|----------|----------|
| Acid Number (AN) | mg KOH/g ASTM D8045 0.57 | 0.19 | 0.18 | 0.24 |


OIL ANALYSIS REPORT

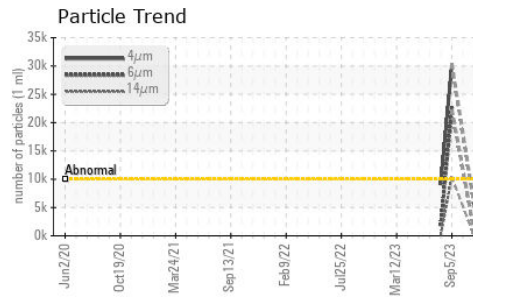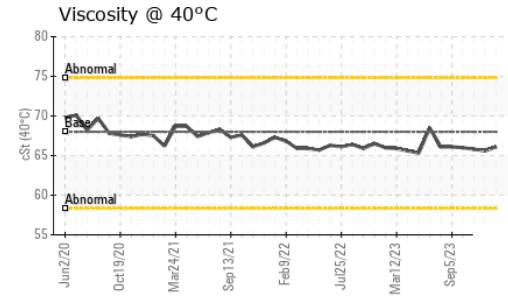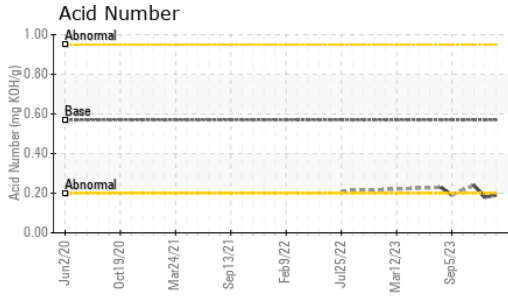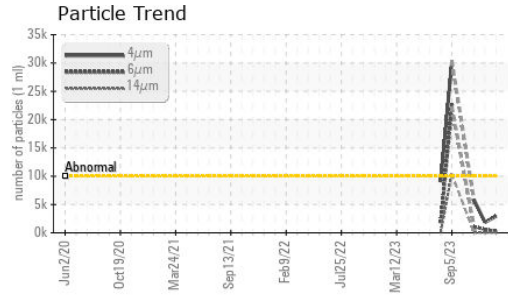






| PARAMETER | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | LIGHT |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.05 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 40°C | cSt | ASTM D445 | 68 | 66.1 | 65.6 |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

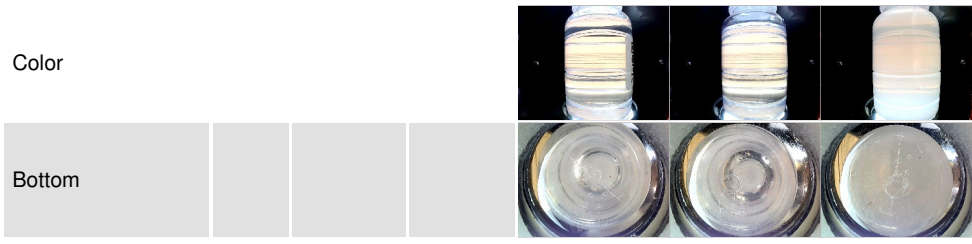

GRAPHS

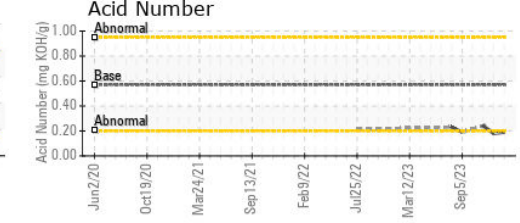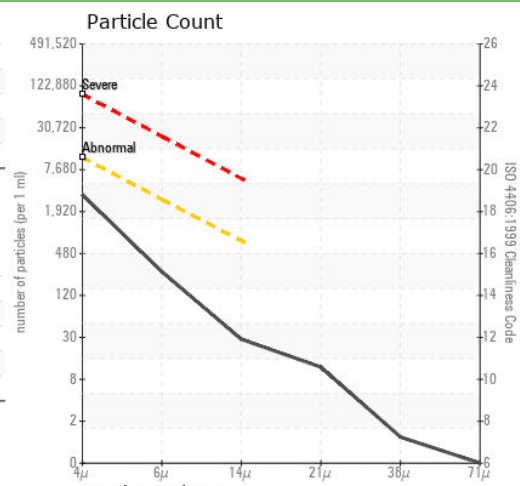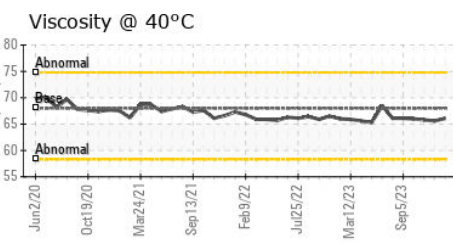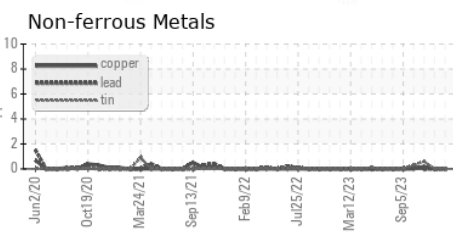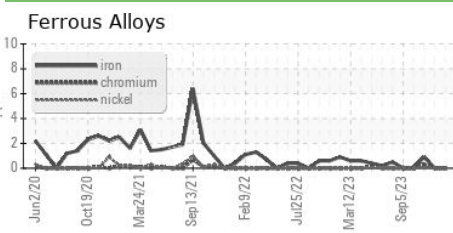

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0113103 **Received** : 29 Dec 2023
Lab Number : 06047757 **Diagnosed** : 02 Jan 2024
Unique Number : 10808365 **Diagnostician** : Doug Bogart
Test Package : IND 2

KraftHeinz - Kirksville - Plant 8333 PCA
 2504 INDUSTRIAL DR
 KIRKSVILLE, MO
 US 63501
 Contact: WALLACE WARD
 wallace.ward@kraftheinzcompany.com
 T: (660)627-1031
 F: (660)627-5887

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)