

## **OIL ANALYSIS REPORT**

#### Area INJECT B ROOM [98666295] Machine Id KR-GR-003238 - REWORK SCREW LOAD (S/N INJECT B - 11513039) Component

Gearbox

#### Fluid PETRO CANADA 220 (6 QTS)

### DIAGNOSIS

#### Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor. ( Customer Sample Comment: 98666295 )

#### Wear


All component wear rates are normal.

#### Contamination

There is a high amount of particulates present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

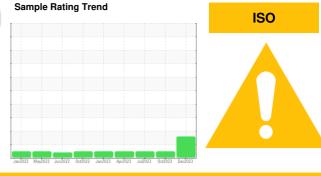


SAMPLE INFORI	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0113112	PCA0106510	PCA0096611
Sample Date		Client Info		26 Dec 2023	10 Oct 2023	17 Jul 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	N/A	N/A
Sample Status				ABNORMAL	NORMAL	NORMAL
CONTAMINAT	ION	method	limit/base	current	history1	history2
Water		WC Method	>0.2	NEG	NEG	NEG
WEAR METAL	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	1	<1	3
Chromium	ppm	ASTM D5185m	>15	0	0	0
Nickel	ppm	ASTM D5185m	>15	0	0	0
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	0	<1	0
Lead	ppm	ASTM D5185m	>100	0	0	0
Copper	ppm	ASTM D5185m	>200	0	<1	0
Tin	ppm	ASTM D5185m	>25	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	1
Molybdenum	ppm	ASTM D5185m		0	0	<1
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		0	0	<1
Calcium	ppm	ASTM D5185m		0	0	9
Phosphorus	ppm	ASTM D5185m		259	396	295
Zinc	ppm	ASTM D5185m		0	0	10
Sulfur	ppm	ASTM D5185m		10021	3365	12792
CONTAMINAN	TS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	1	3	<1
Sodium	ppm	ASTM D5185m		5	1	3
Potassium	ppm	ASTM D5185m	>20	2	0	<1
FLUID CLEAN	INESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	<b>A</b> 108155		
Particles >6µm		ASTM D7647	>2500	<u> </u>		
Particles >14µm		ASTM D7647	>640	<u> </u>		
Particles >21µm		ASTM D7647	>160	120		
Particles >38µm		ASTM D7647	>40	3		
Particles >71µm		ASTM D7647	>10	0		
Oil Cleanliness		ISO 4406 (c)	>20/18/16	<b>A</b> 24/22/17		
FLUID DEGRAD		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.43	0.47	


Report Id: KRAKIR [WUSCAR] 06047761 (Generated: 01/02/2024 09:19:17) Rev: 1


Submitted By: Wilberto Pacheco Garcia



# **OIL ANALYSIS REPORT**

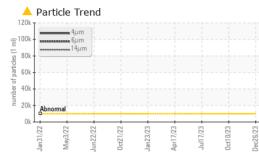


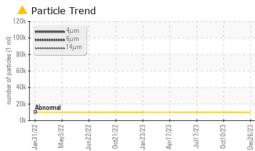

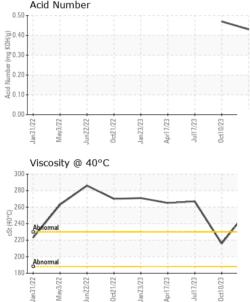

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPE	RTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445		257	216	267
SAMPLE IMAG	iES	method	limit/base	current	history1	history2
Color						

Bottom

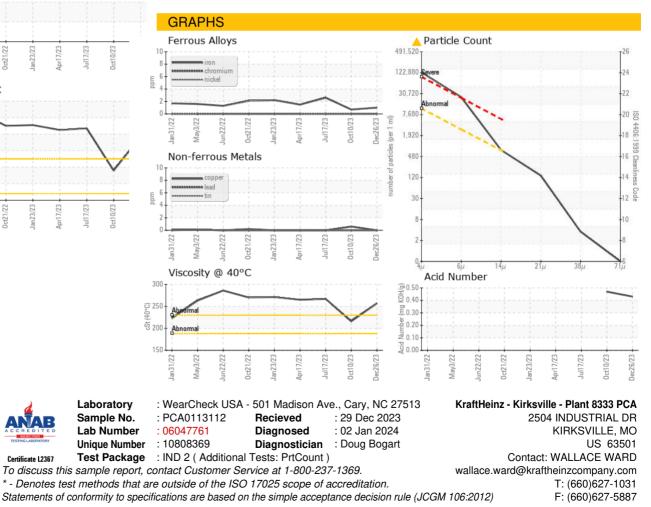

Submitted By: Wilberto Pacheco Garcia