




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

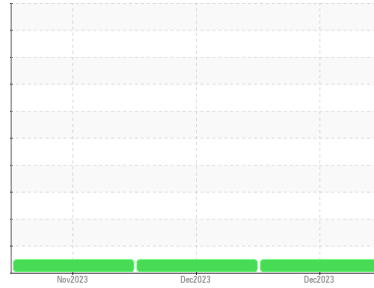

Machine Id  
**827M**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (36 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0104272</b>	GFL0104139	GFL0059268
Sample Date	Client Info		<b>27 Dec 2023</b>	01 Dec 2023	15 Nov 2023
Machine Age	hrs	Client Info	<b>15210</b>	15033	14852
Oil Age	hrs	Client Info	<b>15210</b>	15033	14852
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >130	<b>13</b>	40	63
Chromium	ppm	ASTM D5185m >10	<b>&lt;1</b>	1	2
Nickel	ppm	ASTM D5185m >4	<b>0</b>	<1	5
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	3	2
Lead	ppm	ASTM D5185m >20	<b>0</b>	2	<1
Copper	ppm	ASTM D5185m >125	<b>&lt;1</b>	12	14
Tin	ppm	ASTM D5185m >4	<b>0</b>	<1	2
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>1</b>	5	<1
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>59</b>	62	59
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	1
Magnesium	ppm	ASTM D5185m 1010	<b>969</b>	953	872
Calcium	ppm	ASTM D5185m 1070	<b>1092</b>	1204	1025
Phosphorus	ppm	ASTM D5185m 1150	<b>1021</b>	1077	910
Zinc	ppm	ASTM D5185m 1270	<b>1256</b>	1312	1196
Sulfur	ppm	ASTM D5185m 2060	<b>3014</b>	3539	1797

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	16	9
Sodium	ppm	ASTM D5185m	<b>1</b>	0	7
Potassium	ppm	ASTM D5185m >20	<b>2</b>	3	2

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >6	<b>0.4</b>	0.9	1.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.8</b>	13.5	10.9
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.2</b>	25.1	23.5

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.3</b>	26.1	21.5
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.2</b>	5.7	5.2







# OIL ANALYSIS REPORT

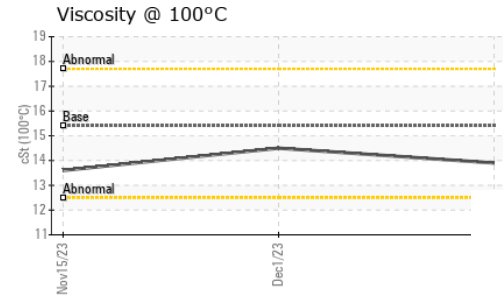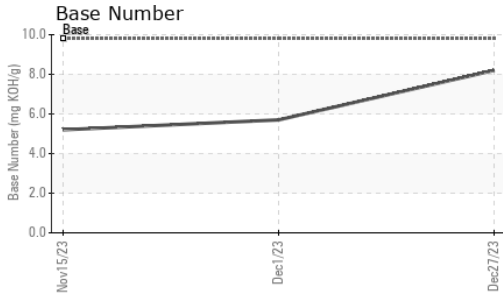

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.9</b>	14.5	13.6

## GRAPHS

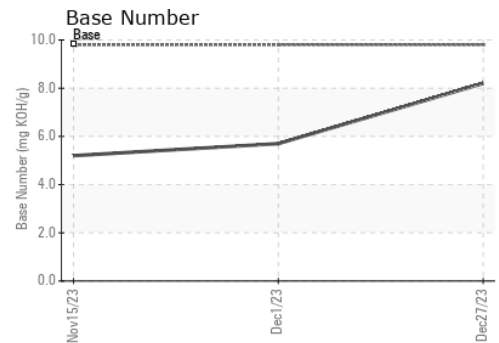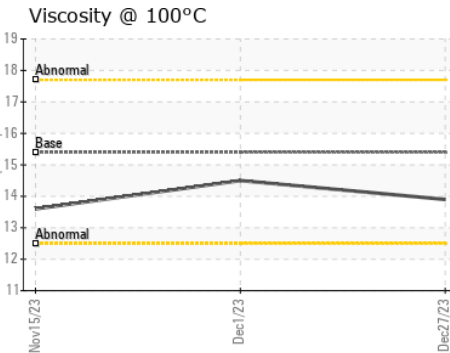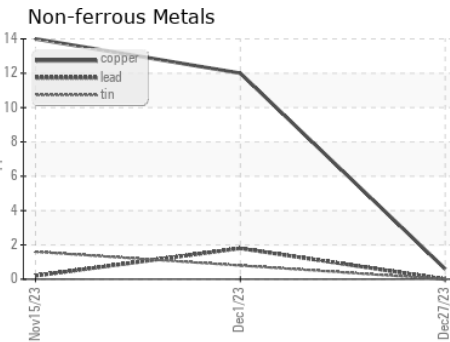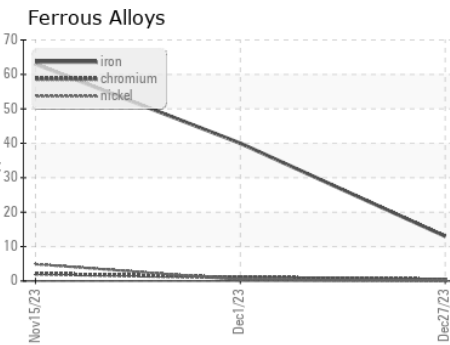

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0104272 **Received** : 29 Dec 2023  
**Lab Number** : **06048136** **Diagnosed** : 02 Jan 2024  
**Unique Number** : 10808744 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 410 - Michigan West**  
 39000 Van Born Rd  
 Wayne, MI  
 US 48184  
 Contact: Belal Dgheish  
 bdgheish@gflenv.com  
 T: (734)714-2340  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)