




# OIL ANALYSIS REPORT

Sample Rating Trend

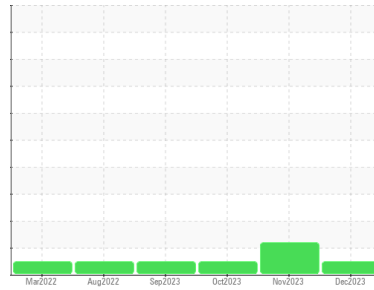

**NORMAL**



Machine Id  
**4611M**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (36 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0104314</b>	GFL0059245	GFL0059135
Sample Date	Client Info		<b>27 Dec 2023</b>	15 Nov 2023	23 Oct 2023
Machine Age	hrs	Client Info	<b>21327</b>	21061	20937
Oil Age	hrs	Client Info	<b>21203</b>	21061	20937
Oil Changed	Client Info		<b>N/A</b>	Not Changd	Changed
Sample Status			<b>NORMAL</b>	ABNORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >90	<b>13</b>	87	14
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	4	<1
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m >20	<b>&lt;1</b>	8	8
Lead	ppm	ASTM D5185m >40	<b>0</b>	2	1
Copper	ppm	ASTM D5185m >330	<b>3</b>	4	1
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	2	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>2</b>	5	3
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>59</b>	63	58
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>964</b>	957	899
Calcium	ppm	ASTM D5185m 1070	<b>1105</b>	1110	1058
Phosphorus	ppm	ASTM D5185m 1150	<b>983</b>	1045	921
Zinc	ppm	ASTM D5185m 1270	<b>1232</b>	1310	1199
Sulfur	ppm	ASTM D5185m 2060	<b>2872</b>	2604	2320

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	14	12
Sodium	ppm	ASTM D5185m	<b>3</b>	11	63
Potassium	ppm	ASTM D5185m >20	<b>2</b>	<1	2

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >6	<b>0.5</b>	1.6	0.6
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.1</b>	16.8	9.4
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.5</b>	30.1	21.9

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.6</b>	31.5	18.8
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>7.4</b>	▲ 3.2	6.1







# OIL ANALYSIS REPORT

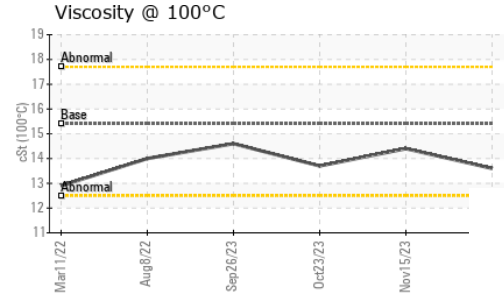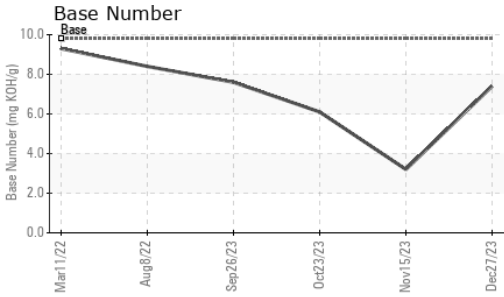

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.6</b>	14.4	13.7

## GRAPHS

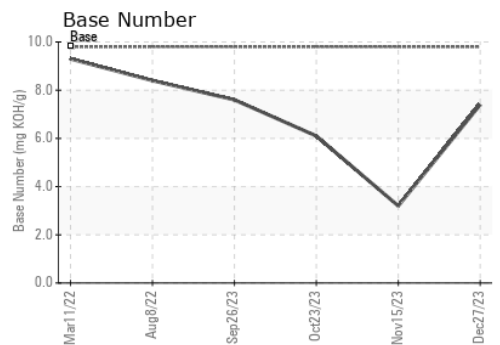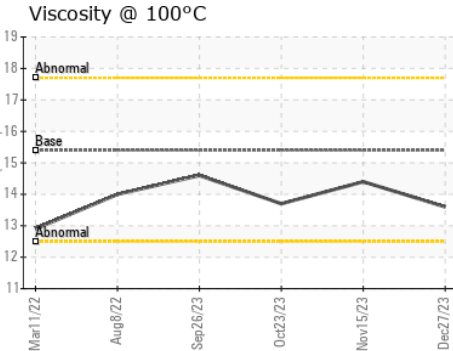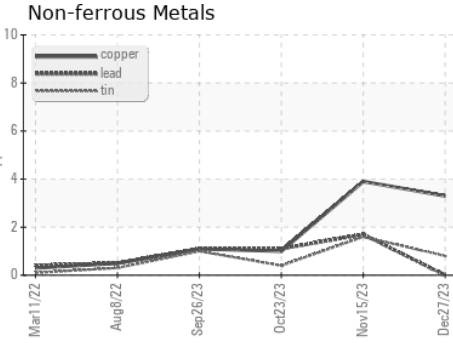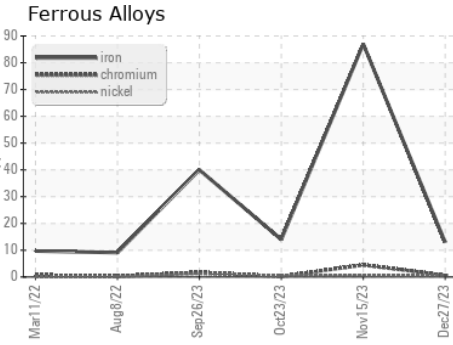

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0104314 **Received** : 29 Dec 2023  
**Lab Number** : **06048142** **Diagnosed** : 02 Jan 2024  
**Unique Number** : 10808750 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 410 - Michigan West**  
 39000 Van Born Rd  
 Wayne, MI  
 US 48184  
 Contact: Belal Dgheish  
 bdgheish@gflenv.com  
 T: (734)714-2340  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)