




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area  
**MONTGOMERY**  
 Machine Id  
**MACK 920107**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- LTR)**

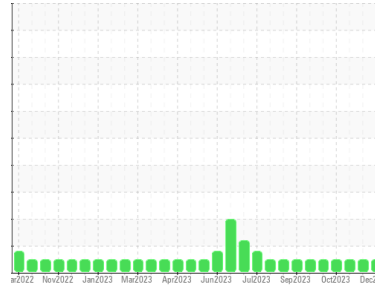

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2    |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>GFL0091311</b>  | GFL0091260  | GFL0092399  |
| Sample Date   | Client Info |             | <b>28 Dec 2023</b> | 04 Dec 2023 | 31 Oct 2023 |
| Machine Age   | hrs         | Client Info | <b>8170</b>        | 8029        | 7764        |
| Oil Age       | hrs         | Client Info | <b>1140</b>        | 999         | 734         |
| Oil Changed   | Client Info |             | <b>Not Chngd</b>   | Not Chngd   | Not Chngd   |
| Sample Status |             |             | <b>NORMAL</b>      | NORMAL      | NORMAL      |

## CONTAMINATION

|        | method    | limit/base | current        | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel   | WC Method | >3.0       | <b>&lt;1.0</b> | <1.0     | <1.0     |
| Water  | WC Method | >0.2       | <b>NEG</b>     | NEG      | NEG      |
| Glycol | WC Method |            | <b>NEG</b>     | NEG      | NEG      |

## WEAR METALS

|          | method | limit/base       | current      | history1 | history2 |
|----------|--------|------------------|--------------|----------|----------|
| Iron     | ppm    | ASTM D5185m >120 | <b>35</b>    | 21       | 61       |
| Chromium | ppm    | ASTM D5185m >20  | <b>&lt;1</b> | <1       | 1        |
| Nickel   | ppm    | ASTM D5185m >5   | <b>&lt;1</b> | <1       | 1        |
| Titanium | ppm    | ASTM D5185m >2   | <b>&lt;1</b> | <1       | <1       |
| Silver   | ppm    | ASTM D5185m >2   | <b>0</b>     | 0        | <1       |
| Aluminum | ppm    | ASTM D5185m >20  | <b>1</b>     | 2        | 3        |
| Lead     | ppm    | ASTM D5185m >40  | <b>&lt;1</b> | <1       | <1       |
| Copper   | ppm    | ASTM D5185m >330 | <b>1</b>     | <1       | 2        |
| Tin      | ppm    | ASTM D5185m >15  | <b>&lt;1</b> | <1       | <1       |
| Vanadium | ppm    | ASTM D5185m      | <b>0</b>     | <1       | <1       |
| Cadmium  | ppm    | ASTM D5185m      | <b>0</b>     | 0        | <1       |

## ADDITIVES

|            | method | limit/base       | current      | history1 | history2 |
|------------|--------|------------------|--------------|----------|----------|
| Boron      | ppm    | ASTM D5185m 0    | <b>2</b>     | 2        | 0        |
| Barium     | ppm    | ASTM D5185m 0    | <b>0</b>     | 0        | <1       |
| Molybdenum | ppm    | ASTM D5185m 60   | <b>62</b>    | 55       | 65       |
| Manganese  | ppm    | ASTM D5185m 0    | <b>&lt;1</b> | <1       | <1       |
| Magnesium  | ppm    | ASTM D5185m 1010 | <b>975</b>   | 934      | 1014     |
| Calcium    | ppm    | ASTM D5185m 1070 | <b>1104</b>  | 837      | 1086     |
| Phosphorus | ppm    | ASTM D5185m 1150 | <b>965</b>   | 826      | 1034     |
| Zinc       | ppm    | ASTM D5185m 1270 | <b>1279</b>  | 1012     | 1317     |
| Sulfur     | ppm    | ASTM D5185m 2060 | <b>2799</b>  | 2456     | 3404     |

## CONTAMINANTS

|           | method | limit/base      | current  | history1 | history2 |
|-----------|--------|-----------------|----------|----------|----------|
| Silicon   | ppm    | ASTM D5185m >25 | <b>7</b> | 7        | 10       |
| Sodium    | ppm    | ASTM D5185m     | <b>5</b> | 3        | 7        |
| Potassium | ppm    | ASTM D5185m >20 | <b>2</b> | 4        | 3        |

## INFRA-RED



|           | method   | limit/base      | current     | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot %    | %        | *ASTM D7844 >4  | <b>1</b>    | 0.8      | 1.4      |
| Nitration | Abs/cm   | *ASTM D7624 >20 | <b>10.6</b> | 9.6      | 11.6     |
| Sulfation | Abs/.1mm | *ASTM D7415 >30 | <b>22.3</b> | 20.8     | 24.8     |

## FLUID DEGRADATION

|                  | method   | limit/base      | current     | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Oxidation        | Abs/.1mm | *ASTM D7414 >25 | <b>19.4</b> | 17.5     | 22.1     |
| Base Number (BN) | mg KOH/g | ASTM D2896 9.8  | <b>5.4</b>  | 6.7      | 5.0      |







# OIL ANALYSIS REPORT

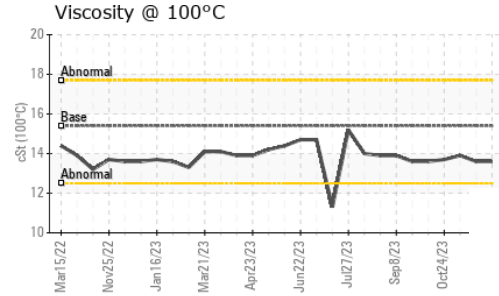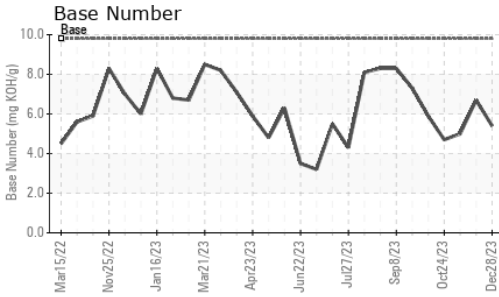

| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |

| FLUID PROPERTIES | method | limit/base | current | history1    | history2 |      |
|------------------|--------|------------|---------|-------------|----------|------|
| Visc @ 100°C     | cSt    | ASTM D445  | 15.4    | <b>13.6</b> | 13.6     | 13.9 |

## GRAPHS

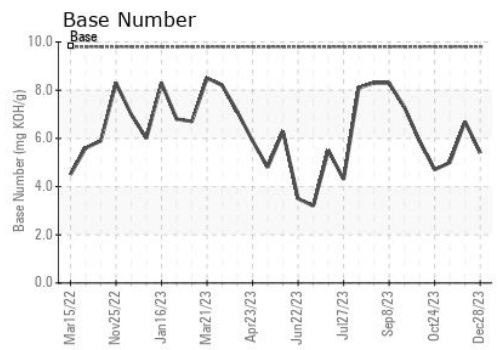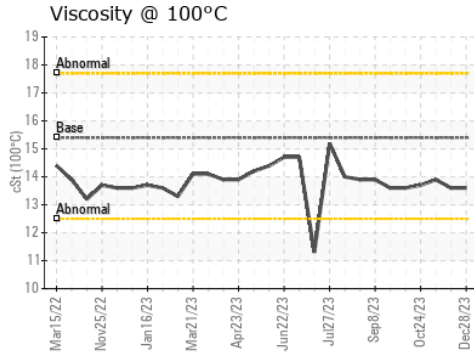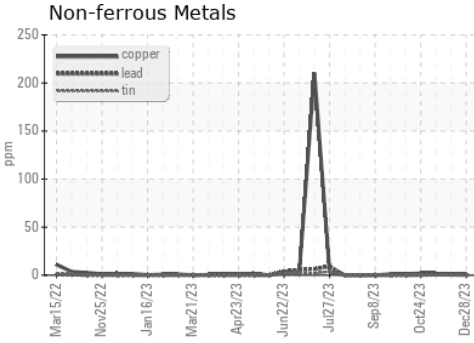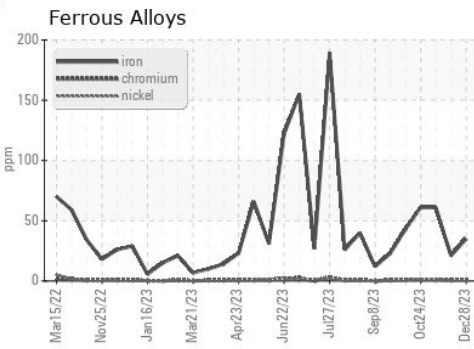

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0091311 **Received** : 29 Dec 2023  
**Lab Number** : **06048210** **Diagnosed** : 02 Jan 2024  
**Unique Number** : 10808818 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 955 - Montgomery**  
 1121 Wilbanks St  
 Montgomery, AL  
 US 36108  
 Contact: LISA REEVES

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: