


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

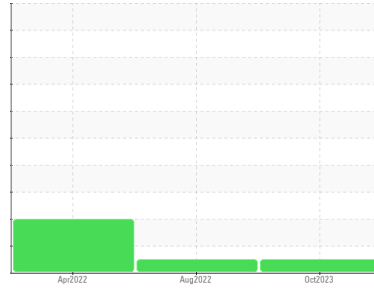

Machine Id
621539

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 10W30 (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0097386	PCA0071679	PCA0061099
Sample Date	Client Info		10 Oct 2023	17 Aug 2022	27 Apr 2022
Machine Age	mls	Client Info	32080	12810	8545
Oil Age	mls	Client Info	9270	12810	8545
Oil Changed	Client Info		Changed	Changed	Not Chngd
Sample Status			NORMAL	NORMAL	ATTENTION

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	31	41	34
Chromium	ppm	ASTM D5185m >20	3	4	2
Nickel	ppm	ASTM D5185m >4	<1	2	1
Titanium	ppm	ASTM D5185m	58	3	<1
Silver	ppm	ASTM D5185m >3	<1	2	2
Aluminum	ppm	ASTM D5185m >20	18	39	▲ 23
Lead	ppm	ASTM D5185m >40	2	7	2
Copper	ppm	ASTM D5185m >330	246	131	102
Tin	ppm	ASTM D5185m >15	2	7	6
Vanadium	ppm	ASTM D5185m	<1	2	0
Cadmium	ppm	ASTM D5185m	0	<1	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	34	44	58
Barium	ppm	ASTM D5185m 0	0	1	0
Molybdenum	ppm	ASTM D5185m 50	21	39	40
Manganese	ppm	ASTM D5185m 0	1	4	3
Magnesium	ppm	ASTM D5185m 950	538	530	561
Calcium	ppm	ASTM D5185m 1050	1716	1648	1650
Phosphorus	ppm	ASTM D5185m 995	896	789	770
Zinc	ppm	ASTM D5185m 1180	1240	927	901
Sulfur	ppm	ASTM D5185m 2600	3080	2575	2217

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	6	9	6
Sodium	ppm	ASTM D5185m	3	6	4
Potassium	ppm	ASTM D5185m >20	45	91	▲ 64



INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.6	0.3	0.2
Nitration	Abs/cm	*ASTM D7624 >20	9.6	8.0	6.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	21.5	24.2	21.8

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	17.0	21.1	18.4
Base Number (BN)	mg KOH/g	ASTM D2896	6.5	10.6	9.6









OIL ANALYSIS REPORT

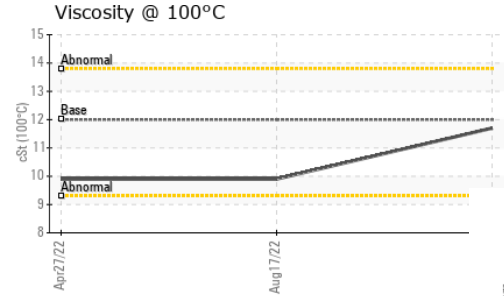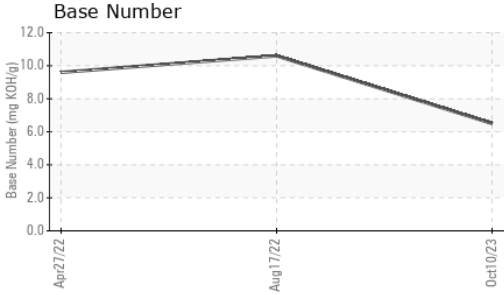

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	11.7	9.9

GRAPHS

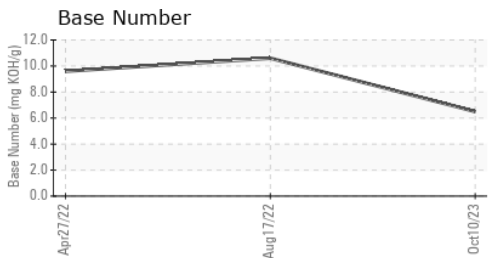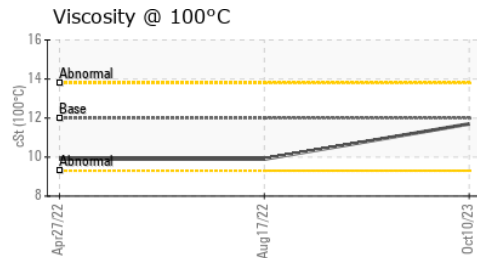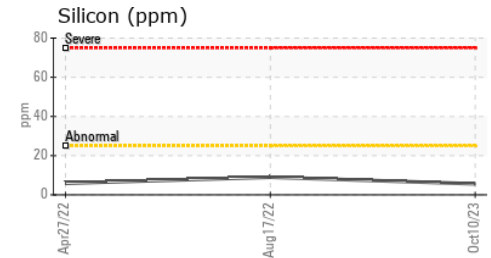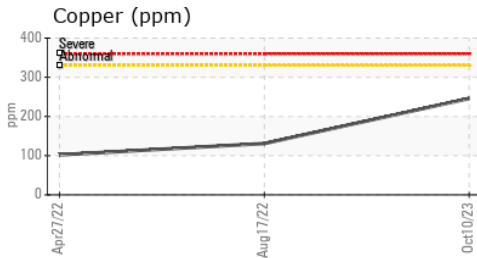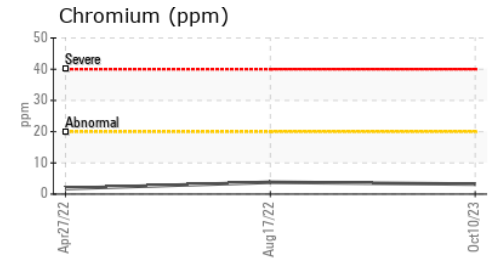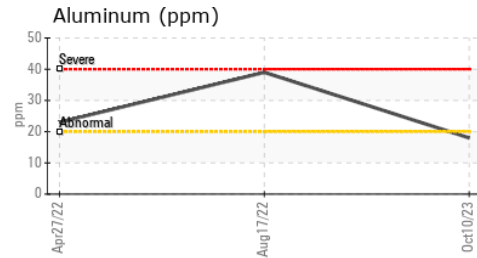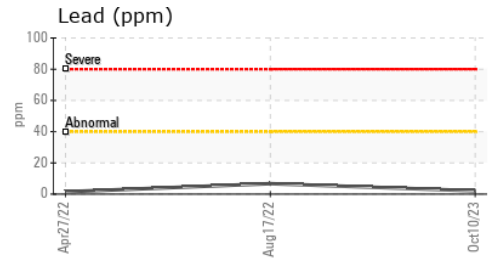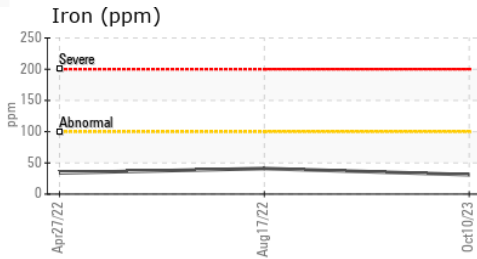

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0097386 **Recieved** : 29 Dec 2023
Lab Number : 06048235 **Diagnosed** : 02 Jan 2024
Unique Number : 10808843 **Diagnostician** : Don Baldrige
Test Package : MOB 1 (Additional Tests: TBN)

MILLER TRUCK LEASING #123
 66 KELLER AVENUE
 LANCASTER, PA
 US 17601
 Contact: RON ROBERTS
 roberts@millertransgroup.com
 T: (717)945-6205
 F: (717)945-5818

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)