

# **OIL ANALYSIS REPORT**

Sample Rating Trend

WEAR



Machine Id **637097** 

Component **Diesel Engine** 

PETRO CANADA DURON SHP 10W30 (--- QTS)

## DIAGNOSIS

### Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

## Wear

The copper level is abnormal. In the absence of other significant wear metals, suspect copper due to sources other than wear (i.e. cooling core). All other component wear rates are normal.

#### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. No other contaminants were detected in the oil.

### **Fluid Condition**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

TS)				Dec2023			
SAMPLE INFOR	RMATION	<b>M</b> method	limit/base	current	history1	history2	
Sample Number		Client Info		PCA0113614			
Sample Date		Client Info		01 Dec 2023			
Machine Age	mls	Client Info		69729			
Dil Age	mls	Client Info		0			
Oil Changed		Client Info		Changed			
Sample Status				ABNORMAL			
CONTAMINA	TION	method	limit/base	current	history1	history2	
uel		WC Method	>5	<1.0			
Vater		WC Method	>0.2	NEG			
alycol		WC Method		NEG			
WEAR META	LS	method	limit/base	current	history1	history2	
ron	ppm	ASTM D5185m	>100	95			
Chromium	ppm	ASTM D5185m	>20	1			
lickel	ppm	ASTM D5185m	>4	0			
itanium	ppm	ASTM D5185m		0			
Silver	ppm	ASTM D5185m	>3	0			
Numinum	ppm	ASTM D5185m	>20	87			
.ead	ppm	ASTM D5185m	>40	0			
Copper	ppm	ASTM D5185m	>330	<b>409</b>			
īn	ppm	ASTM D5185m	>15	0			
/anadium	ppm	ASTM D5185m		0			
Cadmium	ppm	ASTM D5185m		0			
ADDITIVES		method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	2	13			
Barium	ppm	ASTM D5185m	0	5			
Nolybdenum	ppm	ASTM D5185m	50	45			
Manganese	ppm	ASTM D5185m	0	0			
//agnesium	ppm	ASTM D5185m	950	553			
Calcium	ppm	ASTM D5185m	1050	1727			
Phosphorus	ppm	ASTM D5185m	995	772			
inc .	ppm	ASTM D5185m	1180	952			
Sulfur	ppm	ASTM D5185m	2600	2119			
CONTAMINA	NTS	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	4			
Sodium	ppm	ASTM D5185m		0			
Potassium	ppm	ASTM D5185m	>20	260			
INFRA-RED		method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	1.4			
Nitration	Abs/cm	*ASTM D7624	>20	12.6			
Sulfation	Abs/.1mm	*ASTM D7415	>30	25.2			
FLUID DEGRA	DATION	method	limit/base	current	history1	history2	
2.1.1.1		*******					

Oxidation

26.5


6.2

Abs/.1mm \*ASTM D7414 >25

Base Number (BN) mg KOH/g ASTM D2896



# **OIL ANALYSIS REPORT**

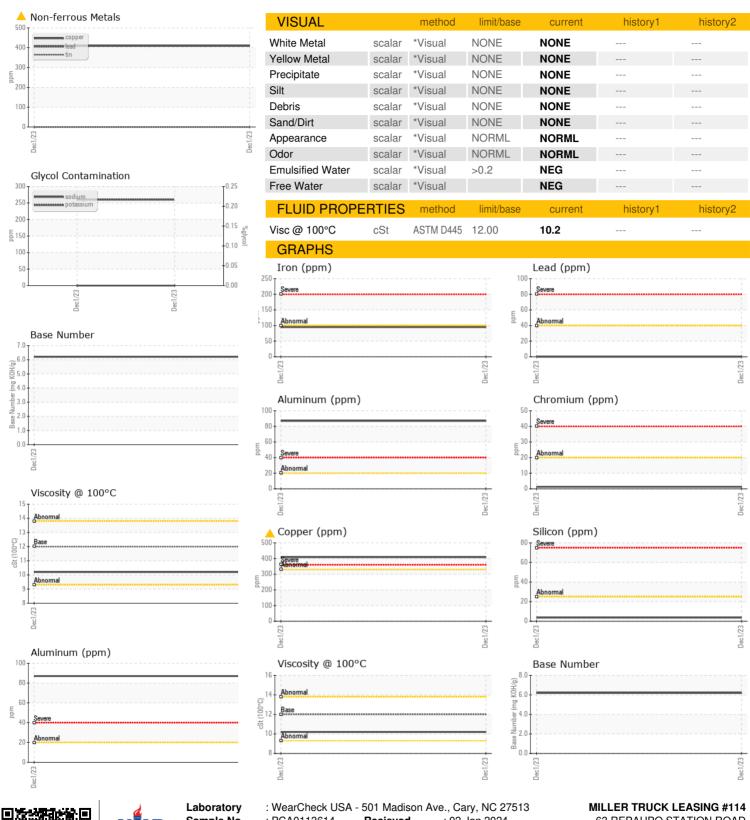



Certificate L2367

Sample No. Lab Number

**Unique Number** 

: PCA0113614 : 06048594 : 10809202

Recieved Diagnosed

: 02 Jan 2024 Diagnostician : Don Baldridge

: 03 Jan 2024

Test Package : MOB 1 ( Additional Tests: TBN ) To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**63 REPAUPO STATION ROAD** LOGAN TOWNSHIP, NJ US 08085

Contact: ED DAVIS edavis@millertransgroup.com

T: (856)214-3521 F: (856)214-3663

Contact/Location: ED DAVIS - MILLOG