

OIL ANALYSIS REPORT







Machine Id 621544 Component Diesel Engine

Fluid PETRO CANADA DURON SHP 10W30 (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.


Contamination

Elevated aluminum (AI) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


| | | | | Dec2023 | | |
|---|--|---|---|--|--|--|
| SAMPLE INFORM | MATION | method | limit/base | current | history1 | history2 |
| Sample Number | | Client Info | | PCA0105812 | | |
| Sample Date | | Client Info | | 05 Dec 2023 | | |
| Machine Age | mls | Client Info | | 117035 | | |
| Oil Age | mls | Client Info | | 0 | | |
| Oil Changed | | Client Info | | Changed | | |
| Sample Status | | | | NORMAL | | |
| CONTAMINAT | ION | method | limit/base | current | history1 | history2 |
| Fuel | | WC Method | >5 | <1.0 | | |
| Water | | WC Method | >0.2 | NEG | | |
| Glycol | | WC Method | | NEG | | |
| WEAR METAL | S | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >100 | 54 | | |
| Chromium | ppm | ASTM D5185m | >20 | 1 | | |
| Nickel | ppm | ASTM D5185m | >4 | 0 | | |
| Titanium | ppm | ASTM D5185m | | 0 | | |
| Silver | ppm | ASTM D5185m | >3 | 0 | | |
| Aluminum | ppm | ASTM D5185m | >20 | 11 | | |
| Lead | ppm | ASTM D5185m | >40 | 0 | | |
| Copper | ppm | ASTM D5185m | >330 | 148 | | |
| Tin | ppm | ASTM D5185m | >15 | 0 | | |
| Vanadium | ppm | ASTM D5185m | | 0 | | |
| Cadmium | ppm | ASTM D5185m | | 0 | | |
| | | | | | | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| ADDITIVES Boron | ppm | method ASTM D5185m | limit/base | current 0 | history1 | history2 |
| | ppm ppm | | | | | |
| Boron | | ASTM D5185m | 2 | 0 | | |
| Boron Barium | ppm | ASTM D5185m ASTM D5185m | 2 0 | 0 4 | | |
| Boron Barium Molybdenum | ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m | 2 0 50 | 0 4 65 | | |
| Boron Barium Molybdenum Manganese | ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | 2 0 50 0 | 0 4 65 0 | | |
| Boron Barium Molybdenum Manganese Magnesium | ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | 2 0 50 0 950 | 0 4 65 0 786 | | |
| Boron Barium Molybdenum Manganese Magnesium Calcium | ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | 2 0 50 0 950 1050 | 0 4 65 0 786 1360 | | |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus | ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | 2 0 50 0 950 1050 995 | 0 4 65 0 786 1360 895 | | |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc | ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | 2 0 50 0 950 1050 995 1180 | 0 4 65 0 786 1360 895 1111 | | |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur | ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | 2 0 50 950 1050 995 1180 2600 | 0 4 65 0 786 1360 895 1111 2323 | | |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN | ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | 2 0 50 950 1050 995 1180 2600 | 0 4 65 0 786 1360 895 1111 2323 current | history1 | history2 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon | ppm ppm ppm ppm ppm ppm ppm ppm TS | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | 2 0 50 950 1050 995 1180 2600 | 0 4 65 0 786 1360 895 1111 2323 current <1 | history1 | history2 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium | ppm ppm ppm ppm ppm ppm ppm ppm TS | ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m | 2 0 50 0 950 1050 995 1180 2600 limit/base >25 | 0 4 65 0 786 1360 895 1111 2323 current <1 0 | history1 | history2 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium | ppm ppm ppm ppm ppm ppm ppm ppm TS | ASTM D5185m ASTM D5185m | 2 0 50 0 950 1050 995 1180 2600 limit/base >25 >20 | 0 4 65 0 786 1360 895 1111 2323 current <1 0 40 | history1 | history2 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED | ppm ppm ppm ppm ppm ppm ppm ppm TS ppm ppm | ASTM D5185m ASTM D5185m | 2 0 50 0 950 1050 995 1180 2600 imit/base >25 -20 imit/base | 0 4 65 0 786 1360 895 1111 2323 current <1 0 40 current | history1 history1 | history2 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % | ppm ppm ppm ppm ppm ppm ppm ppm TS ppm ppm | ASTM D5185m ASTM D5185m | 2 0 50 0 950 1050 995 1180 2600 imit/base >25 >20 imit/base >3 >20 | 0 4 65 0 786 1360 895 1111 2323 current <1 0 40 current 1.3 | history1 history1 | history2 history2 history2 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration | ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m | 2 0 50 0 950 1050 995 1180 2600 imit/base >25 >20 imit/base >3 >20 | 0 4 65 0 786 1360 895 1111 2323 current <1 0 40 40 current 1.3 12.4 | history1 history1 | history2 history2 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation | ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm | ASTM D5185m ASTM D5185m | 2 0 50 0 950 1050 995 1180 2600 imit/base >25 20 imit/base >3 >20 >3 | 0 4 65 0 786 1360 895 1111 2323 current <1 0 40 current 1.3 12.4 24.1 | history1 history1 history1 | history2 history2 |
| Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation | ppm ppm ppm ppm ppm ppm ppm ppm TS ppm ppm ppm ppm | ASTM D5185m ASTM D7844 *ASTM D7844 *ASTM D7844 | 2 0 50 0 950 1050 995 1180 2600 imit/base >25 >20 imit/base >3 >20 >30 | 0 4 65 0 786 1360 895 1111 2323 current <1 0 40 current 1.3 12.4 24.1 current | history1 history1 history1 | history2 history2 history2 history2 |






OIL ANALYSIS REPORT





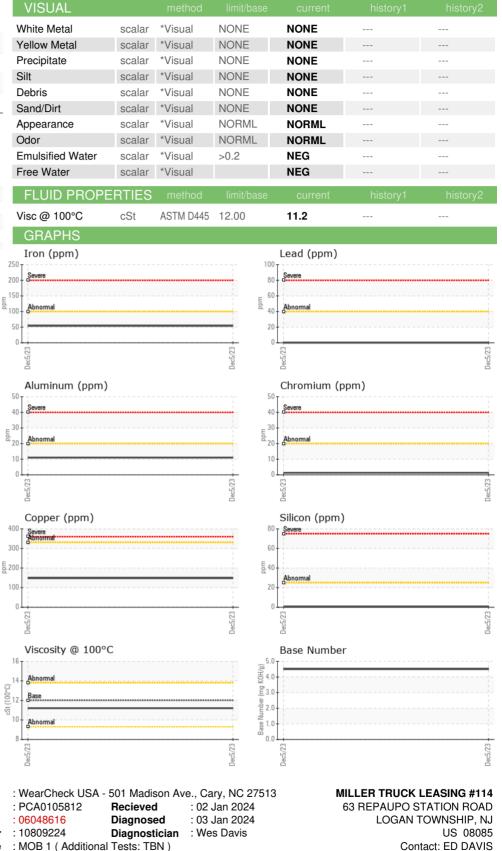

Unique Number Test Package : MOB 1 (Additional Tests: TBN) Certificate L2367 edavis@millertransgroup.com To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

, ts

Laboratory

Sample No.

Lab Number

Contact/Location: ED DAVIS - MILLOG

T: (856)214-3521

F: (856)214-3663