


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

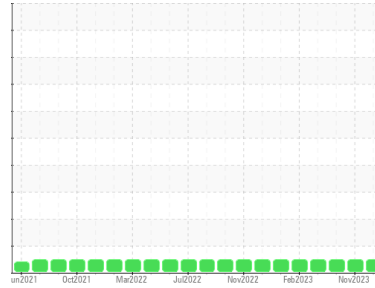

Area  
**Plymouth & Brockton**  
Machine Id  
**439**

Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (36 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PCA0104398</b>	PCA0104679	PCA0104568
Sample Date	Client Info	<b>22 Dec 2023</b>	08 Nov 2023	03 Oct 2023
Machine Age	mls	<b>287762</b>	274881	264114
Oil Age	mls	<b>12000</b>	24000	12000
Oil Changed	Client Info	<b>Not Changed</b>	Changed	Not Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >165	<b>8</b>	18	11
Chromium	ppm ASTM D5185m >5	<b>&lt;1</b>	<1	<1
Nickel	ppm ASTM D5185m >4	<b>0</b>	0	0
Titanium	ppm ASTM D5185m >2	<b>1</b>	0	<1
Silver	ppm ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>2</b>	2	<1
Lead	ppm ASTM D5185m >150	<b>&lt;1</b>	0	0
Copper	ppm ASTM D5185m >90	<b>&lt;1</b>	0	<1
Tin	ppm ASTM D5185m >5	<b>&lt;1</b>	<1	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>16</b>	4	2
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>58</b>	61	55
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	0
Magnesium	ppm ASTM D5185m 1010	<b>898</b>	946	863
Calcium	ppm ASTM D5185m 1070	<b>1035</b>	1111	1045
Phosphorus	ppm ASTM D5185m 1150	<b>983</b>	1014	881
Zinc	ppm ASTM D5185m 1270	<b>1216</b>	1290	1145
Sulfur	ppm ASTM D5185m 2060	<b>3018</b>	2919	2626

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >35	<b>3</b>	4	3
Sodium	ppm ASTM D5185m	<b>2</b>	<1	2
Potassium	ppm ASTM D5185m >20	<b>&lt;1</b>	0	<1



## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >7.5	<b>1.2</b>	2.2	1.4
Nitration	Abs/cm *ASTM D7624 >20	<b>7.5</b>	11.2	9.1
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>19.4</b>	25.3	21.3

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>13.3</b>	18.9	15.7
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>9.47</b>	6.95	8.97









# OIL ANALYSIS REPORT

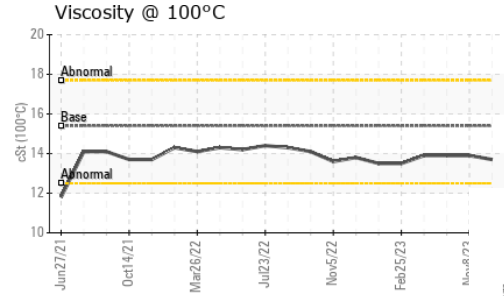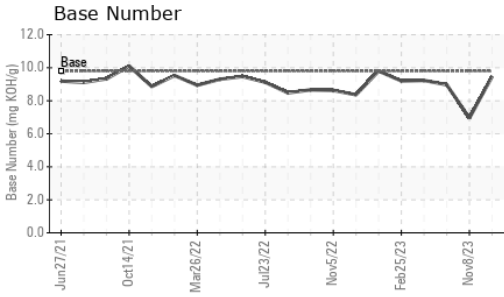

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.7</b>	13.9	13.9

## GRAPHS

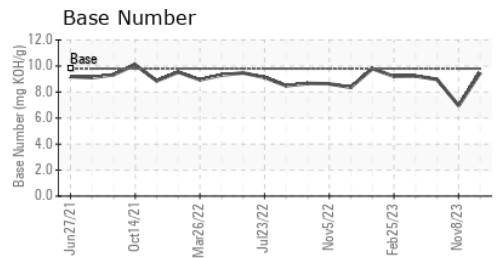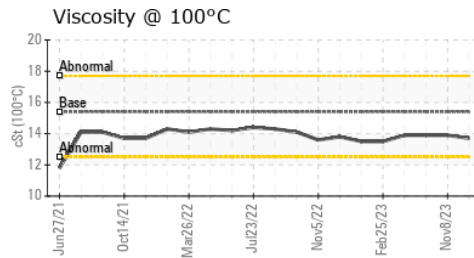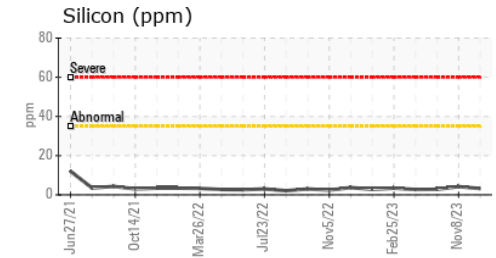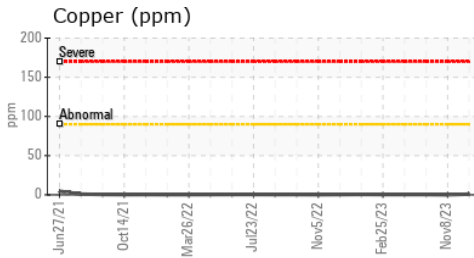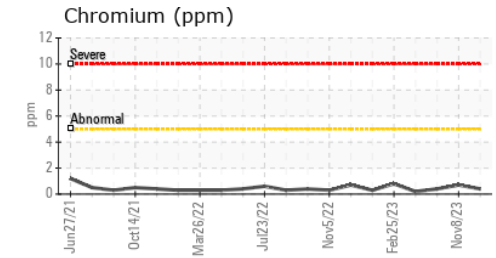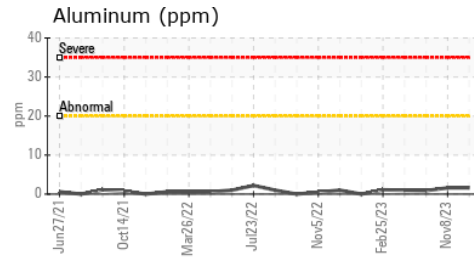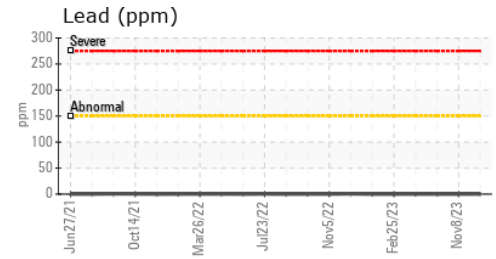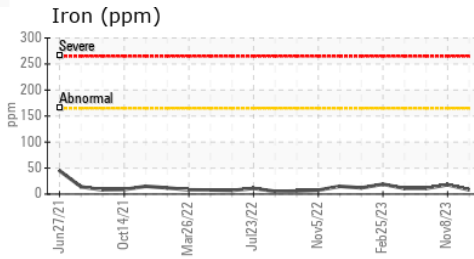

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0104398 **Recieved** : 02 Jan 2024  
**Lab Number** : **06049116** **Diagnosed** : 03 Jan 2024  
**Unique Number** : 10809724 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2

**PLYMOUTH & BROCKTON**  
 8 INDUSTRIAL PARK RD  
 PLYMOUTH, MA  
 US 02360  
 Contact: Donald Pelquin  
 Dpelquin@P-B.com  
 T: (508)732-6039  
 F: (508)732-6091

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)