

OIL ANALYSIS REPORT

Sample Rating Trend

VISCOSITY

Area
KEMP QUARRIES / PRYOR STONE [68222]
 Machine Id
WL154
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)



DIAGNOSIS

Recommendation
 Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. (Customer Sample Comment: PM-4 changed fluid and filters new product)

Wear
 All component wear rates are normal.

Contamination
 Fuel content negligible. There is no indication of any contamination in the oil.

Fluid Condition
 The oil viscosity is lower than normal. Additive levels indicate the addition of a different brand, or type of oil. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PCA0070674	---	---
Sample Date	Client Info	08 Dec 2023	---	---
Machine Age	hrs Client Info	1153	---	---
Oil Age	hrs Client Info	1153	---	---
Oil Changed	Client Info	Changed	---	---
Sample Status		ABNORMAL	---	---

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	---	---
Glycol	WC Method	NEG	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	3	---	---
Chromium	ppm ASTM D5185m >20	0	---	---
Nickel	ppm ASTM D5185m >4	0	---	---
Titanium	ppm ASTM D5185m	0	---	---
Silver	ppm ASTM D5185m >3	0	---	---
Aluminum	ppm ASTM D5185m >20	2	---	---
Lead	ppm ASTM D5185m >40	0	---	---
Copper	ppm ASTM D5185m >330	<1	---	---
Tin	ppm ASTM D5185m >15	0	---	---
Vanadium	ppm ASTM D5185m	0	---	---
Cadmium	ppm ASTM D5185m	0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	▲ 332	---	---
Barium	ppm ASTM D5185m 0	0	---	---
Molybdenum	ppm ASTM D5185m 60	116	---	---
Manganese	ppm ASTM D5185m 0	0	---	---
Magnesium	ppm ASTM D5185m 1010	571	---	---
Calcium	ppm ASTM D5185m 1070	1565	---	---
Phosphorus	ppm ASTM D5185m 1150	939	---	---
Zinc	ppm ASTM D5185m 1270	1119	---	---
Sulfur	ppm ASTM D5185m 2060	3429	---	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	8	---	---
Sodium	ppm ASTM D5185m	<1	---	---
Potassium	ppm ASTM D5185m >20	0	---	---
Fuel	% ASTM D3524 >5	1.8	---	---




INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.1	---	---
Nitration	Abs/cm *ASTM D7624 >20	5.7	---	---
Sulfation	Abs/.1mm *ASTM D7415 >30	20.1	---	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	14.5	---	---
Base Number (BN)	mg KOH/g ASTM D2896 9.8	8.9	---	---









OIL ANALYSIS REPORT

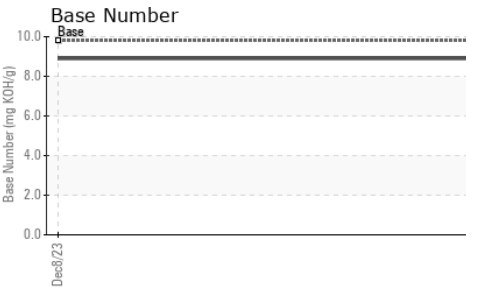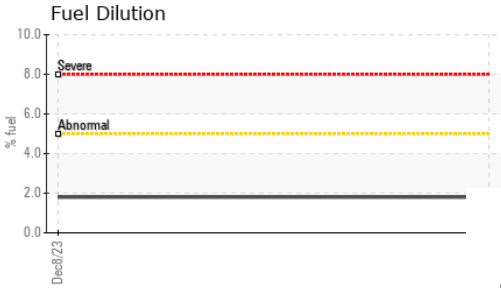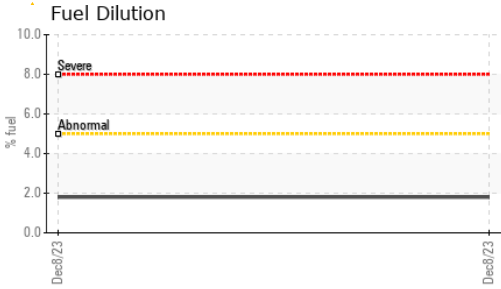

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4 ▲ 11.5	---	---

GRAPHS

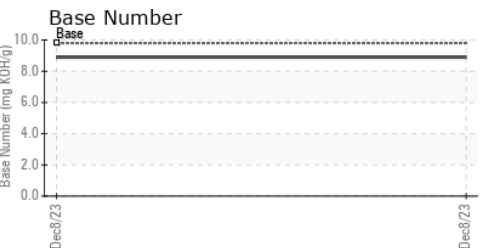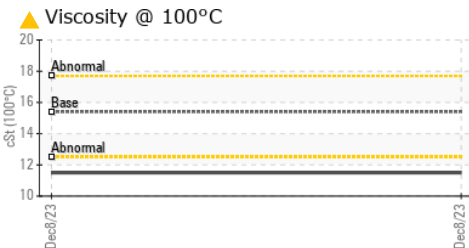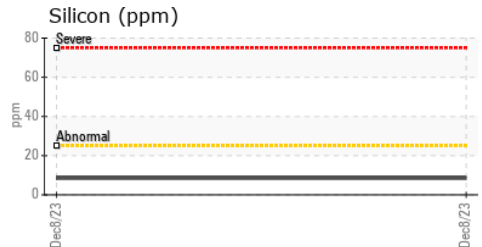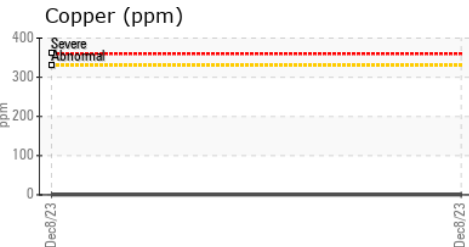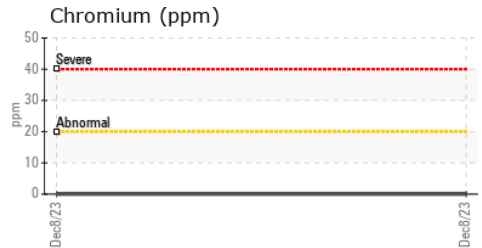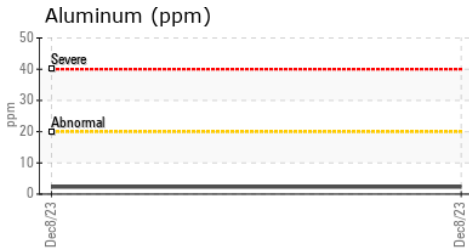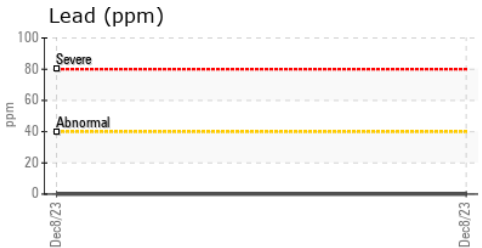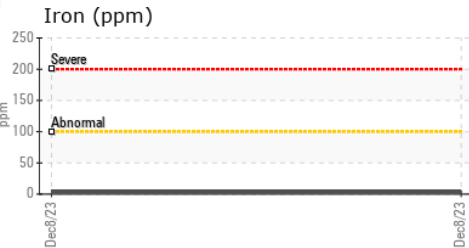

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0070674 **Recieved** : 02 Jan 2024
Lab Number : 06049345 **Diagnosed** : 04 Jan 2024
Unique Number : 10809953 **Diagnostician** : Angela Borella
Test Package : MOB 1 (Additional Tests: FuelDilution, PercentFuel, TBN)

Kemp Quarries - Pryor Stone - Pryor
 1050 E 520 Rd
 Pryor, OK
 US 74361
 Contact:
 pryor@pryorstone.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)