

## **OIL ANALYSIS REPORT**

#### Sample Rating Trend



## Machine Id 10892C

Component Natural Gas Engine

Fluid PETRO CANADA DURON GEO LD 15W40 (11 GAL)

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.


## Fluid Condition


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

I1 GAL)						
SAMPLE INFORI	MATION	method	s Aprzozo sepzozo Janżo limit/base	ozi May2ozi Sap2ozi Fab2ozz May2 e current	history1	history2
Sample Number		Client Info		GFL0069746	GFL0084243	GFL0069708
Sample Date		Client Info		28 Dec 2023	GFL0064243 21 Jun 2023	19 May 2023
Machine Age	hrs	Client Info		20 Dec 2023	4004	19 May 2023 3763
Oil Age	hrs	Client Info		5270 5270	4004	3763
Oil Changed	1115	Client Info		Changed	Changed	Changed
Sample Status		0		NORMAL	NORMAL	NORMAL
CONTAMINAT	ION	method	limit/base	e current	history1	history2
Water		WC Method	>0.1	NEG	NEG	NEG
WEAR METAL	S	method	limit/base	e current	history1	history2
Iron	ppm	ASTM D5185m	>50	11	20	8
Chromium	ppm	ASTM D5185m	>4	<1	2	<1
Nickel	ppm	ASTM D5185m	>2	<1	1	<1
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>9	2	4	0
Lead	ppm	ASTM D5185m	>30	3	<1	<1
Copper	ppm	ASTM D5185m	>35	<1	1	<1
Tin	ppm	ASTM D5185m	>4	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	e current	history1	history2
Boron	ppm	ASTM D5185m	50	6	28	17
Barium	ppm	ASTM D5185m	5	0	0	0
Molybdenum	ppm	ASTM D5185m	50	63	88	59
Manganese	ppm	ASTM D5185m	0	<1	<1	<1
Magnesium	ppm	ASTM D5185m	560	678	859	648
Calcium	ppm	ASTM D5185m	1510	1668	2135	1637
Phosphorus	ppm	ASTM D5185m	780	801	1173	827
Zinc	ppm	ASTM D5185m	870	1096	1407	1062
Sulfur	ppm	ASTM D5185m	2040	2561	4096	2906
CONTAMINAN	ITS	method	limit/base	e current	history1	history2
Silicon	ppm	ASTM D5185m	>+100	8	11	5
Sodium	ppm	ASTM D5185m		7	4	4
Potassium	ppm	ASTM D5185m	>20	0	2	2
INFRA-RED		method	limit/base	e current	history1	history2
Soot %	%	*ASTM D7844		0	0.1	0
Nitration	Abs/cm	*ASTM D7624	>20	11.3	8.3	9.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	24.3	20.1	20.1
FLUID DEGRAD	DATION	method	limit/base	e current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	19.4	16.7	16.1
Base Number (BN)	mg KOH/g	ASTM D2896	10.2	3.4	6.8	6.6
	0 0					




# **OIL ANALYSIS REPORT**





VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPE	RTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.1	14.1	13.9	14.0
GRAPHS						

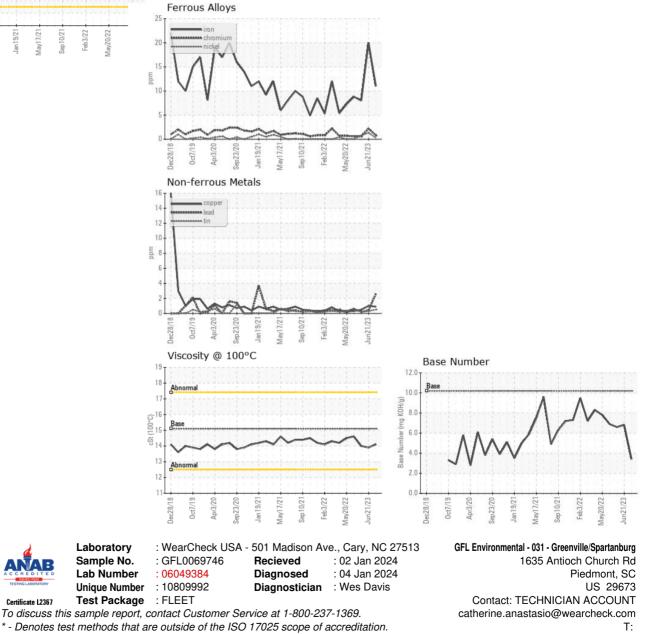

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

F: