



OIL ANALYSIS REPORT

Sample Rating Trend



VISUAL METAL



Machine Id
728051-361690

Component
Hydraulic System

Fluid
AW HYDRAULIC OIL ISO 46 (--- GAL)

DIAGNOSIS

▲ Recommendation

The filter change at the time of sampling has been noted. We advise that you inspect for possible wear. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

▲ Wear

Moderate concentration of visible metal present. All component wear rates are normal.

▲ Contamination

Moderate concentration of visible dirt/debris present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0065691	---	---
Sample Date	Client Info	15 Dec 2023	---	---
Machine Age	mls	Client Info	0	---
Oil Age	mls	Client Info	0	---
Oil Changed	Client Info	Not Changed	---	---
Sample Status		ABNORMAL	---	---

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	---

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>20	8	---
Chromium	ppm	ASTM D5185m	>10	<1	---
Nickel	ppm	ASTM D5185m	>10	0	---
Titanium	ppm	ASTM D5185m		0	---
Silver	ppm	ASTM D5185m		0	---
Aluminum	ppm	ASTM D5185m	>10	1	---
Lead	ppm	ASTM D5185m	>10	<1	---
Copper	ppm	ASTM D5185m	>75	9	---
Tin	ppm	ASTM D5185m	>10	<1	---
Vanadium	ppm	ASTM D5185m		0	---
Cadmium	ppm	ASTM D5185m		<1	---

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	5	0	---
Barium	ppm	ASTM D5185m	5	0	---
Molybdenum	ppm	ASTM D5185m	5	0	---
Manganese	ppm	ASTM D5185m		<1	---
Magnesium	ppm	ASTM D5185m	25	10	---
Calcium	ppm	ASTM D5185m	200	126	---
Phosphorus	ppm	ASTM D5185m	300	336	---
Zinc	ppm	ASTM D5185m	370	416	---
Sulfur	ppm	ASTM D5185m	2500	898	---

CONTAMINANTS



method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>20	5	---
Sodium	ppm	ASTM D5185m		4	---
Potassium	ppm	ASTM D5185m	>20	0	---

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	0.33	---



OIL ANALYSIS REPORT

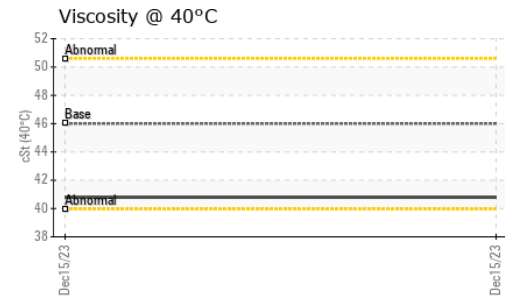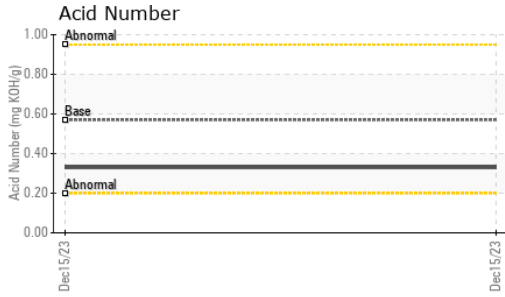





PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	▲ MODER	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	▲ MODER	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	40.8	---

SAMPLE IMAGES

method	limit/base	current	history1	history2
Color				
Bottom				

GRAPHS

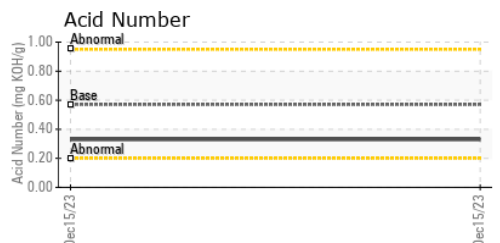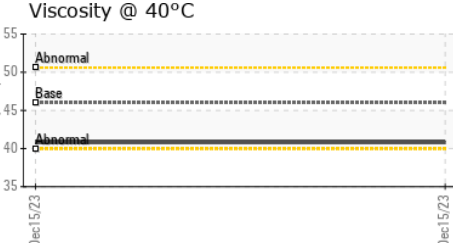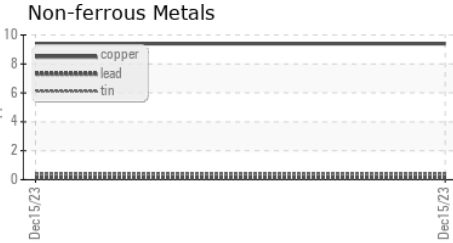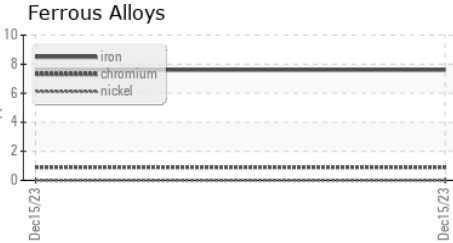

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0065691 Recieved : 02 Jan 2024
 Lab Number : 06049522 Diagnosed : 04 Jan 2024
 Unique Number : 10810130 Diagnostician : Jonathan Hester
 Test Package : FLEET (Additional Tests: PrtCount)

GFL Environmental - 823 - Central Missouri Hauling
 24461 Oak Grove Lane
 Sedalia, MO
 US 65301
 Contact: Terry Randolph
 trandolph@gflenv.com
 T: (660)631-2116
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)