


OIL ANALYSIS REPORT



KEMP QUARRIES / PRYOR STONE [67853] **WL137**

Component **Rear Differential**

PETRO CANADA PRODURO TO-4 SAE 50 (--- GAL)



Sample Rating Trend



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. (Customer Sample Comment: Pm2 performed. All oil samples taken. Engine oil, transmission oil, and all filters changed.)

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the


Fluid Condition

The condition of the oil is acceptable for the time in service.


RO TO-4 SAE 50	(GAL)	Apr2020	Nov2021 Jul2022	Feb2023 Jul2023	Dec2023	
SAMPLE INFOR	RMATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0084402	PCA0086228	PCA0084229
Sample Date		Client Info		16 Dec 2023	06 Oct 2023	28 Jul 2023
Machine Age	hrs	Client Info		32690	32269	31785
Oil Age	hrs	Client Info		905	484	2146
Oil Changed	1110	Client Info		Oil Added	Oil Added	Changed
Sample Status		Olione inio		NORMAL	NORMAL	NORMAL
CONTAMINA ⁻	TION	method	limit/base	current	history1	history2
Water		WC Method		NEG	NEG	NEG
WEAR METAI	LS	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>500	4	27	10
Chromium	ppm	ASTM D5185m		0	0	<1
Nickel	ppm	ASTM D5185m		0	0	0
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m		1	3	4
Lead		ASTM D5185m		0	<1	0
Copper	ppm	ASTM D5185m		0 <1	1	1
• •	ppm					
Tin 	ppm	ASTM D5185m	>5	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	0	1	0
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	<1	0
Manganese	ppm	ASTM D5185m	0	<1	<1	<1
Magnesium	ppm	ASTM D5185m	9	13	2	16
Calcium	ppm	ASTM D5185m	3114	3420	3749	3471
Phosphorus	ppm	ASTM D5185m	1099	916	1029	993
Zinc	ppm	ASTM D5185m	1245	1115	1377	1227
Sulfur	ppm	ASTM D5185m	7086	4265	5133	7674
CONTAMINA	NTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>100	10	22	15
Sodium	ppm	ASTM D5185m		1	<1	<1
Potassium	ppm	ASTM D5185m	>20	0	2	0
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
·01·24) Pov: 1	Juanal	visuai		ITLG	IVLU	Submitted D



OIL ANALYSIS REPORT

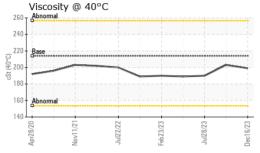



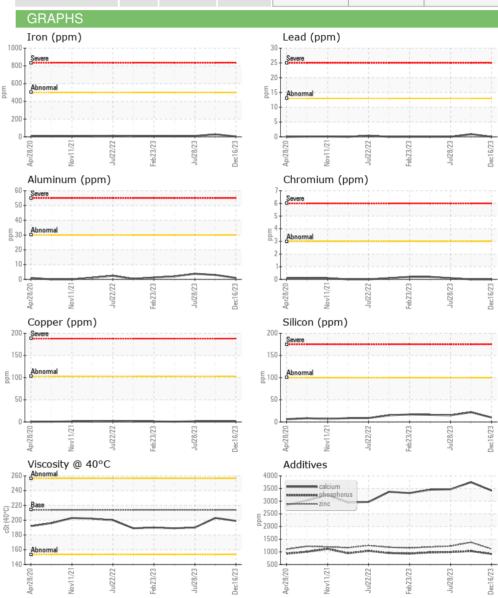





Certificate L2367

Laboratory Sample No. Lab Number **Unique Number** Test Package : MOB 1

: 06049667 : 10810275

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : PCA0084402

Diagnosed

Recieved : 02 Jan 2024 : 04 Jan 2024

: Sean Felton Diagnostician

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Kemp Quarries - Pryor Stone - Pryor

1050 E 520 Rd Pryor, OK US 74361

Contact: pryor@pryorstone.com

T:

F: