


OIL ANALYSIS REPORT

Sample Rating Trend



WEAR

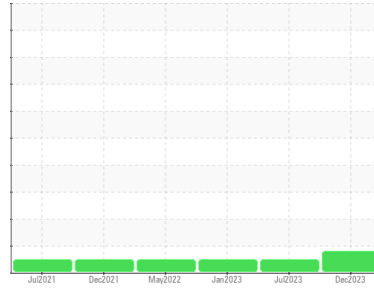

Machine Id
T323
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (--- QTS)

DIAGNOSIS

▲ Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

▲ Wear

An increase in the copper level is noted. All other component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PCA0114724	PCA0098187	PCA0087423
Sample Date	Client Info	21 Dec 2023	05 Jul 2023	09 Jan 2023
Machine Age	mls Client Info	253992	228416	201103
Oil Age	mls Client Info	253992	0	0
Oil Changed	Client Info	Changed	Changed	Changed
Sample Status		ATTENTION	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	25	20	19
Chromium	ppm ASTM D5185m >20	2	1	<1
Nickel	ppm ASTM D5185m >4	<1	<1	0
Titanium	ppm ASTM D5185m	0	<1	<1
Silver	ppm ASTM D5185m >3	0	0	0
Aluminum	ppm ASTM D5185m >20	3	3	3
Lead	ppm ASTM D5185m >40	0	<1	0
Copper	ppm ASTM D5185m >330	▲ 152	2	2
Tin	ppm ASTM D5185m >15	<1	0	0
Vanadium	ppm ASTM D5185m	<1	<1	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 2	4	0	0
Barium	ppm ASTM D5185m 0	0	0	0
Molybdenum	ppm ASTM D5185m 50	63	63	58
Manganese	ppm ASTM D5185m 0	<1	<1	<1
Magnesium	ppm ASTM D5185m 950	897	931	779
Calcium	ppm ASTM D5185m 1050	1052	1134	1014
Phosphorus	ppm ASTM D5185m 995	942	925	772
Zinc	ppm ASTM D5185m 1180	1194	1196	981
Sulfur	ppm ASTM D5185m 2600	2382	3206	2694

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	9	10	8
Sodium	ppm ASTM D5185m	3	3	1
Potassium	ppm ASTM D5185m >20	9	9	6

INFRA-RED


method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	1.3	0.9	1.7
Nitration	Abs/cm *ASTM D7624 >20	9.1	10.1	10.4
Sulfation	Abs/.1mm *ASTM D7415 >30	21.1	22.5	23.2

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	15.4	17.1	16.6
Base Number (BN)	mg KOH/g ASTM D2896	6.4	5.9	6.1


OIL ANALYSIS REPORT

▲ Non-ferrous Metals

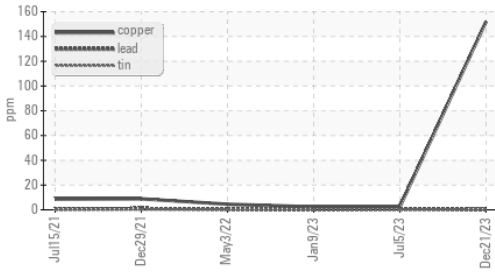

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


Base Number

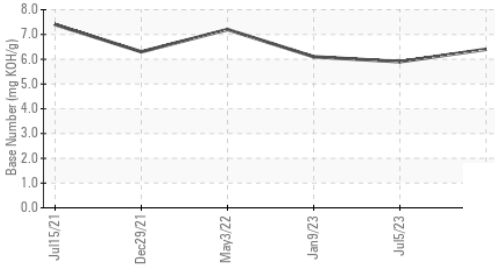


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	11.4	11.5

GRAPHS


Ferrous Alloys

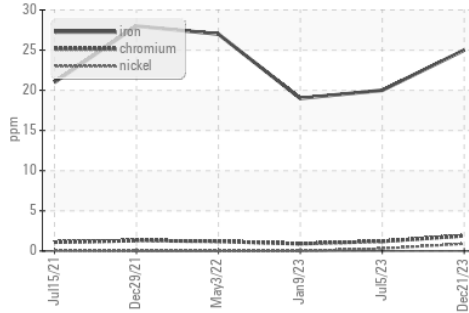


Viscosity @ 100°C

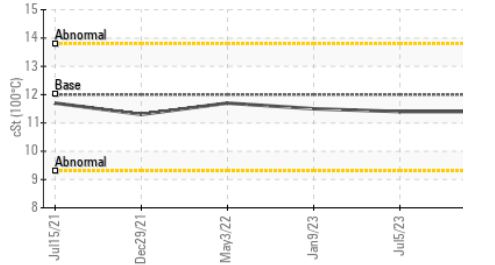


▲ Non-ferrous Metals

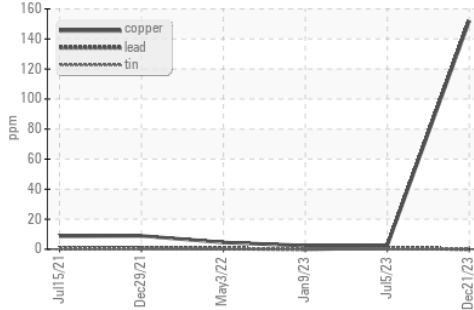

Viscosity @ 100°C

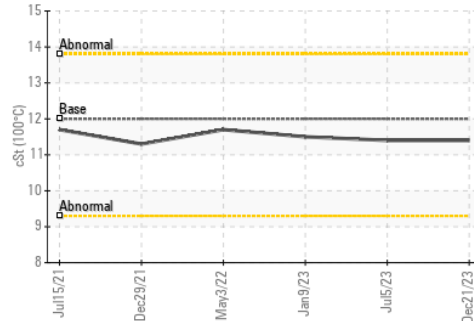

Base Number

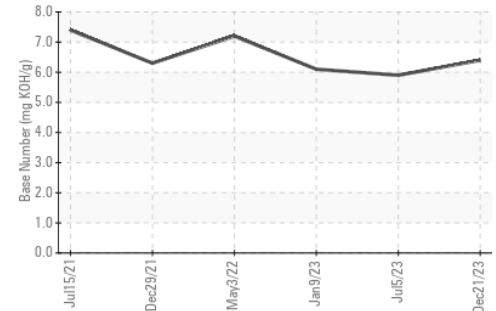

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0114724 **Received** : 03 Jan 2024
Lab Number : 06049737 **Diagnosed** : 04 Jan 2024
Unique Number : 10810345 **Diagnostician** : Don Baldrige
Test Package : FLEET

NW WHITE & CO - COLUMBIA DIVISION
 100 INDEPENDENCE BLVD
 COLUMBIA, SC
 US 29210
 Contact: GEORGE EDWARDS
 gedwards@nwwhite.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: