




# PROBLEM SUMMARY



Machine Id  
**174M**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

Sample Rating Trend

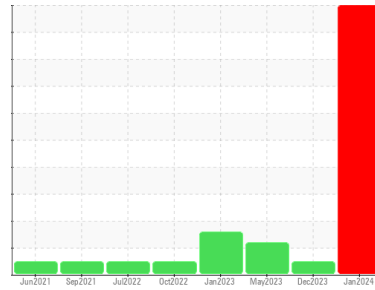


GLYCOL




## COMPONENT CONDITION SUMMARY

### Glycol Contamination

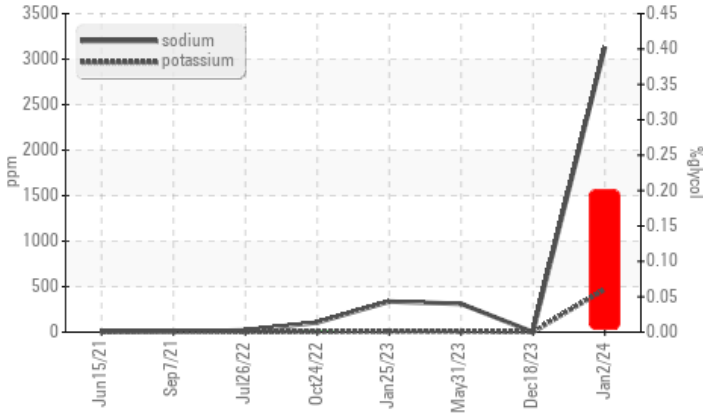

### Silicon (ppm)

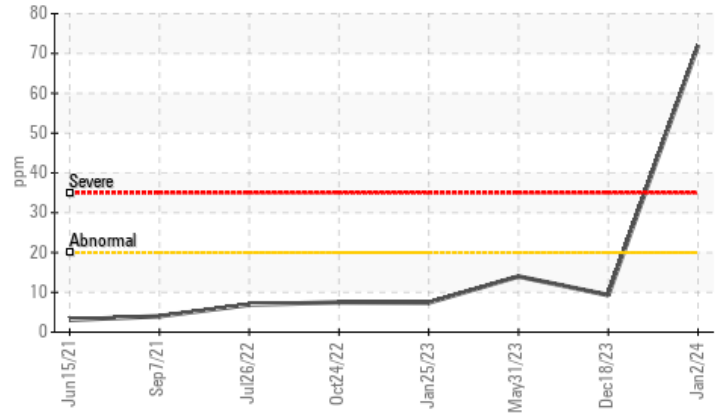

## RECOMMENDATION

We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

## PROBLEMATIC TEST RESULTS

| Sample Status |     |                 | SEVERE | NORMAL | ABNORMAL |
|---------------|-----|-----------------|--------|--------|----------|
| Silicon       | ppm | ASTM D5185m >20 | 72     | 9      | 14       |
| Sodium        | ppm | ASTM D5185m     | 3130   | 0      | 311      |
| Potassium     | ppm | ASTM D5185m >20 | 470    | 1      | 6        |
| Glycol        | %   | *ASTM D2982     | 0.20   | NEG    | NEG      |

Customer Id: GFL415  
Sample No.: GFL0108816  
Lab Number: 06050583  
Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:  
Jonathan Hester +1 919-379-4092 x4092  
[jhester@wearcheckusa.com](mailto:jhester@wearcheckusa.com)

To change component or sample information:  
Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

| Action              | Status | Date | Done By | Description   |
|---------------------|--------|------|---------|---|
| Change Fluid        | ---    | ---  | ?       | Oil and filter change at the time of sampling has been noted. |
| Change Filter       | ---    | ---  | ?       | Oil and filter change at the time of sampling has been noted. |
| Resample            | ---    | ---  | ?       | We recommend an early resample to monitor this condition.     |
| Check Glycol Access | ---    | ---  | ?       | We advise that you check for the source of the coolant leak.  |

## HISTORICAL DIAGNOSIS

18 Dec 2023 Diag: Sean Felton

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



31 May 2023 Diag: Don Baldrige

GLYCOL



We advise that you check for possible coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. All component wear rates are normal. Sodium and/or potassium levels are high. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

view report



25 Jan 2023 Diag: Jonathan Hester

GLYCOL



We advise that you check for possible coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. All component wear rates are normal. Sodium and/or potassium levels are high. Fuel content negligible. The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.


view report





# OIL ANALYSIS REPORT

Sample Rating Trend

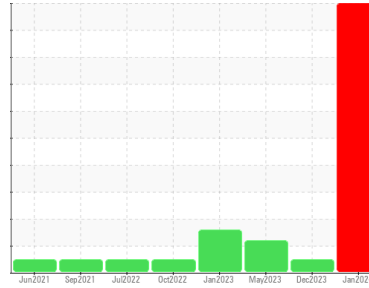

GLYCOL



Machine Id  
**174M**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

Sodium and/or potassium levels are high. There is a high concentration of glycol present in the oil. Elemental level of silicon (Si) above normal indicating ingress of seal material.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2    |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>GFL0108816</b>  | GFL0105732  | GFL0081430  |
| Sample Date   | Client Info |             | <b>02 Jan 2024</b> | 18 Dec 2023 | 31 May 2023 |
| Machine Age   | hrs         | Client Info | <b>20846</b>       | 20160       | 19750       |
| Oil Age       | hrs         | Client Info | <b>19750</b>       | 19750       | 19143       |
| Oil Changed   | Client Info |             | <b>Changed</b>     | Not Changd  | Changed     |
| Sample Status |             |             | <b>SEVERE</b>      | NORMAL      | ABNORMAL    |

## CONTAMINATION

|       | method    | limit/base | current        | history1 | history2 |
|-------|-----------|------------|----------------|----------|----------|
| Fuel  | WC Method | >5         | <b>&lt;1.0</b> | <1.0     | <1.0     |
| Water | WC Method | >0.2       | <b>NEG</b>     | NEG      | NEG      |

## WEAR METALS

|          | method | limit/base       | current      | history1 | history2 |
|----------|--------|------------------|--------------|----------|----------|
| Iron     | ppm    | ASTM D5185m >80  | <b>81</b>    | 4        | 23       |
| Chromium | ppm    | ASTM D5185m >5   | <b>6</b>     | <1       | 2        |
| Nickel   | ppm    | ASTM D5185m >2   | <b>&lt;1</b> | <1       | 0        |
| Titanium | ppm    | ASTM D5185m      | <b>&lt;1</b> | 0        | 0        |
| Silver   | ppm    | ASTM D5185m >3   | <b>0</b>     | 0        | 0        |
| Aluminum | ppm    | ASTM D5185m >30  | <b>10</b>    | 2        | 5        |
| Lead     | ppm    | ASTM D5185m >30  | <b>1</b>     | 0        | 0        |
| Copper   | ppm    | ASTM D5185m >150 | <b>11</b>    | 12       | 7        |
| Tin      | ppm    | ASTM D5185m >5   | <b>2</b>     | 0        | 0        |
| Vanadium | ppm    | ASTM D5185m      | <b>&lt;1</b> | 0        | 0        |
| Cadmium  | ppm    | ASTM D5185m      | <b>&lt;1</b> | 0        | 0        |

## ADDITIVES

|            | method | limit/base       | current      | history1 | history2 |
|------------|--------|------------------|--------------|----------|----------|
| Boron      | ppm    | ASTM D5185m 0    | <b>78</b>    | 18       | 6        |
| Barium     | ppm    | ASTM D5185m 0    | <b>&lt;1</b> | 0        | 0        |
| Molybdenum | ppm    | ASTM D5185m 60   | <b>232</b>   | 60       | 71       |
| Manganese  | ppm    | ASTM D5185m 0    | <b>1</b>     | 0        | <1       |
| Magnesium  | ppm    | ASTM D5185m 1010 | <b>812</b>   | 863      | 951      |
| Calcium    | ppm    | ASTM D5185m 1070 | <b>1034</b>  | 970      | 1033     |
| Phosphorus | ppm    | ASTM D5185m 1150 | <b>955</b>   | 821      | 999      |
| Zinc       | ppm    | ASTM D5185m 1270 | <b>1120</b>  | 1097     | 1264     |
| Sulfur     | ppm    | ASTM D5185m 2060 | <b>2898</b>  | 2848     | 3503     |

## CONTAMINANTS

|           | method | limit/base      | current     | history1 | history2 |
|-----------|--------|-----------------|-------------|----------|----------|
| Silicon   | ppm    | ASTM D5185m >20 | <b>72</b>   | 9        | 14       |
| Sodium    | ppm    | ASTM D5185m     | <b>3130</b> | 0        | 311      |
| Potassium | ppm    | ASTM D5185m >20 | <b>470</b>  | 1        | 6        |
| Glycol    | %      | *ASTM D2982     | <b>0.20</b> | NEG      | NEG      |

## INFRA-RED

|           | method   | limit/base      | current     | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot %    | %        | *ASTM D7844 >3  | <b>0.5</b>  | 0.1      | 0.6      |
| Nitration | Abs/cm   | *ASTM D7624 >20 | <b>12.7</b> | 4.5      | 8.0      |
| Sulfation | Abs/.1mm | *ASTM D7415 >30 | <b>23.9</b> | 17.8     | 20.6     |


## FLUID DEGRADATION

|                  | method   | limit/base      | current     | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Oxidation        | Abs/.1mm | *ASTM D7414 >25 | <b>15.5</b> | 13.3     | 15.3     |
| Base Number (BN) | mg KOH/g | ASTM D2896 9.8  | <b>23.2</b> | 9.2      | 8.0      |




# OIL ANALYSIS REPORT


### Glycol Contamination

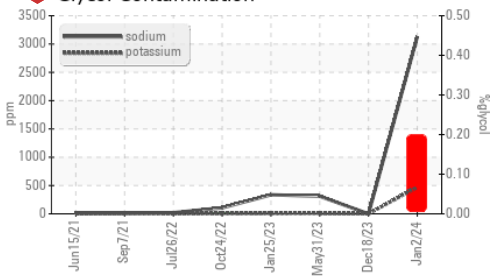


### Silicon (ppm)

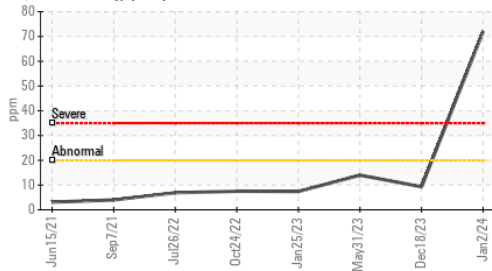

### Base Number

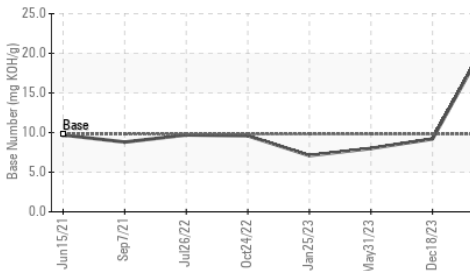

### Viscosity @ 100°C

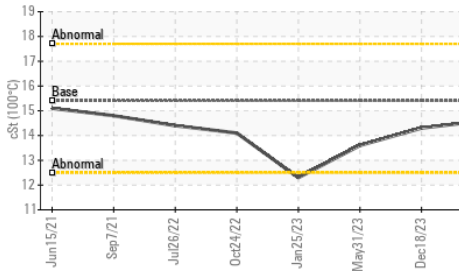

### VISUAL


| Property         | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |

### FLUID PROPERTIES


| Property     | method | limit/base | current | history1 | history2 |
|--------------|--------|------------|---------|----------|----------|
| Visc @ 100°C | cSt    | ASTM D445  | 15.4    | 14.6     | 14.3     |

### GRAPHS


#### Ferrous Alloys

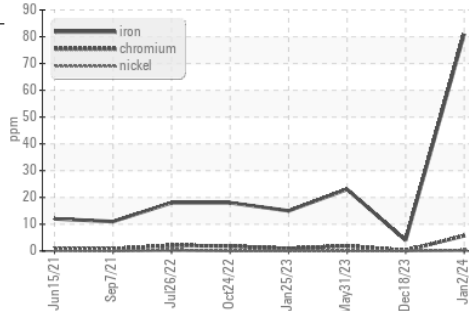


#### Non-ferrous Metals

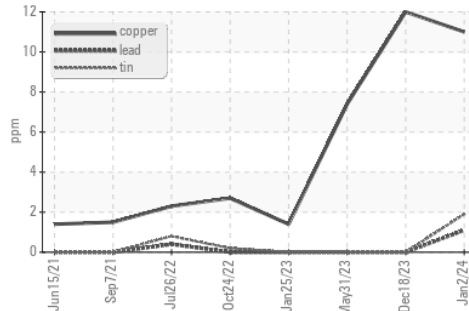

#### Viscosity @ 100°C

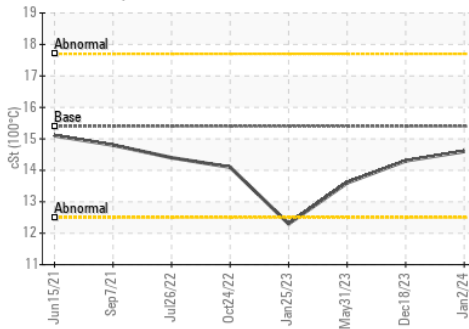

#### Base Number

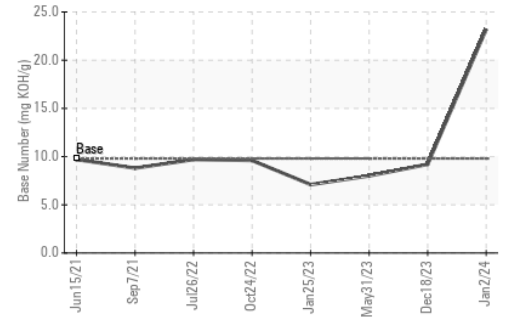

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0108816 **Received** : 04 Jan 2024  
**Lab Number** : 06050583 **Diagnosed** : 05 Jan 2024  
**Unique Number** : 10816532 **Diagnostician** : Jonathan Hester  
**Test Package** : FLEET ( Additional Tests: Glycol )

**GFL Environmental - 415 - Michigan East**  
 6200 Elmridge  
 Sterling Heights, MI  
 US 48313  
 Contact: Frank Wolak  
 fwolak@gflenv.com  
 T: (586)825-9514  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)