


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

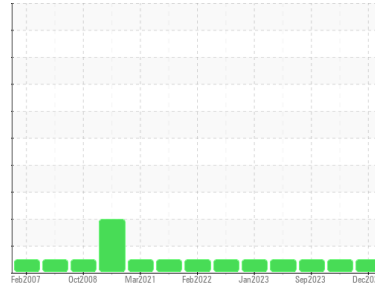

Area  
**Grinding Room**  
 Machine Id  
**PUMPS 6 & 7 BARRELLIFT**  
 Component  
**Hydraulic System**  
 Fluid  
**MOBIL DTE 25 (60 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PCA0113540</b>	PCA0103583	PCA0099632
Sample Date	Client Info	<b>29 Dec 2023</b>	25 Sep 2023	08 Sep 2023
Machine Age	hrs Client Info	<b>0</b>	0	0
Oil Age	hrs Client Info	<b>0</b>	0	0
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.05	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >20	<b>10</b>	10	8
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	0	0
Nickel	ppm ASTM D5185m >20	<b>&lt;1</b>	0	0
Titanium	ppm ASTM D5185m	<b>&lt;1</b>	0	0
Silver	ppm ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>2</b>	0	<1
Lead	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Copper	ppm ASTM D5185m >20	<b>19</b>	18	6
Tin	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	0
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	<b>0</b>	0	0
Barium	ppm ASTM D5185m	<b>10</b>	0	0
Molybdenum	ppm ASTM D5185m	<b>2</b>	2	2
Manganese	ppm ASTM D5185m	<b>0</b>	<1	0
Magnesium	ppm ASTM D5185m	<b>&lt;1</b>	<1	1
Calcium	ppm ASTM D5185m	<b>78</b>	75	79
Phosphorus	ppm ASTM D5185m	<b>411</b>	342	345
Zinc	ppm ASTM D5185m	<b>527</b>	527	531
Sulfur	ppm ASTM D5185m	<b>1669</b>	1630	1844

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Sodium	ppm ASTM D5185m	<b>3</b>	6	3
Potassium	ppm ASTM D5185m >20	<b>10</b>	10	2





## FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >10000	<b>645</b>	1347	792
Particles >6µm	ASTM D7647 >2500	<b>187</b>	239	187
Particles >14µm	ASTM D7647 >640	<b>17</b>	12	19
Particles >21µm	ASTM D7647 >160	<b>4</b>	3	6
Particles >38µm	ASTM D7647 >40	<b>1</b>	0	0
Particles >71µm	ASTM D7647 >10	<b>1</b>	0	0
Oil Cleanliness	ISO 4406 (c) >20/18/16	<b>17/15/11</b>	18/15/11	17/15/11

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D8045	<b>0.56</b>	0.615	0.75


# OIL ANALYSIS REPORT

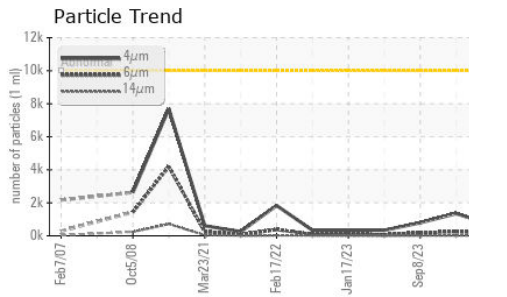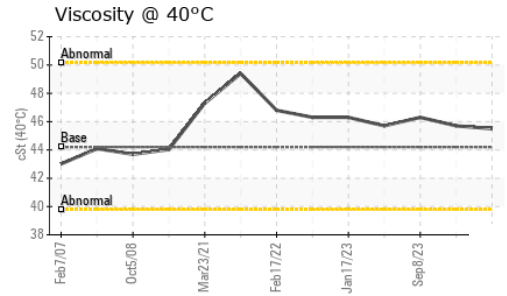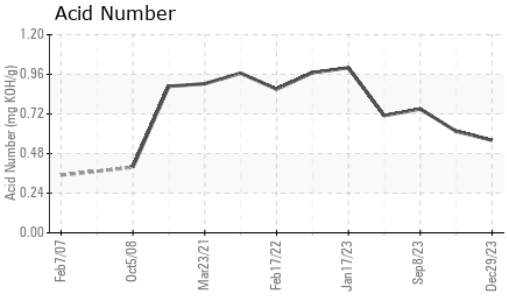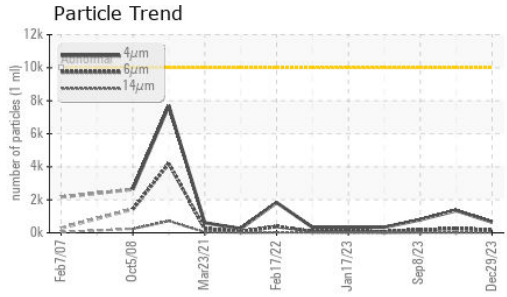






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	44.2	45.5	45.7

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

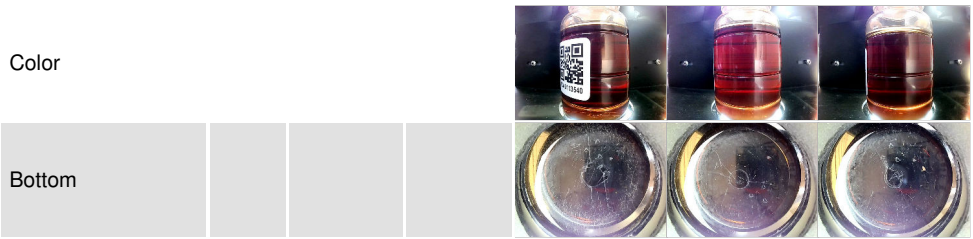

## GRAPHS

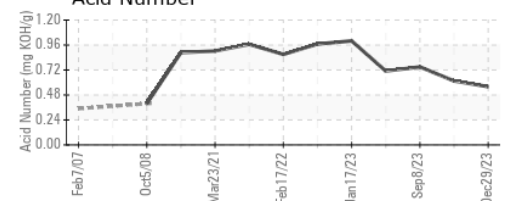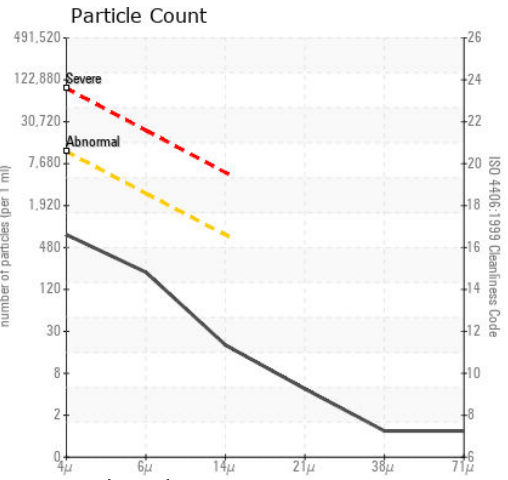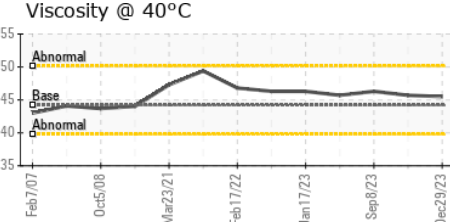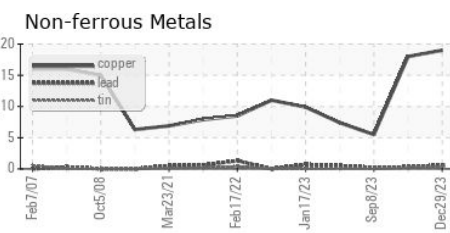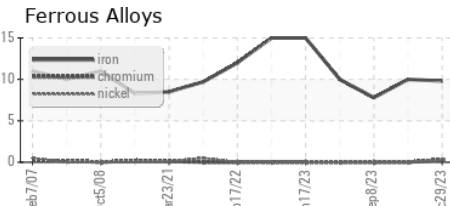

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0113540 **Received** : 04 Jan 2024  
**Lab Number** : 06050826 **Diagnosed** : 05 Jan 2024  
**Unique Number** : 10816775 **Diagnostician** : Don Baldrige  
**Test Package** : IND 2

**KraftHeinz - New Ulm - Plant 8302**  
 2525 S BRIDGE STREET  
 NEW ULM, MN  
 US 56073  
 Contact: RYAN SCHMID  
 ryan.schmid@kraftheinz.com  
 T: (507)568-0338  
 F: (507)354-7927

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)