




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
{UNASSIGNED}
 Machine Id
322002-880
 Component
Gasoline Engine
 Fluid
5W20 (--- GAL)

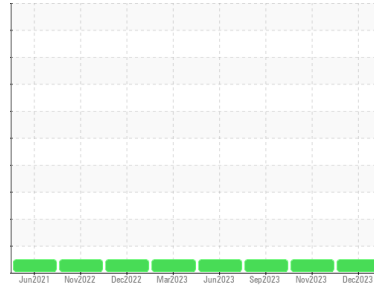

DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor. (Customer Sample Comment: Serviced)

Wear
 All component wear rates are normal.

Contamination
 There is no indication of any contamination in the oil.

Fluid Condition
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0094872	GFL0094855	GFL0088284
Sample Date	Client Info		28 Dec 2023	06 Nov 2023	11 Sep 2023
Machine Age	mls Client Info		246852	244523	242223
Oil Age	mls Client Info		7898	5569	3269
Oil Changed	Client Info		Changed	Not Changd	Not Changd
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m	>150	38	29	22
Chromium	ppm ASTM D5185m	>20	3	2	2
Nickel	ppm ASTM D5185m	>5	<1	<1	<1
Titanium	ppm ASTM D5185m		0	0	0
Silver	ppm ASTM D5185m	>2	0	0	0
Aluminum	ppm ASTM D5185m	>40	6	4	2
Lead	ppm ASTM D5185m	>50	0	0	<1
Copper	ppm ASTM D5185m	>155	1	<1	<1
Tin	ppm ASTM D5185m	>10	<1	0	<1
Vanadium	ppm ASTM D5185m		0	0	0
Cadmium	ppm ASTM D5185m		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m		22	21	38
Barium	ppm ASTM D5185m		0	<1	0
Molybdenum	ppm ASTM D5185m		57	59	62
Manganese	ppm ASTM D5185m		2	<1	1
Magnesium	ppm ASTM D5185m		448	424	477
Calcium	ppm ASTM D5185m		812	799	851
Phosphorus	ppm ASTM D5185m		507	477	603
Zinc	ppm ASTM D5185m		585	580	624
Sulfur	ppm ASTM D5185m		2095	2327	2833

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m	>30	15	14	14
Sodium	ppm ASTM D5185m	>400	5	<1	2
Potassium	ppm ASTM D5185m	>20	<1	2	2

INFRA-RED



	method	limit/base	current	history1	history2
Soot %	% *ASTM D7844		0.1	0	0.1
Nitration	Abs/cm *ASTM D7624	>20	14.5	12.5	10.0
Sulfation	Abs/.1mm *ASTM D7415	>30	25.7	23.3	19.3

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414	>25	23.4	18.5	13.5
Base Number (BN)	mg KOH/g ASTM D2896		3.0	3.2	3.9







OIL ANALYSIS REPORT

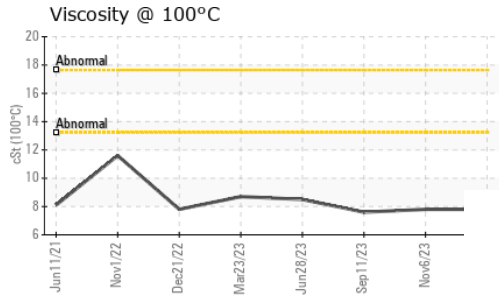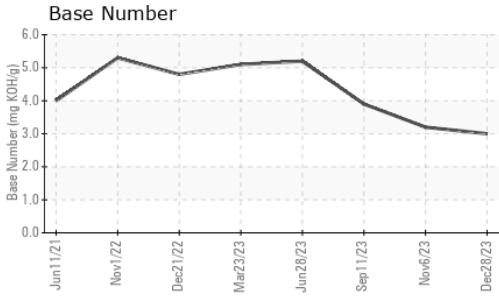

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	7.8	7.8	7.6

GRAPHS

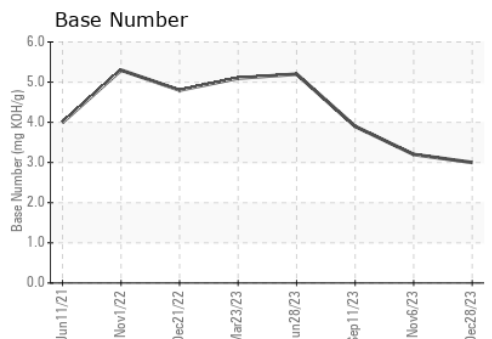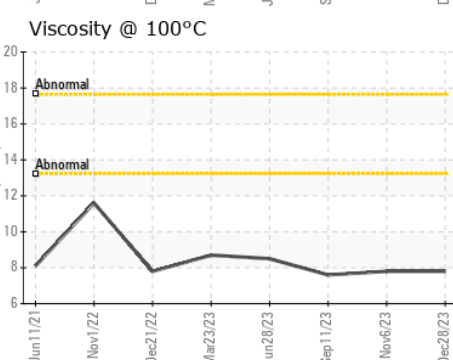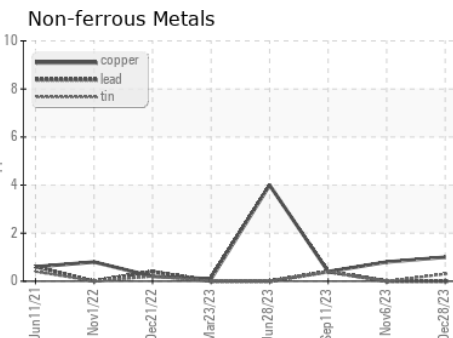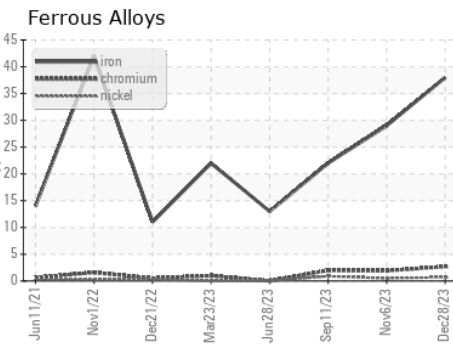

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0094872 **Received** : 04 Jan 2024
Lab Number : **06051322** **Diagnosed** : 08 Jan 2024
Unique Number : 10817271 **Diagnostician** : Jonathan Hester
Test Package : FLEET

GFL Environmental - 625 - Harrison Hauling
 4102 Industrial Pkwy
 Harrison, MI
 US 48625
 Contact: Glenda Standen
 gstanden@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)