




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**211007**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

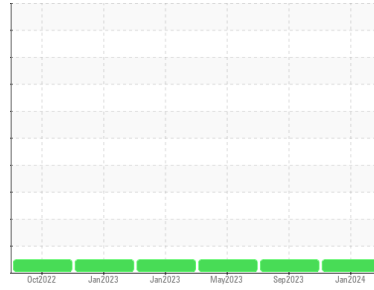

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0092588</b>	GFL0092574	GFL0081534
Sample Date	Client Info		<b>03 Jan 2024</b>	13 Sep 2023	24 May 2023
Machine Age	hrs	Client Info	<b>4395</b>	3654	2890
Oil Age	hrs	Client Info	<b>600</b>	600	600
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	<b>11</b>	3	14
Chromium	ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	2
Nickel	ppm	ASTM D5185m >2	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >30	<b>4</b>	1	6
Lead	ppm	ASTM D5185m >30	<b>4</b>	<1	<1
Copper	ppm	ASTM D5185m >150	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185m >5	<b>&lt;1</b>	1	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>4</b>	3	2
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>62</b>	61	60
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>902</b>	973	956
Calcium	ppm	ASTM D5185m 1070	<b>1125</b>	1201	1089
Phosphorus	ppm	ASTM D5185m 1150	<b>1040</b>	1077	1035
Zinc	ppm	ASTM D5185m 1270	<b>1283</b>	1290	1314
Sulfur	ppm	ASTM D5185m 2060	<b>3008</b>	3832	3807

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>4</b>	5	3
Sodium	ppm	ASTM D5185m	<b>4</b>	2	4
Potassium	ppm	ASTM D5185m >20	<b>7</b>	3	19

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.5</b>	0.1	1
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.6</b>	5.7	8.9
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.8</b>	17.6	21.2

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.5</b>	13.1	16.3
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.6</b>	8.5	8.4







# OIL ANALYSIS REPORT

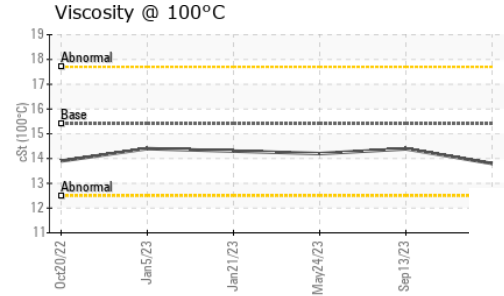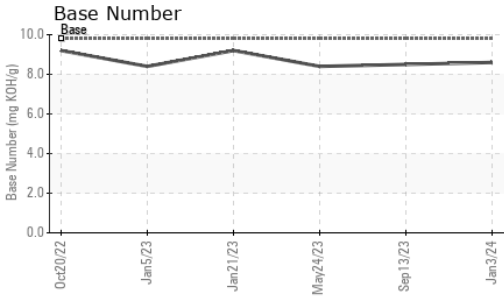

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.8</b>	14.39	14.2

## GRAPHS

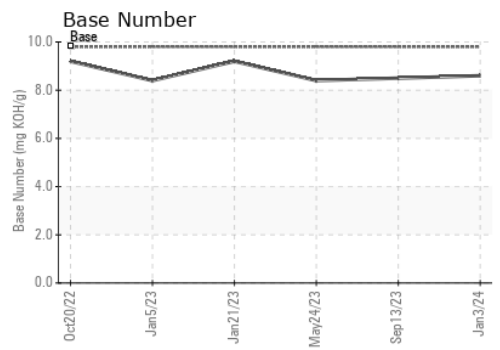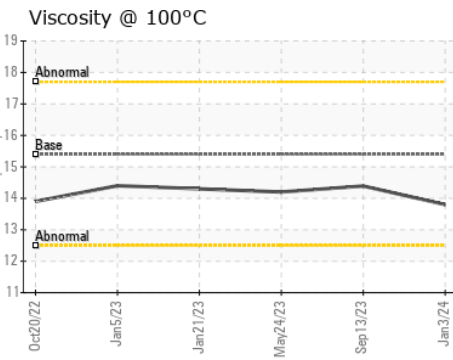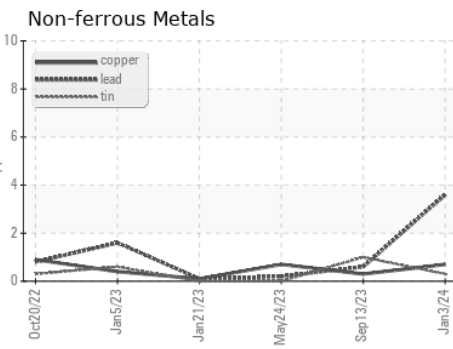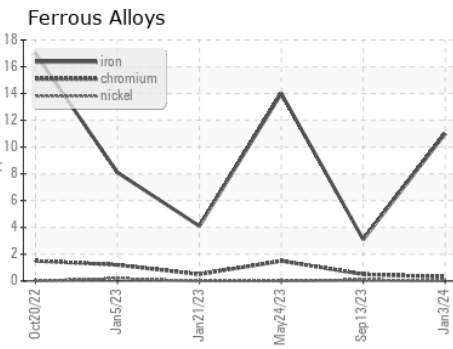

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0092588 **Received** : 04 Jan 2024  
**Lab Number** : **06051380** **Diagnosed** : 05 Jan 2024  
**Unique Number** : 10817329 **Diagnostician** : Don Baldrige  
**Test Package** : FLEET

**GFL Environmental - 885 - Orlando**  
 1263 W Landstreet Rd  
 Orlando, FL  
 US 32824  
 Contact: Brian Bou Diaz  
 bboudiaz@gflenv.com  
 T:  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)