




# OIL ANALYSIS REPORT

Sample Rating Trend

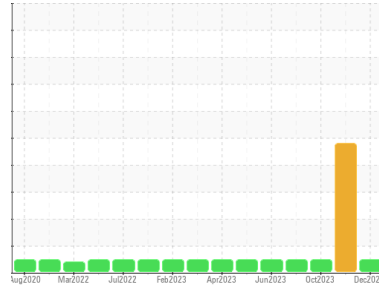

**NORMAL**



Machine Id  
**828022-1193**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0103818</b>	GFL0103820	GFL0097377
Sample Date	Client Info		<b>29 Dec 2023</b>	19 Dec 2023	16 Oct 2023
Machine Age	hrs	Client Info	<b>2475</b>	1882	72607
Oil Age	hrs	Client Info	<b>593</b>	175	72607
Oil Changed	Client Info		<b>N/A</b>	Changed	N/A
Sample Status			<b>NORMAL</b>	ABNORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	<b>18</b>	▲ 109	13
Chromium	ppm	ASTM D5185m >5	<b>&lt;1</b>	▲ 3	<1
Nickel	ppm	ASTM D5185m >2	<b>0</b>	▲ 1	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >30	<b>3</b>	▲ 12	4
Lead	ppm	ASTM D5185m >30	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m >150	<b>&lt;1</b>	2	4
Tin	ppm	ASTM D5185m >5	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>7</b>	7	3
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>57</b>	53	63
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m 1010	<b>899</b>	844	961
Calcium	ppm	ASTM D5185m 1070	<b>1041</b>	1086	1102
Phosphorus	ppm	ASTM D5185m 1150	<b>1021</b>	908	987
Zinc	ppm	ASTM D5185m 1270	<b>1221</b>	1145	1286
Sulfur	ppm	ASTM D5185m 2060	<b>3064</b>	2726	3312

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>7</b>	▲ 22	9
Sodium	ppm	ASTM D5185m	<b>2</b>	4	4
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	2	6

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.1</b>	0.2	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>5.2</b>	7.0	8.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>17.3</b>	18.1	18.3

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.2</b>	14.6	14.9
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>9.3</b>	8.3	7.9







# OIL ANALYSIS REPORT

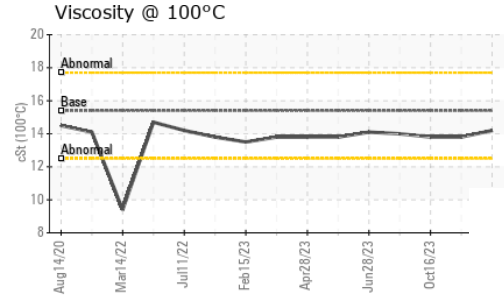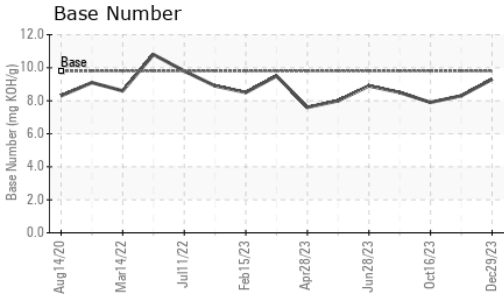

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.2</b>	13.8	13.8

## GRAPHS

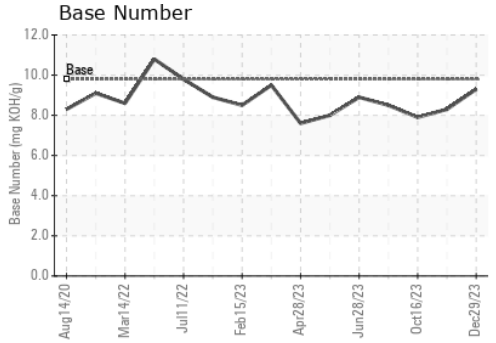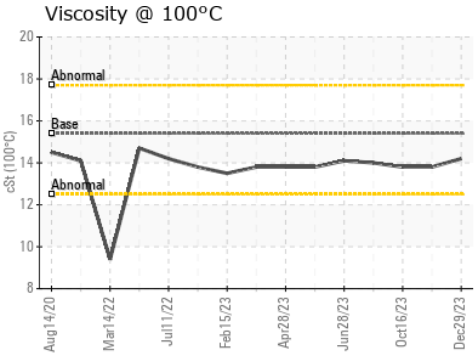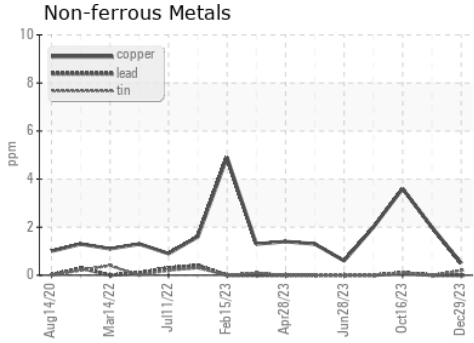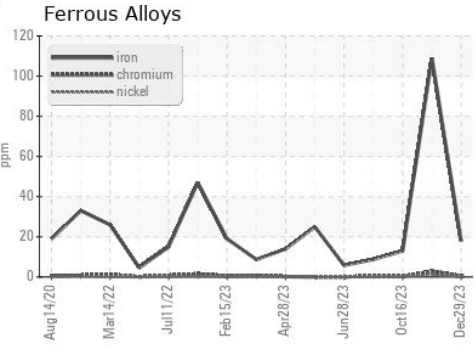

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0103818 **Received** : 04 Jan 2024  
**Lab Number** : 06051399 **Diagnosed** : 05 Jan 2024  
**Unique Number** : 10817348 **Diagnostician** : Don Baldrige  
**Test Package** : FLEET

**GFL Environmental - 654S - Midlothian**  
 12230 Deergrove Road  
 Midlothian, VA  
 US 23112  
 Contact: Corbin Umphlet  
 cumphlet@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)