




# OIL ANALYSIS REPORT

Sample Rating Trend

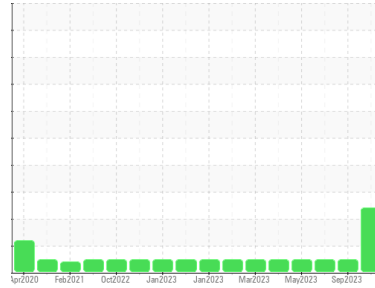

**DIRT**



Machine Id  
**420026-402479**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

The chromium level is marginal.

### Contamination

Elemental level of silicon (Si) above normal indicating ingress of seal material.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

| method        | limit/base  | current            | history1    | history2    |
|---------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | <b>GFL0100546</b>  | GFL0093262  | GFL0084599  |
| Sample Date   | Client Info | <b>29 Dec 2023</b> | 26 Sep 2023 | 28 Jun 2023 |
| Machine Age   | hrs         | <b>10948</b>       | 184857      | 0           |
| Oil Age       | hrs         | <b>0</b>           | 184857      | 0           |
| Oil Changed   | Client Info | <b>Changed</b>     | Changed     | Changed     |
| Sample Status |             | <b>ABNORMAL</b>    | NORMAL      | NORMAL      |

## CONTAMINATION

| method | limit/base     | current        | history1 | history2 |
|--------|----------------|----------------|----------|----------|
| Fuel   | WC Method >5   | <b>&lt;1.0</b> | <1.0     | <1.0     |
| Water  | WC Method >0.2 | <b>NEG</b>     | NEG      | NEG      |
| Glycol | WC Method      | <b>NEG</b>     | NEG      | NEG      |

## WEAR METALS

| method   | limit/base           | current      | history1 | history2 |
|----------|----------------------|--------------|----------|----------|
| Iron     | ppm ASTM D5185m >100 | <b>47</b>    | 3        | 7        |
| Chromium | ppm ASTM D5185m >20  | <b>▲ 17</b>  | <1       | <1       |
| Nickel   | ppm ASTM D5185m >4   | <b>0</b>     | 0        | <1       |
| Titanium | ppm ASTM D5185m      | <b>0</b>     | 0        | 0        |
| Silver   | ppm ASTM D5185m >3   | <b>0</b>     | 0        | 0        |
| Aluminum | ppm ASTM D5185m >20  | <b>6</b>     | <1       | 2        |
| Lead     | ppm ASTM D5185m >40  | <b>0</b>     | 0        | 0        |
| Copper   | ppm ASTM D5185m >330 | <b>&lt;1</b> | <1       | 0        |
| Tin      | ppm ASTM D5185m >15  | <b>0</b>     | 0        | <1       |
| Vanadium | ppm ASTM D5185m      | <b>0</b>     | <1       | 0        |
| Cadmium  | ppm ASTM D5185m      | <b>0</b>     | 0        | 0        |

## ADDITIVES

| method     | limit/base           | current      | history1 | history2 |
|------------|----------------------|--------------|----------|----------|
| Boron      | ppm ASTM D5185m 0    | <b>2</b>     | 0        | 1        |
| Barium     | ppm ASTM D5185m 0    | <b>0</b>     | 0        | 0        |
| Molybdenum | ppm ASTM D5185m 60   | <b>59</b>    | 64       | 67       |
| Manganese  | ppm ASTM D5185m 0    | <b>&lt;1</b> | <1       | <1       |
| Magnesium  | ppm ASTM D5185m 1010 | <b>1000</b>  | 1080     | 1084     |
| Calcium    | ppm ASTM D5185m 1070 | <b>1113</b>  | 1150     | 1204     |
| Phosphorus | ppm ASTM D5185m 1150 | <b>1023</b>  | 1086     | 1170     |
| Zinc       | ppm ASTM D5185m 1270 | <b>1289</b>  | 1353     | 1417     |
| Sulfur     | ppm ASTM D5185m 2060 | <b>3121</b>  | 3175     | 4121     |

## CONTAMINANTS

| method    | limit/base          | current     | history1 | history2 |
|-----------|---------------------|-------------|----------|----------|
| Silicon   | ppm ASTM D5185m >25 | <b>▲ 35</b> | 2        | 3        |
| Sodium    | ppm ASTM D5185m     | <b>4</b>    | 5        | 4        |
| Potassium | ppm ASTM D5185m >20 | <b>7</b>    | 4        | 7        |

## INFRA-RED

| method    | limit/base               | current     | history1 | history2 |
|-----------|--------------------------|-------------|----------|----------|
| Soot %    | % *ASTM D7844 >3         | <b>0.9</b>  | 0.4      | 0.5      |
| Nitration | Abs/cm *ASTM D7624 >20   | <b>8.3</b>  | 7.1      | 7.9      |
| Sulfation | Abs/.1mm *ASTM D7415 >30 | <b>20.2</b> | 18.7     | 19.7     |


## FLUID DEGRADATION

| method           | limit/base               | current     | history1 | history2 |
|------------------|--------------------------|-------------|----------|----------|
| Oxidation        | Abs/.1mm *ASTM D7414 >25 | <b>15.1</b> | 14.3     | 15.0     |
| Base Number (BN) | mg KOH/g ASTM D2896 9.8  | <b>8.8</b>  | 8.5      | 9.0      |




# OIL ANALYSIS REPORT

▲ Silicon (ppm)

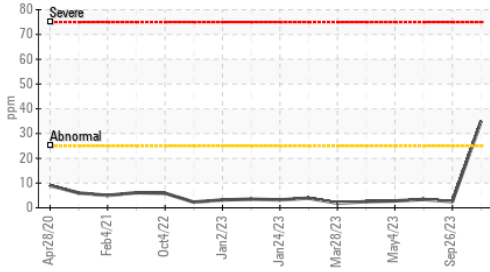

▲ Ferrous Alloys

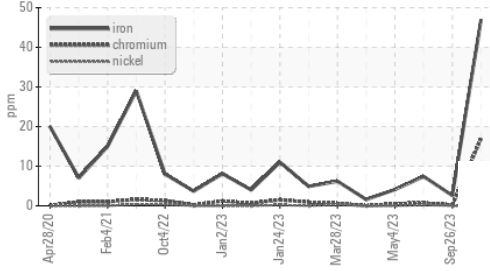


| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |


| FLUID PROPERTIES | method | limit/base | current | history1    | history2 |
|------------------|--------|------------|---------|-------------|----------|
| Visc @ 100°C     | cSt    | ASTM D445  | 15.4    | <b>14.3</b> | 13.9     |

## GRAPHS


▲ Ferrous Alloys

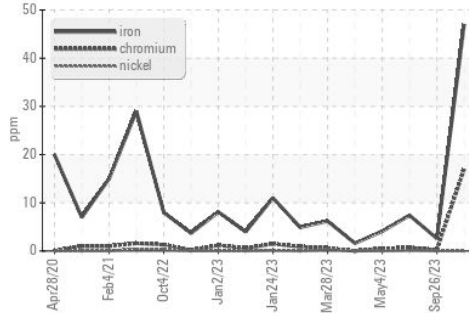


Non-ferrous Metals

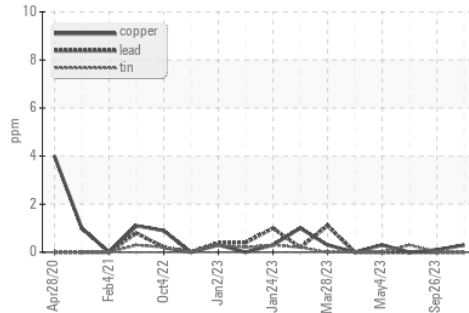


Viscosity @ 100°C

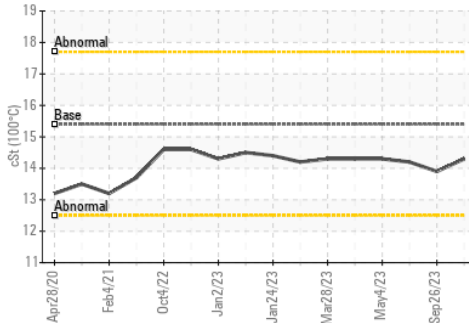


Base Number

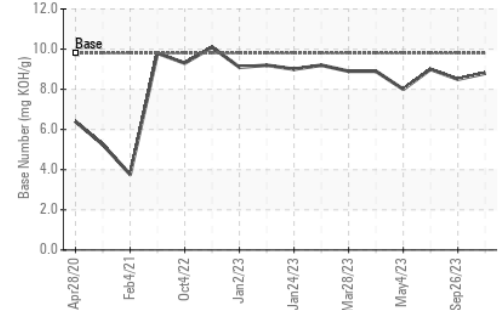

Base Number

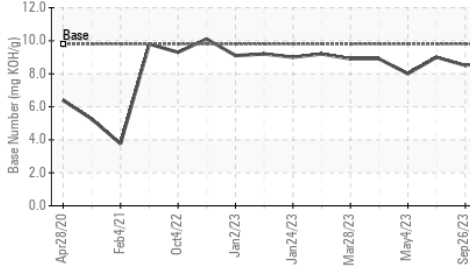

Viscosity @ 100°C

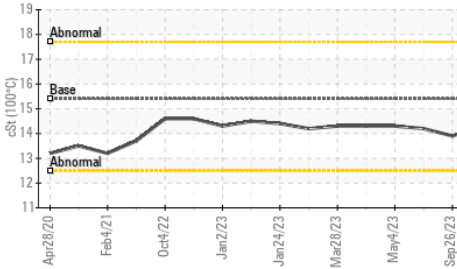

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0100546  
 Lab Number : 06051734  
 Unique Number : 10817683  
 Test Package : FLEET

GFL Environmental - 865 - East Mount Hauling  
 7213 East Mount Houston Road  
 Houston, TX  
 US 77050  
 Contact: Jose Gonzalez  
 jgonzalez2@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: