




OIL ANALYSIS REPORT

Sample Rating Trend

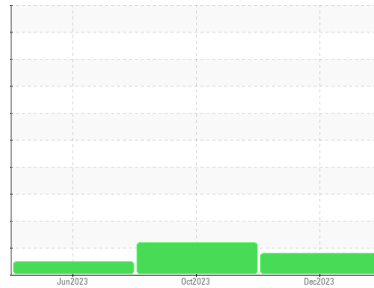

FUEL



Machine Id
525144- SW7530 FREIGHTLINER CASCADIA 125

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	GFL0066579	GFL0066576	GFL0066572	
Sample Date	Client Info	28 Dec 2023	15 Oct 2023	15 Jun 2023	
Machine Age	mls	Client Info	0	0	318351
Oil Age	mls	Client Info	0	0	600
Oil Changed	Client Info	N/A	Changed	Not Changed	
Sample Status		ABNORMAL	ABNORMAL	NORMAL	

CONTAMINATION

method	limit/base	current	history1	history2	
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>80	4	66	21
Chromium	ppm	ASTM D5185m	>5	0	2	2
Nickel	ppm	ASTM D5185m	>2	0	<1	1
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>30	1	6	6
Lead	ppm	ASTM D5185m	>30	0	0	0
Copper	ppm	ASTM D5185m	>150	<1	4	3
Tin	ppm	ASTM D5185m	>5	0	2	<1
Vanadium	ppm	ASTM D5185m		0	<1	<1
Cadmium	ppm	ASTM D5185m		0	<1	0

ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m	0	16	22	<1
Barium	ppm	ASTM D5185m	0	0	<1	0
Molybdenum	ppm	ASTM D5185m	60	52	57	60
Manganese	ppm	ASTM D5185m	0	0	<1	<1
Magnesium	ppm	ASTM D5185m	1010	472	924	988
Calcium	ppm	ASTM D5185m	1070	1738	1086	1054
Phosphorus	ppm	ASTM D5185m	1150	1023	1040	1085
Zinc	ppm	ASTM D5185m	1270	1278	1311	1349
Sulfur	ppm	ASTM D5185m	2060	3324	3625	3220

CONTAMINANTS

method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>20	5	9	5
Sodium	ppm	ASTM D5185m		0	5	2
Potassium	ppm	ASTM D5185m	>20	2	16	3
Fuel	%	ASTM D3524	>5	▲ 6.1	▲ 6.6	<1.0

INFRA-RED




method	limit/base	current	history1	history2		
Soot %	%	*ASTM D7844	>3	0.3	1.3	1.1
Nitration	Abs/cm	*ASTM D7624	>20	5.3	19.1	11.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	17.0	16.4	25.2

FLUID DEGRADATION

method	limit/base	current	history1	history2		
Oxidation	Abs/.1mm	*ASTM D7414	>25	11.0	26.4	20.0
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	8.7	15.3	8.7







OIL ANALYSIS REPORT

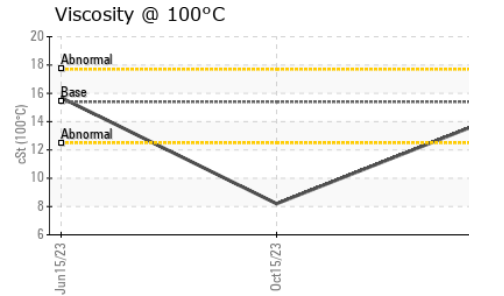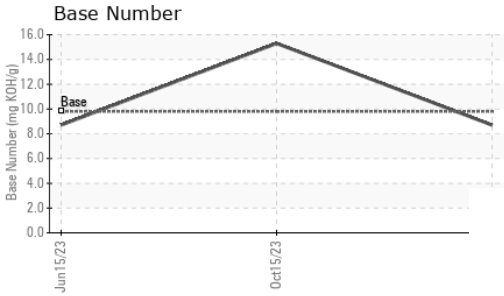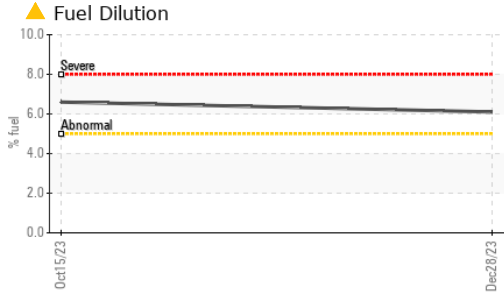

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	14.2	▲ 8.2	15.7

GRAPHS

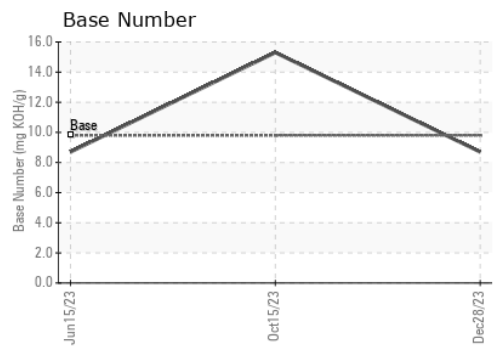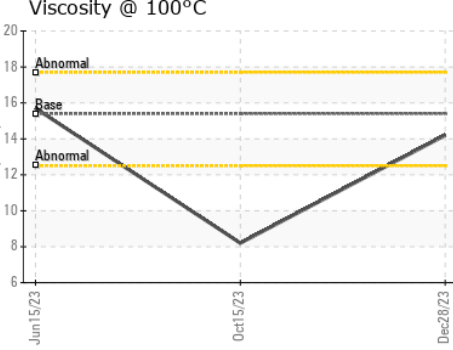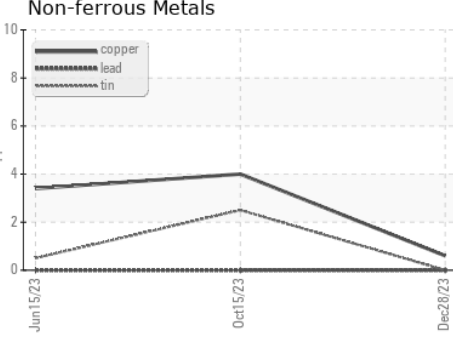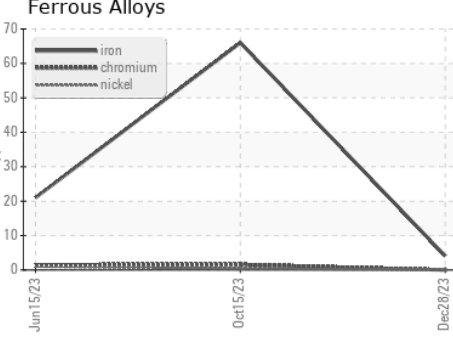

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0066579 **Received** : 05 Jan 2024
Lab Number : 06051750 **Diagnosed** : 09 Jan 2024
Unique Number : 10817699 **Diagnostician** : Wes Davis
Test Package : FLEET (Additional Tests: PercentFuel)

GFL Environmental - 980 - Northside Hauling
 1820 Candle Ridge Park Dr
 Houston, TX
 US 77073
 Contact: Edwin Collins
 ecolins@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)