


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

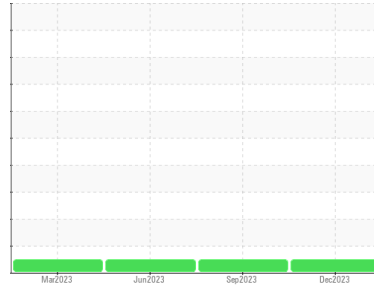

Area
(89949X) Walgreens - Tractor
Machine Id
[Walgreens - Tractor] 136A69011
Component
Diesel Engine
Fluid
PETRO CANADA DURON UHP E6 10W40 (11 GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0105410	PCA0105399	PCA0093845
Sample Date	Client Info		28 Dec 2023	18 Sep 2023	29 Jun 2023
Machine Age	mls	Client Info	671682	643613	622451
Oil Age	mls	Client Info	28069	21800	23123
Oil Changed	Client Info		Changed	Changed	Not Chngd
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	15	16	11
Chromium	ppm	ASTM D5185m >5	<1	<1	<1
Nickel	ppm	ASTM D5185m >2	0	0	0
Titanium	ppm	ASTM D5185m	0	0	<1
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >30	7	7	7
Lead	ppm	ASTM D5185m >30	0	0	0
Copper	ppm	ASTM D5185m >150	4	4	2
Tin	ppm	ASTM D5185m >5	0	<1	<1
Vanadium	ppm	ASTM D5185m	0	0	<1
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	5	4	1
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m 0	61	60	57
Manganese	ppm	ASTM D5185m 0	0	<1	<1
Magnesium	ppm	ASTM D5185m 80	1005	940	937
Calcium	ppm	ASTM D5185m 2400	1092	1010	1030
Phosphorus	ppm	ASTM D5185m 750	1017	975	947
Zinc	ppm	ASTM D5185m 840	1297	1196	1182
Sulfur	ppm	ASTM D5185m 2130	2952	2563	3244

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	7	8	5
Sodium	ppm	ASTM D5185m	2	3	2
Potassium	ppm	ASTM D5185m >20	2	<1	2
Fuel	%	ASTM D3524 >5	0.2	<1.0	<1.0




INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.5	0.6	0.4
Nitration	Abs/cm	*ASTM D7624 >20	8.6	8.8	7.4
Sulfation	Abs/.1mm	*ASTM D7415 >30	20.5	21.2	19.8

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	17.2	17.3	16.5
Base Number (BN)	mg KOH/g	ASTM D2896 9.5	7.2	6.3	7.9





OIL ANALYSIS REPORT

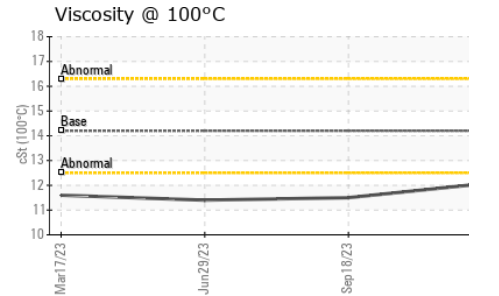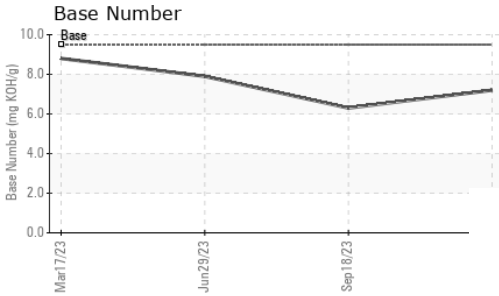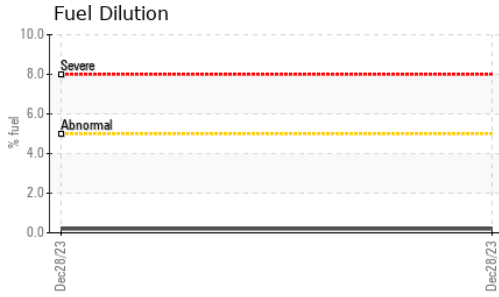

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.2	12.1	11.5	11.4

GRAPHS

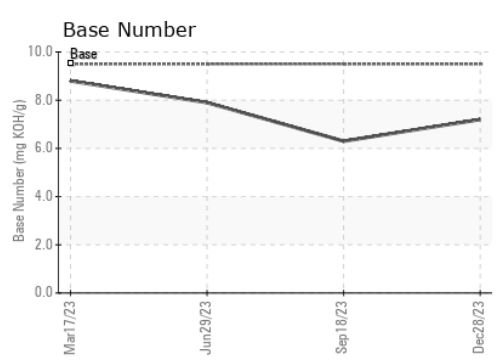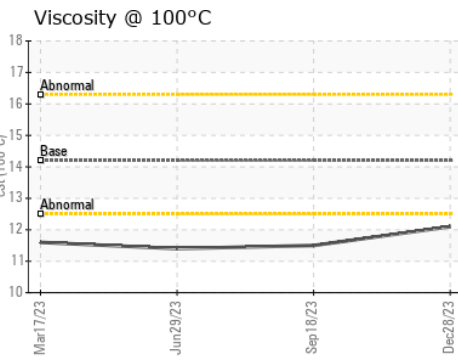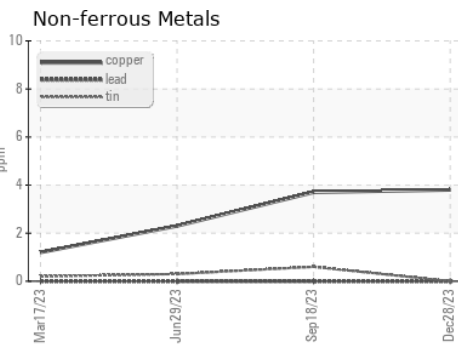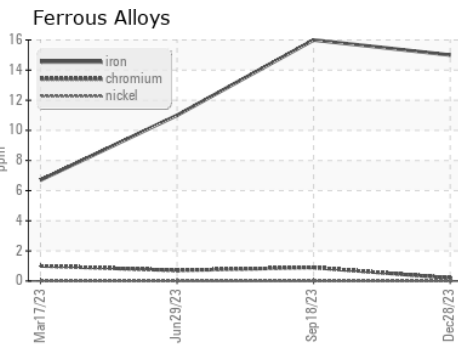

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0105410 **Recieved** : 05 Jan 2024
Lab Number : **06051780** **Diagnosed** : 09 Jan 2024
Unique Number : 10817729 **Diagnostician** : Wes Davis
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

Transervice - Shop 1366 - Berkeley-Woodland
 2370 East Main Street
 Woodland, CA
 US 95776
 Contact: Gary Mann
 gmanna@transervice.com
 T: (530)666-7771
 F: (530)406-7971

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)