

# **OIL ANALYSIS REPORT**

Sample Rating Trend

ISO



Component Gearbox Fluid GEAR OIL ISO 220 (--- GAL)

## DIAGNOSIS

Machine Id

#### Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. We recommend you service the filters on this component. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

#### Wear

All component wear rates are normal.

## Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

SAMPLE INFO		method	limit/base	current	history1	history2
		Client Info	in in Dase	PCA0114527		Thistoryz
Sample Number Sample Date		Client Info		20 Dec 2023		
Machine Age	hrs	Client Info		20 Dec 2023		
Dil Age	hrs	Client Info		0		
Dil Changed	1115	Client Info		N/A		
Sample Status		Olient into		ABNORMAL		
CONTAMINA	TION	method	limit/base	current	history1	history2
Vater		WC Method	>0.2	NEG		
WEAR META	LS	method	limit/base	current	history1	history2
ron	ppm	ASTM D5185m	<u> ~200</u>	23		
Chromium	ppm	ASTM D5185m		<1		
lickel		ASTM D5185m	>10	0		
itanium	ppm	ASTM D5185m	>10	0 <1		
Silver	ppm	ASTM D5185m		0		
Numinum	ppm	ASTM D5185m	>25	1		
.ead	ppm ppm	ASTM D5185m	>20 >50	1		
Copper		ASTM D5185m	>200	6		
ïn	ppm	ASTM D5185m	>10	۰ <1		
anadium	ppm	ASTM D5185m	>10	0		
Cadmium	ppm	ASTM D5185m		0		
	ppm		11 11 11	-		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	50	0		
Barium	ppm	ASTM D5185m	15	10		
Nolybdenum	ppm	ASTM D5185m	15	<1		
langanese	ppm	ASTM D5185m	=0	0		
Agnesium	ppm	ASTM D5185m	50	<1		
Calcium	ppm	ASTM D5185m	50	4		
Phosphorus	ppm	ASTM D5185m	350	151		
Zinc	ppm	ASTM D5185m	100	2		
Sulfur	ppm	ASTM D5185m	12500	10996		
CONTAMINA	NTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	7		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	1		
FLUID CLEAN	<b>VLINESS</b>	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>20000	<u> </u>		
Particles >6μm		ASTM D7647	>5000	<u> </u>		
Particles >14µm		ASTM D7647	>640	494		
Particles >21µm		ASTM D7647	>160	98		
Particles >38µm		ASTM D7647	>40	2		
Particles >71µm		ASTM D7647		0		
Dil Cleanliness		ISO 4406 (c)	>21/19/16	<b>A</b> 24/22/16		
FLUID DEGRA		method	limit/base	current	history1	history2
Acid Number (AN)	KOUK	ASTM D8045	0.05	0.42		

Acid Number (AN)

Report Id: KTHSAI [WUSCAR] 06051838 (Generated: 01/08/2024 08:13:45) Rev: 1

Contact/Location: Service Manager - KTHSAI



Acid Number

1 60 -Abnorma

1.40

1.40 1.20 1.00 1.00 0.80 0.60

- Pio 40

0.20

0.00

250

240

23

€ £220 7

210

200 Ał 190 C/UC-00

Abnormal

Viscosity @ 40°C

# **OIL ANALYSIS REPORT**

scalar

method

\*Visual

limit/base

NONE

current


NONE


history1


history2

VISUAL

White Metal

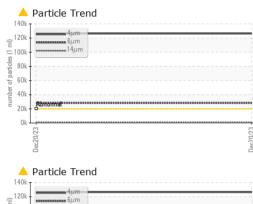

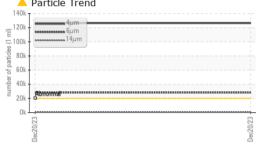

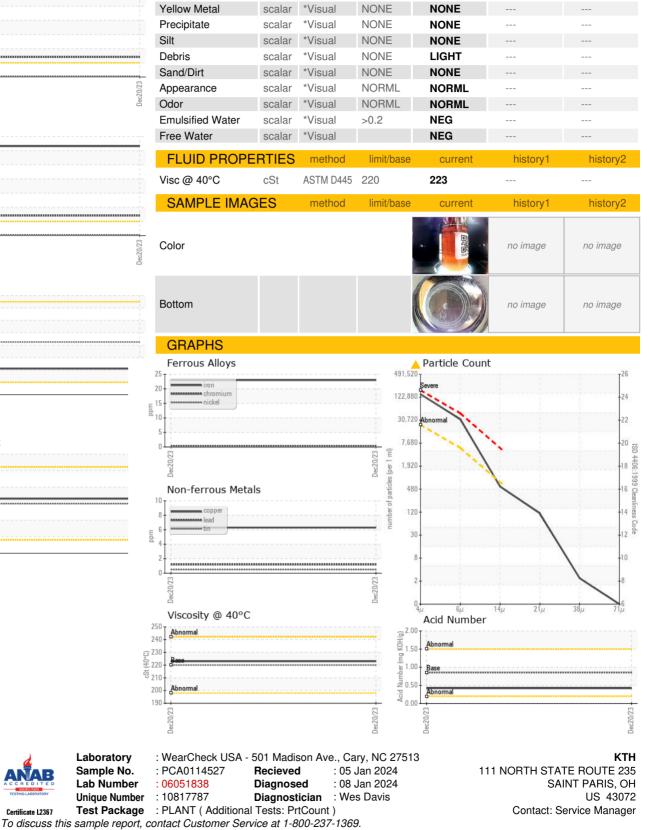



Certificate L2367

Laboratory

Sample No.

Lab Number

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: Service Manager - KTHSAI

T:

F: