


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

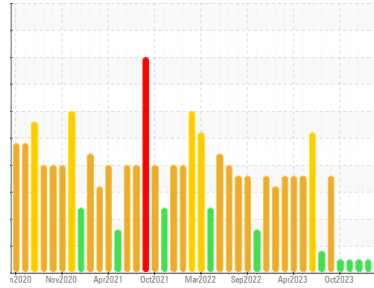

Area  
**GRIND ROOM [98725351]**  
 Machine Id  
**KR-GR-003071 - DUMPER 3A (S/N GRIND A - 11513012)**  
 Component  
**Hydraulic System**  
 Fluid  
**AW HYDRAULIC OIL ISO 68 (--- GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. ( Customer Sample Comment: 98725351 )

### Wear

All component wear rates are normal.

### Contamination

There is a trace of moisture present in the oil. The amount and size of particulates present in the system are acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PCA0114836</b>	PCA0113103	PCA0110822
Sample Date	Client Info	<b>02 Jan 2024</b>	20 Dec 2023	29 Nov 2023
Machine Age	hrs	<b>0</b>	0	0
Oil Age	hrs	<b>0</b>	0	0
Oil Changed	Client Info	<b>N/A</b>	Not Chngd	N/A
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >20	<b>0</b>	0	0
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m >20	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>1</b>	0	0
Lead	ppm	ASTM D5185m >20	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >20	<b>0</b>	0	0
Tin	ppm	ASTM D5185m >20	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 5	<b>0</b>	0	0
Barium	ppm	ASTM D5185m 5	<b>10</b>	0	0
Molybdenum	ppm	ASTM D5185m 5	<b>0</b>	0	0
Manganese	ppm	ASTM D5185m	<b>0</b>	<1	0
Magnesium	ppm	ASTM D5185m 25	<b>0</b>	0	0
Calcium	ppm	ASTM D5185m 200	<b>&lt;1</b>	0	2
Phosphorus	ppm	ASTM D5185m 300	<b>437</b>	403	438
Zinc	ppm	ASTM D5185m 370	<b>0</b>	0	0
Sulfur	ppm	ASTM D5185m 2500	<b>431</b>	281	495

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >15	<b>2</b>	2	2
Sodium	ppm	ASTM D5185m	<b>0</b>	3	0
Potassium	ppm	ASTM D5185m >20	<b>1</b>	2	0
Water	%	ASTM D6304 >0.05	<b>0.052</b>	---	---
ppm Water	ppm	ASTM D6304 >500	<b>520</b>	---	---






## FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >10000	<b>2495</b>	2935	1852
Particles >6µm	ASTM D7647 >2500	<b>312</b>	232	601
Particles >14µm	ASTM D7647 >640	<b>24</b>	25	54
Particles >21µm	ASTM D7647 >160	<b>8</b>	10	12
Particles >38µm	ASTM D7647 >40	<b>3</b>	1	1
Particles >71µm	ASTM D7647 >10	<b>2</b>	0	0
Oil Cleanliness	ISO 4406 (c) >20/18/16	<b>18/15/12</b>	19/15/12	18/16/13

## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045 0.57	<b>0.19</b>	0.19	0.18


# OIL ANALYSIS REPORT

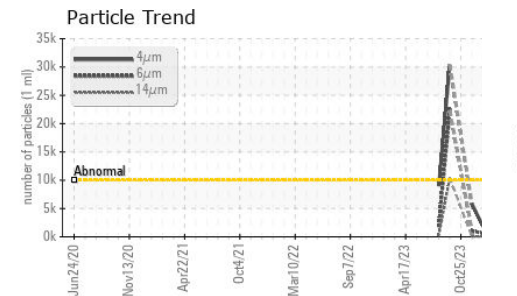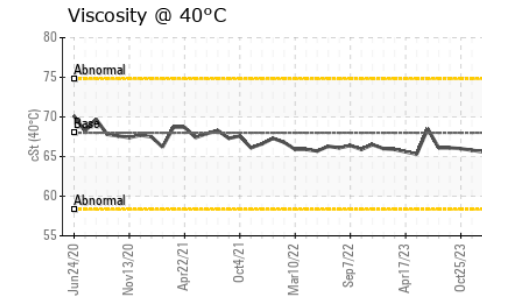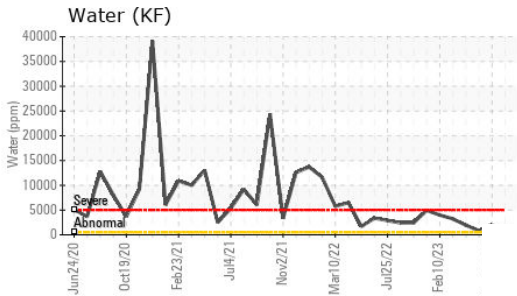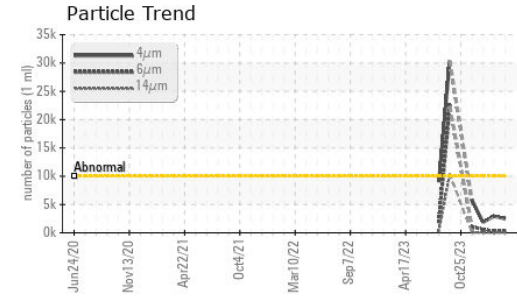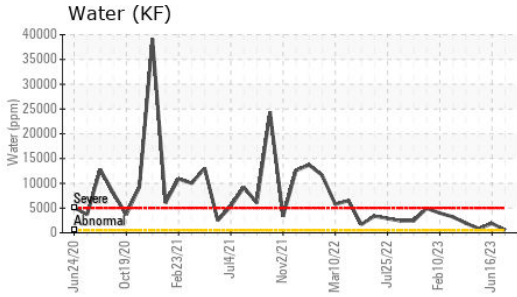






PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	0.2%	NEG
Free Water	scalar	*Visual		NEG	NEG

PARAMETER	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	68	66.1	65.6

PARAMETER	method	limit/base	current	history1	history2
-----------	--------	------------	---------	----------	----------

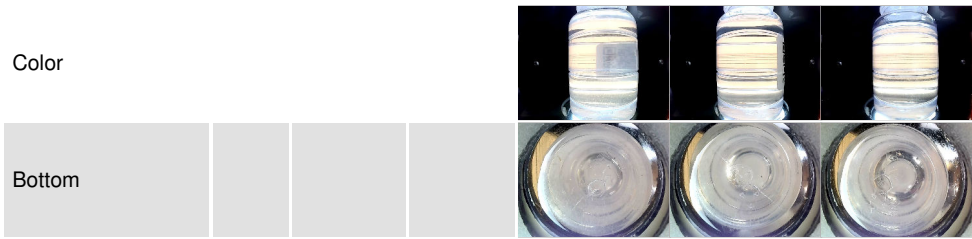

## GRAPHS

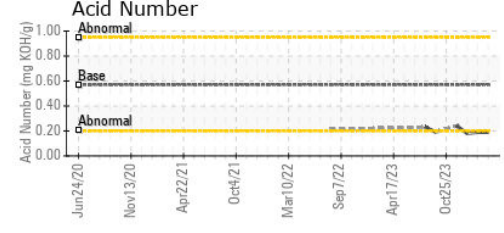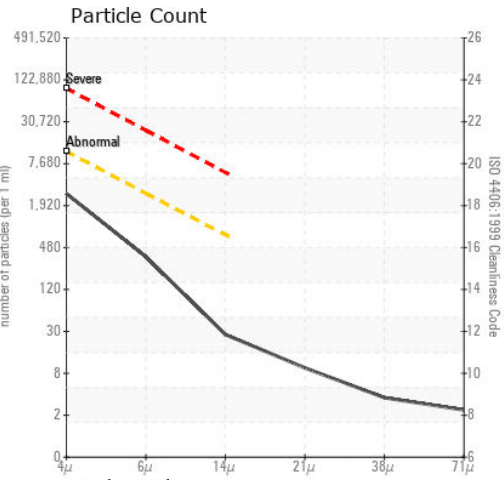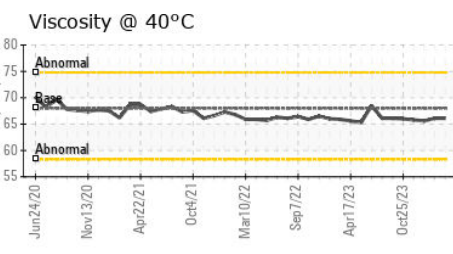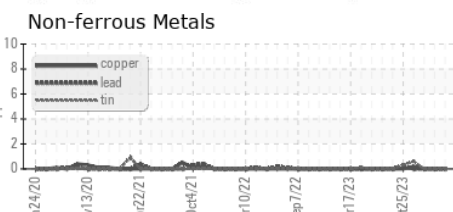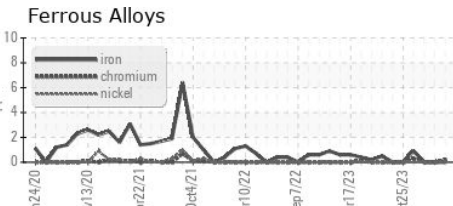

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0114836 **Received** : 05 Jan 2024  
**Lab Number** : 06051848 **Diagnosed** : 09 Jan 2024  
**Unique Number** : 10817797 **Diagnostician** : Doug Bogart  
**Test Package** : IND 2 ( Additional Tests: KF )

**KraftHeinz - Kirksville - Plant 8333 PCA**  
 2504 INDUSTRIAL DR  
 KIRKSVILLE, MO  
 US 63501  
 Contact: WALLACE WARD  
 wallace.ward@kraftheinzcompany.com  
 T: (660)627-1031  
 F: (660)627-5887

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)