

OIL ANALYSIS REPORT

Sample Rating Trend

ISO

MIX ROOM A [98709830]

KR-GR-003110 - REWORK DUMPER 15A (S/N MIX A - 11513052)

Componen

Hydraulic System

AW HYDRAULIC OIL ISO 68 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. (Customer Sample Comment: 98709830)

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 6 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

26020 Mar2021 Jus2022 Jus2022 Des2022 Mary2023 Sep;0223						
SAMPLE INFORI	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0114832	PCA0111170	PCA0110814
Sample Date		Client Info		02 Jan 2024	20 Dec 2023	15 Nov 2023
Machine Age	hrs	Client Info		76768	0	0
Oil Age	hrs	Client Info		76768	0	0
Oil Changed		Client Info		N/A	Not Changd	N/A
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
CONTAMINAT	ION	method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG	NEG	NEG
WEAR METAL	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	1	0	2
Chromium	ppm	ASTM D5185m	>20	<1	0	0
Nickel	ppm	ASTM D5185m	>20	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>20	1	0	<1
Lead	ppm	ASTM D5185m	>20	0	0	0
Copper	ppm	ASTM D5185m	>20	1	1	1
Tin	ppm	ASTM D5185m	>20	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	0	0	0
D .						
Barium	ppm	ASTM D5185m	5	10	0	6
Molybdenum	ppm ppm	ASTM D5185m ASTM D5185m	5 5	10 <1	0	6
				<1		
Molybdenum Manganese Magnesium	ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	5 25	<1 0 0	0 <1 0	0 0 0
Molybdenum Manganese Magnesium Calcium	ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	5 25 200	<1 0 0	0 <1 0	0 0 0 0
Molybdenum Manganese Magnesium Calcium Phosphorus	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	5 25 200 300	<1 0 0 1 366	0 <1 0 0 338	0 0 0 1 334
Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	5 25 200 300 370	<1 0 0 1 366	0 <1 0 0 338	0 0 0 1 334
Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	5 25 200 300	<1 0 0 1 366	0 <1 0 0 338	0 0 0 1 334
Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	5 25 200 300 370 2500 limit/base	<1 0 0 1 366	0 <1 0 0 338	0 0 0 1 334
Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	5 25 200 300 370 2500 limit/base	<1 0 0 1 366 0 522	0 <1 0 0 338 0 349	0 0 0 1 334 0 539
Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	5 25 200 300 370 2500 limit/base	<1 0 0 1 366 0 522	0 <1 0 0 338 0 349 history1	0 0 0 1 334 0 539
Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	5 25 200 300 370 2500 limit/base >15	<1 0 0 1 366 0 522 current	0 <1 0 0 338 0 349 history1 2	0 0 0 1 334 0 539 history2
Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium	ppm	ASTM D5185m	5 25 200 300 370 2500 limit/base >15	<1 0 0 1 366 0 522 current 1	0 <1 0 0 338 0 349 history1 2 5	0 0 0 1 334 0 539 history2 2
Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium	ppm	ASTM D5185m	5 25 200 300 370 2500 limit/base >15 >20	<1 0 0 1 366 0 522 current 1 0	0 <1 0 0 338 0 349 history1 2 5 1	0 0 0 1 334 0 539 history2 2 0 <1
Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium FLUID CLEANI Particles >4µm Particles >6µm	ppm	ASTM D5185m	5 25 200 300 370 2500 limit/base >15 >20 limit/base	<1 0 0 1 366 0 522 current 1 0 1	0 <1 0 0 338 0 349 history1 2 5 1 history1	0 0 0 1 334 0 539 history2 2 0 <1
Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium FLUID CLEANI Particles >4µm	ppm	ASTM D5185m Method ASTM D5185m	5 25 200 300 370 2500 limit/base >15 >20 limit/base >10000	<1 0 0 1 366 0 522 current 1 0 1 current 22245	0 <1 0 0 338 0 349 history1 2 5 1 history1	0 0 0 1 334 0 539 history2 2 0 <1 history2
Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium FLUID CLEANI Particles >4µm Particles >6µm	ppm	ASTM D5185m method ASTM D5185m	5 25 200 300 370 2500 limit/base >15 >20 limit/base >10000 >2500	<1 0 0 1 366 0 522 current 1 0 1 current 22245 1204	0 <1 0 0 338 0 349 history1 2 5 1 history1 ▲ 25987 2117	0 0 0 1 334 0 539 history2 2 0 <1 history2 ^ 22201
Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium FLUID CLEANI Particles >4µm Particles >14µm Particles >21µm Particles >38µm	ppm	ASTM D5185m Method ASTM D5185m	5 25 200 300 370 2500 limit/base >15 >20 limit/base >10000 >2500 >640	<1 0 0 1 366 0 522 current 1 0 1 current 22245 1204 60	0 <1 0 0 338 0 349 history1 2 5 1 history1 ▲ 25987 2117 144	0 0 0 1 334 0 539 history2 2 0 <1 history2 ▲ 22201 578 33
Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium FLUID CLEANI Particles >4µm Particles >14µm Particles >21µm	ppm	ASTM D5185m method ASTM D5185m ASTM D7647 ASTM D7647 ASTM D7647	5 25 200 300 370 2500 limit/base >15 >20 limit/base >10000 >2500 >640 >160	<1 0 0 1 366 0 522 current 1 0 1 current 22245 1204 60 11	0 <1 0 0 338 0 349 history1 2 5 1 history1 ▲ 25987 2117 144 28	0 0 0 1 334 0 539 history2 2 0 <1 history2 ▲ 22201 578 33 8
Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium FLUID CLEANI Particles >4µm Particles >14µm Particles >21µm Particles >38µm	ppm	ASTM D5185m Method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	5 25 200 300 370 2500 limit/base >15 >20 limit/base >10000 >2500 >640 >40	<1 0 0 1 366 0 522 current 1 0 1 current 22245 1204 60 11 0	0 <1 0 0 338 0 349 history1 2 5 1 history1 ▲ 25987 2117 144 28 0	0 0 0 1 334 0 539 history2 2 0 <1 history2 ▲ 22201 578 33 8 0

Acid Number (AN)


mg KOH/g ASTM D8045 0.57

0.22

0.21



OIL ANALYSIS REPORT

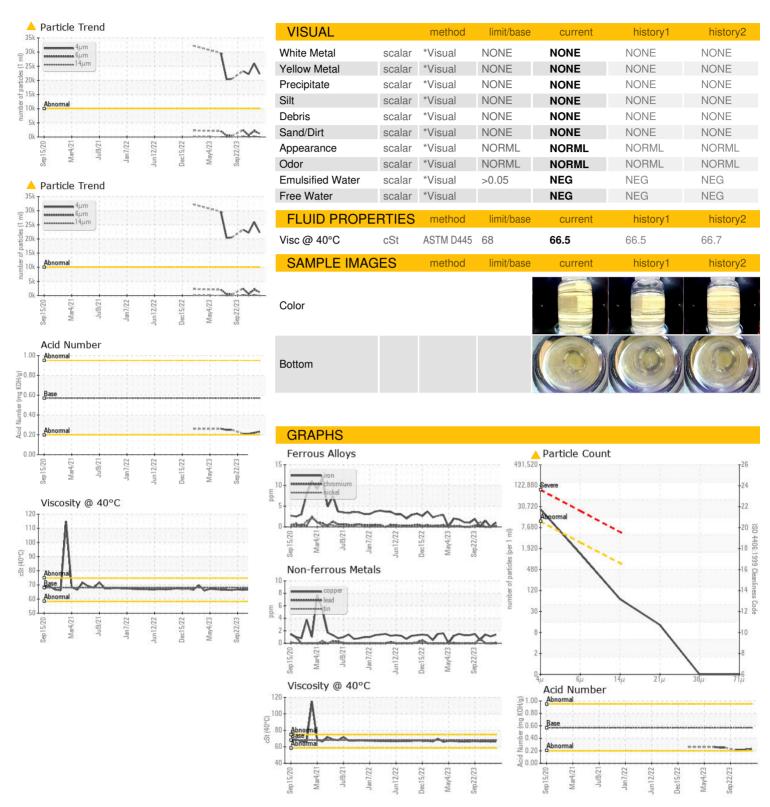





Laboratory Sample No. Lab Number **Unique Number** Test Package

: IND 2

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : PCA0114832 : 06051851 : 10817800

Recieved Diagnosed Diagnostician

: 05 Jan 2024 : 08 Jan 2024 : Angela Borella

Contact: WALLACE WARD wallace.ward@kraftheinzcompany.com

T: (660)627-1031

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F: (660)627-5887

KraftHeinz - Kirksville - Plant 8333 PCA

2504 INDUSTRIAL DR

KIRKSVILLE, MO

US 63501