


OIL ANALYSIS REPORT

Sample Rating Trend



ISO

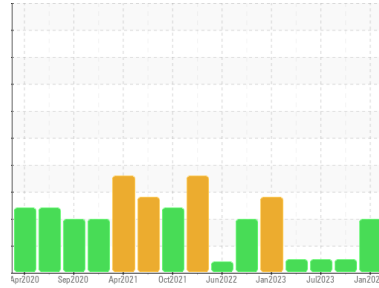

Area
ARMOR INOX [98724412]
 Machine Id
KR-GR-000823 - DUOFLEX A2 CRANE (S/N ARMOR-INOX)
 Component
Hoist
 Fluid
MOBIL GLYGOYLE HE ISO 460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. (Customer Sample Comment: 98724412)

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PCA0114833	PCA0106042	PCA0101937
Sample Date	Client Info	02 Jan 2024	22 Oct 2023	31 Jul 2023
Machine Age	hrs	0	0	0
Oil Age	hrs	0	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		ABNORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.05	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >20	1	0	5
Chromium	ppm ASTM D5185m >20	<1	0	0
Nickel	ppm ASTM D5185m >20	0	1	0
Titanium	ppm ASTM D5185m	<1	0	0
Silver	ppm ASTM D5185m	0	<1	0
Aluminum	ppm ASTM D5185m >20	1	1	<1
Lead	ppm ASTM D5185m >20	0	<1	0
Copper	ppm ASTM D5185m >20	0	0	0
Tin	ppm ASTM D5185m >20	<1	<1	0
Vanadium	ppm ASTM D5185m	0	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	<1	4	0
Barium	ppm ASTM D5185m	10	0	0
Molybdenum	ppm ASTM D5185m	61	72	22
Manganese	ppm ASTM D5185m	0	<1	<1
Magnesium	ppm ASTM D5185m	<1	6	2
Calcium	ppm ASTM D5185m	15	23	5
Phosphorus	ppm ASTM D5185m	557	598	467
Zinc	ppm ASTM D5185m	<1	2	6
Sulfur	ppm ASTM D5185m	3941	5016	1895

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >15	2	3	1
Sodium	ppm ASTM D5185m	0	<1	0
Potassium	ppm ASTM D5185m >20	1	2	1

FLUID CLEANLINESS


method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >5000	▲ 43970	---	---
Particles >6µm	ASTM D7647 >1300	▲ 12163	---	---
Particles >14µm	ASTM D7647 >160	▲ 793	---	---
Particles >21µm	ASTM D7647 >40	▲ 132	---	---
Particles >38µm	ASTM D7647 >10	3	---	---
Particles >71µm	ASTM D7647 >3	1	---	---
Oil Cleanliness	ISO 4406 (c) >19/17/14	▲ 23/21/17	---	---

FLUID DEGRADATION


method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D8045	0.87	0.64	---

OIL ANALYSIS REPORT


▲ Particle Trend

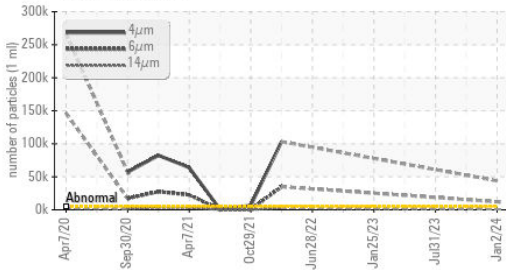


▲ Particle Trend

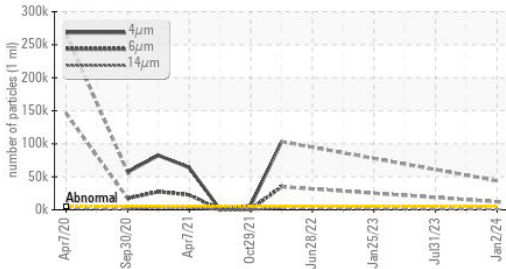

Acid Number

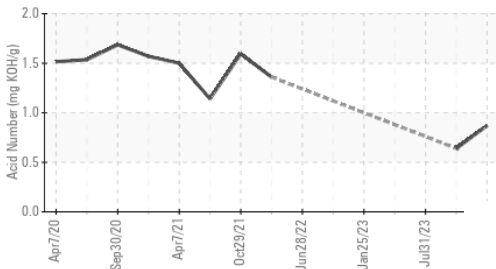

Viscosity @ 40°C

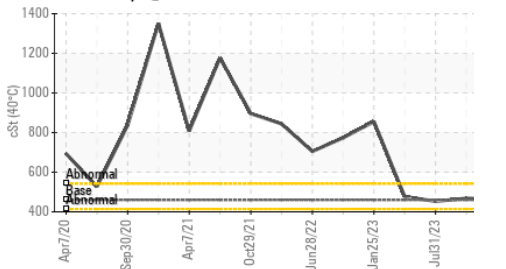

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 460	463	468	453

▲ SAMPLE IMAGES


SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

GRAPHS


Ferrous Alloys

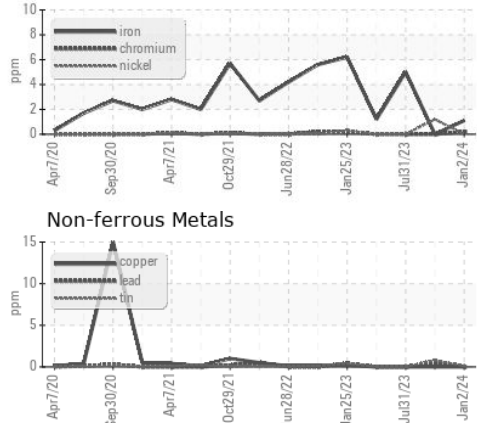


Non-ferrous Metals

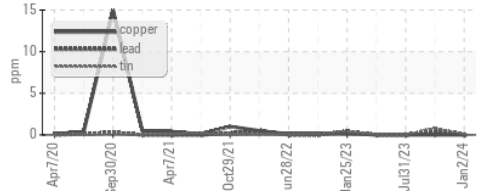


Viscosity @ 40°C

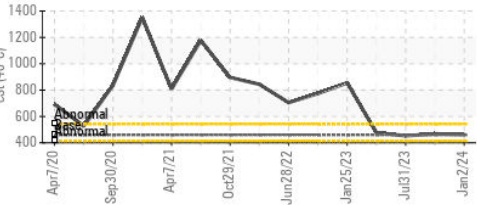

▲ Particle Count

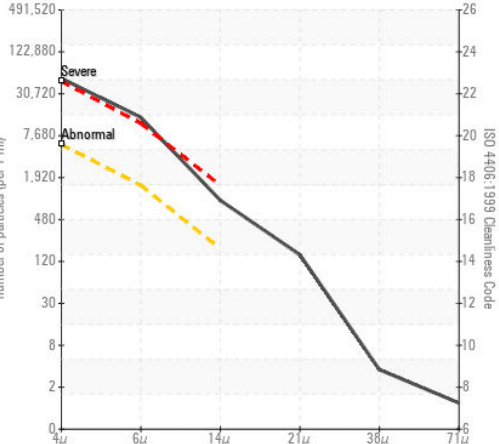

Acid Number

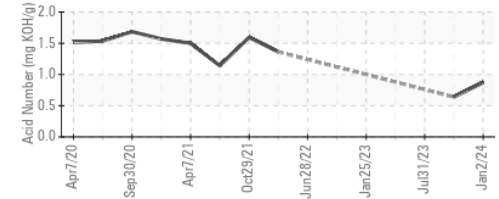

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0114833 **Received** : 05 Jan 2024
Lab Number : 06051855 **Diagnosed** : 08 Jan 2024
Unique Number : 10817804 **Diagnostician** : Angela Borella
Test Package : IND 2

KraftHeinz - Kirksville - Plant 8333 PCA
 2504 INDUSTRIAL DR
 KIRKSVILLE, MO
 US 63501
 Contact: WALLACE WARD
 wallace.ward@kraftheinzcompany.com
 T: (660)627-1031
 F: (660)627-5887

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)