




# OIL ANALYSIS REPORT

Sample Rating Trend

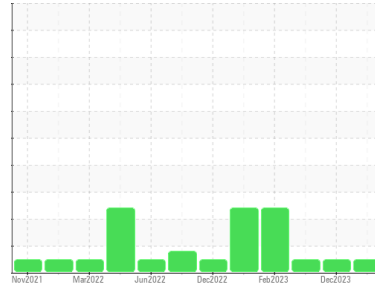

**NORMAL**



Machine Id  
**727092-310018**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2    |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>GFL0092127</b>  | GFL0092035  | GFL0078187  |
| Sample Date   | Client Info |             | <b>03 Jan 2024</b> | 02 Dec 2023 | 27 Apr 2023 |
| Machine Age   | mls         | Client Info | <b>160591</b>      | 160591      | 160591      |
| Oil Age       | mls         | Client Info | <b>154227</b>      | 154227      | 0           |
| Oil Changed   | Client Info |             | <b>Changed</b>     | Not Changd  | Not Changd  |
| Sample Status |             |             | <b>NORMAL</b>      | NORMAL      | NORMAL      |

## CONTAMINATION

|        | method    | limit/base | current        | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel   | WC Method | >5         | <b>&lt;1.0</b> | <1.0     | 1.5      |
| Water  | WC Method | >0.2       | <b>NEG</b>     | NEG      | NEG      |
| Glycol | WC Method |            | <b>NEG</b>     | NEG      | NEG      |

## WEAR METALS

|          | method | limit/base       | current      | history1 | history2 |
|----------|--------|------------------|--------------|----------|----------|
| Iron     | ppm    | ASTM D5185m >100 | <b>0</b>     | 6        | 2        |
| Chromium | ppm    | ASTM D5185m >20  | <b>0</b>     | <1       | 0        |
| Nickel   | ppm    | ASTM D5185m >4   | <b>0</b>     | 0        | 0        |
| Titanium | ppm    | ASTM D5185m      | <b>0</b>     | 0        | 0        |
| Silver   | ppm    | ASTM D5185m >3   | <b>0</b>     | 0        | 0        |
| Aluminum | ppm    | ASTM D5185m >20  | <b>&lt;1</b> | 1        | <1       |
| Lead     | ppm    | ASTM D5185m >40  | <b>0</b>     | 0        | 0        |
| Copper   | ppm    | ASTM D5185m >330 | <b>0</b>     | <1       | 0        |
| Tin      | ppm    | ASTM D5185m >15  | <b>0</b>     | 0        | 0        |
| Vanadium | ppm    | ASTM D5185m      | <b>0</b>     | 0        | 0        |
| Cadmium  | ppm    | ASTM D5185m      | <b>0</b>     | 0        | 0        |

## ADDITIVES

|            | method | limit/base       | current      | history1 | history2 |
|------------|--------|------------------|--------------|----------|----------|
| Boron      | ppm    | ASTM D5185m 0    | <b>2</b>     | 10       | 2        |
| Barium     | ppm    | ASTM D5185m 0    | <b>0</b>     | 2        | 0        |
| Molybdenum | ppm    | ASTM D5185m 60   | <b>57</b>    | 54       | 62       |
| Manganese  | ppm    | ASTM D5185m 0    | <b>&lt;1</b> | 0        | <1       |
| Magnesium  | ppm    | ASTM D5185m 1010 | <b>944</b>   | 771      | 1034     |
| Calcium    | ppm    | ASTM D5185m 1070 | <b>1001</b>  | 1095     | 1141     |
| Phosphorus | ppm    | ASTM D5185m 1150 | <b>1079</b>  | 876      | 1091     |
| Zinc       | ppm    | ASTM D5185m 1270 | <b>1228</b>  | 1050     | 1351     |
| Sulfur     | ppm    | ASTM D5185m 2060 | <b>3054</b>  | 2973     | 3715     |

## CONTAMINANTS

|           | method | limit/base      | current      | history1 | history2 |
|-----------|--------|-----------------|--------------|----------|----------|
| Silicon   | ppm    | ASTM D5185m >25 | <b>3</b>     | 9        | 4        |
| Sodium    | ppm    | ASTM D5185m     | <b>&lt;1</b> | 3        | 22       |
| Potassium | ppm    | ASTM D5185m >20 | <b>0</b>     | 1        | 2        |

## INFRA-RED



|           | method   | limit/base      | current     | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot %    | %        | *ASTM D7844 >3  | <b>0.1</b>  | 0.3      | 0.1      |
| Nitration | Abs/cm   | *ASTM D7624 >20 | <b>4.9</b>  | 9.1      | 5.2      |
| Sulfation | Abs/.1mm | *ASTM D7415 >30 | <b>17.6</b> | 19.7     | 16.0     |

## FLUID DEGRADATION

|                  | method   | limit/base      | current     | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Oxidation        | Abs/.1mm | *ASTM D7414 >25 | <b>13.5</b> | 17.7     | 12.9     |
| Base Number (BN) | mg KOH/g | ASTM D2896 9.8  | <b>9.4</b>  | 8.8      | 9.1      |







# OIL ANALYSIS REPORT

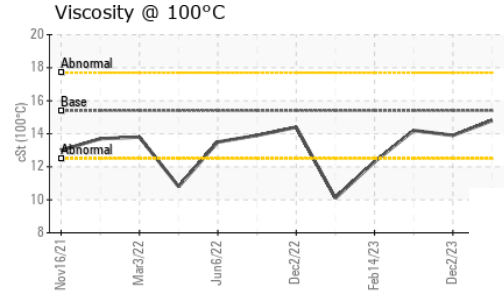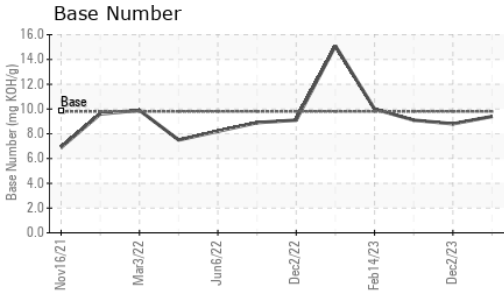

| PARAMETER        | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |

| FLUID PROPERTIES | method | limit/base | current | history1    | history2 |      |
|------------------|--------|------------|---------|-------------|----------|------|
| Visc @ 100°C     | cSt    | ASTM D445  | 15.4    | <b>14.8</b> | 13.9     | 14.2 |

## GRAPHS

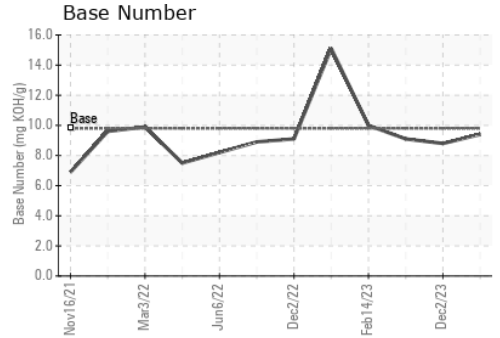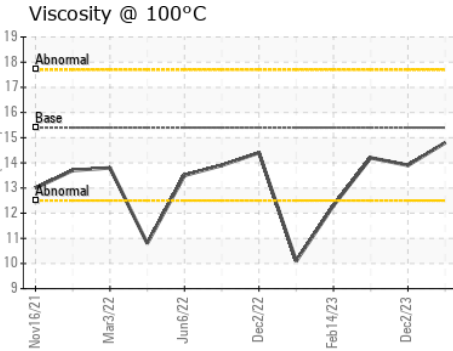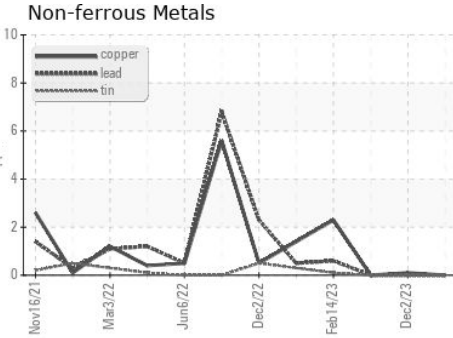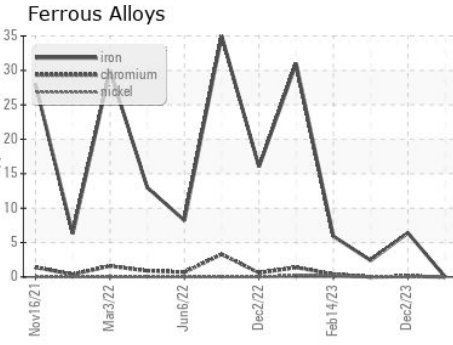

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0092127 **Received** : 05 Jan 2024  
**Lab Number** : 06052369 **Diagnosed** : 08 Jan 2024  
**Unique Number** : 10818318 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 856 - Houston South**  
 8515 Highway 6 South  
 Houston, TX  
 US 77083  
 Contact: Apolinar Zacarias  
 pzacariascano@gflenv.com

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)