

## **OIL ANALYSIS REPORT**



# Machine Id 226649

Component Diesel Engine Fluid PETRO CANADA DURON SHP 10W30 (--- 0

### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

#### Wear

Metal levels are typical for a new component breaking in.

#### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. No other contaminants were detected in the oil.


#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

TS)			Jun2023	0ct2023		
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0106283	PCA0095937	
Sample Date		Client Info		12 Oct 2023	12 Jun 2023	
Machine Age	mls	Client Info		18369	9835	
Oil Age	mls	Client Info		0	0	
Oil Changed		Client Info		Not Changd	Not Changd	
Sample Status				NORMAL	NORMAL	
CONTAMINAT	ION	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0	<1.0	
Water		WC Method	>0.2	NEG	NEG	
Glycol		WC Method		NEG	NEG	
WEAR METAL	.S	method	limit/base	current	history1	history2
ron	ppm	ASTM D5185m	>100	125	74	
Chromium	ppm	ASTM D5185m	>20	4	3	
Nickel	ppm	ASTM D5185m	>4	1	1	
Titanium	ppm	ASTM D5185m		<1	0	
Silver	ppm	ASTM D5185m	>3	0	0	
Aluminum	ppm	ASTM D5185m	>20	24	17	
Lead	ppm	ASTM D5185m	>40	0	0	
Copper	ppm	ASTM D5185m	>330	55	46	
Tin	ppm	ASTM D5185m	>15	6	6	
Vanadium	ppm	ASTM D5185m		0	<1	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	24	41	
Barium	ppm	ASTM D5185m	0	0	0	
Molybdenum	ppm	ASTM D5185m	50	45	43	
Manganese	ppm	ASTM D5185m	0	12	11	
Magnesium	ppm	ASTM D5185m	950	575	571	
Calcium	ppm	ASTM D5185m	1050	1864	1888	
Phosphorus	ppm	ASTM D5185m	995	839	823	
Zinc	ppm	ASTM D5185m	1180	1002	1048	
Sulfur	ppm	ASTM D5185m	2600	2137	2931	
CONTAMINAN	NTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	17	14	
Sodium	ppm	ASTM D5185m		9	7	
Potassium	ppm	ASTM D5185m	>20	57	29	
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	1.1	0.5	
Nitration	Abs/cm	*ASTM D7624	>20	15.8	10.0	
Sulfation	Abs/.1mm	*ASTM D7415	>30	27.6	24.7	
FLUID DEGRA	DATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	32.5	25.2	



# **OIL ANALYSIS REPORT**

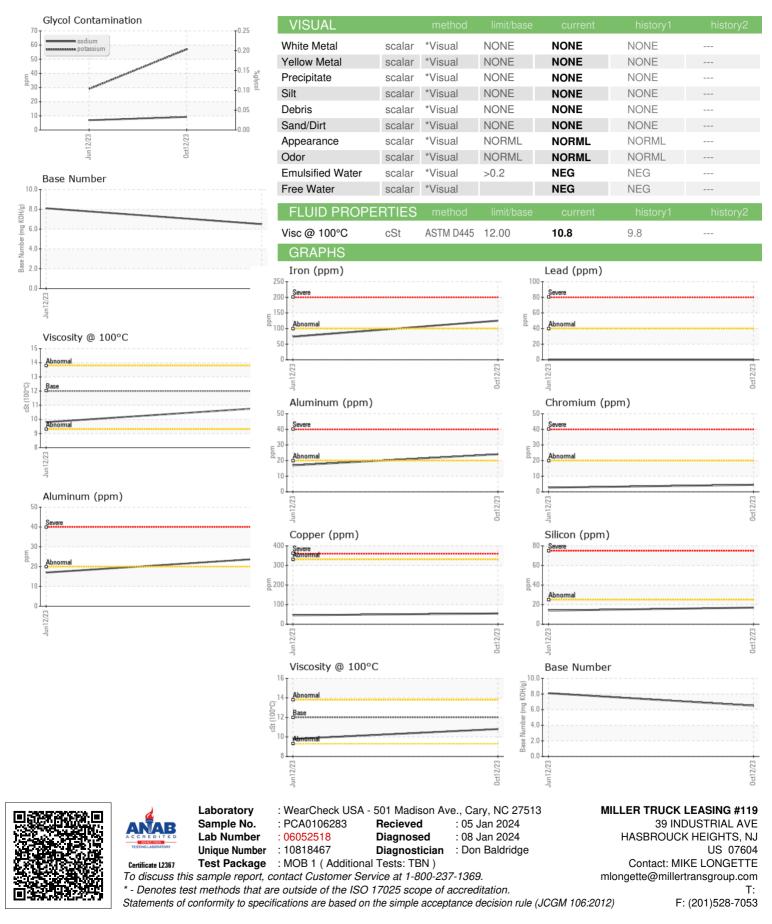

Contact/Location: MIKE LONGETTE - MILRUT