


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



Machine Id **542178** Component

Diesel Engine

PETRO CANADA DURON SHP 10W30 (--- QTS)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. No other contaminants were detected in the oil.


Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

QTS)						
·			Aug2023	Dec2023		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0115265	PCA0104237	
Sample Date		Client Info		26 Dec 2023	23 Aug 2023	
Machine Age	mls	Client Info		34997	19473	
Oil Age	mls	Client Info		0	0	
Oil Changed		Client Info		N/A	Not Changd	
Sample Status				NORMAL	NORMAL	
CONTAMINATI	ON	method	limit/base	current	history1	history2
Fuel		WC Method		<1.0	<1.0	
Water		WC Method	>0.2	NEG	NEG	
Glycol		WC Method		NEG	NEG	
WEAR METALS	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	73	52	
Chromium	ppm	ASTM D5185m	>20	4	2	
Nickel	ppm	ASTM D5185m	>4	<1	<1	
Titanium	ppm	ASTM D5185m		<1	0	
Silver	ppm	ASTM D5185m	>3	<1	<1	
Aluminum	ppm	ASTM D5185m	>20	89	51	
Lead	ppm	ASTM D5185m	>40	0	0	
Copper	ppm	ASTM D5185m	>330	281	284	
Tin	ppm	ASTM D5185m	>15	7	7	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	28	37	
Barium	ppm	ASTM D5185m	0	0	0	
Molybdenum	ppm	ASTM D5185m	50	47	43	
Manganese	ppm	ASTM D5185m	0	4	4	
Magnesium	ppm	ASTM D5185m	950	605	576	
Calcium	ppm	ASTM D5185m	1050	1694	1681	
Phosphorus	ppm	ASTM D5185m	995	821	765	
Zinc Sulfur	ppm	ASTM D5185m ASTM D5185m	1180 2600	976 1898	970 2601	
CONTAMINAN		method	limit/base	current	history1	history2
					•	
Silicon	ppm	ASTM D5185m	>25	8	7	
Sodium Potassium	ppm	ASTM D5185m ASTM D5185m	>20	5 206	5 118	
	ppm					
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	1.4	0.9	
Nitration	Abs/cm	*ASTM D7624	>20	11.4	9.4	
Sulfation	Abs/.1mm	*ASTM D7415	>30	24.7	22.9	
FLUID DEGRAD	ATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	24.9	21.9	
Base Number (BN)	mg KOH/g	ASTM D2896		7.9	8.2	



OIL ANALYSIS REPORT

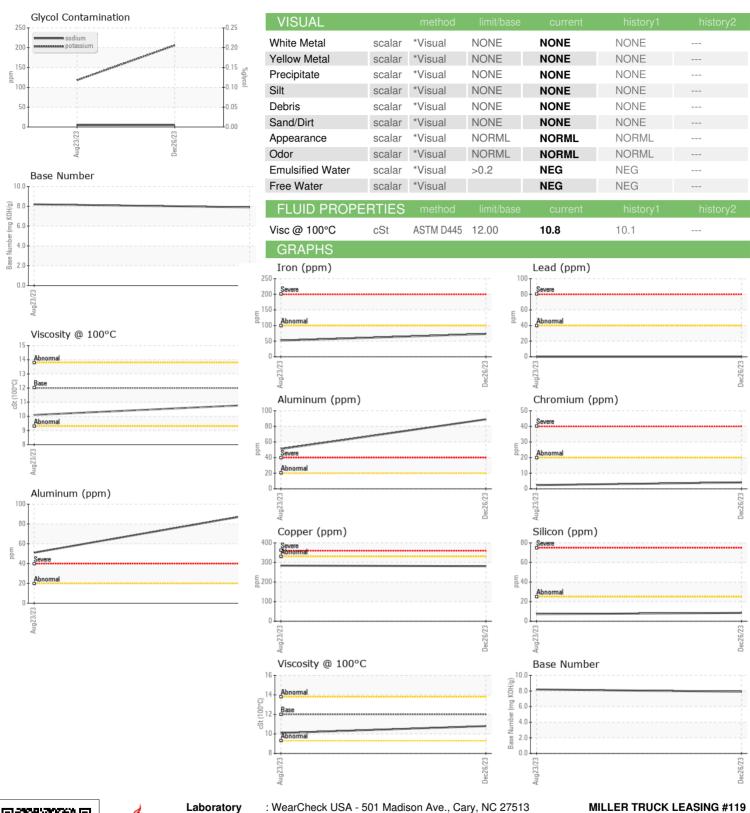





Certificate L2367

Laboratory Sample No. Lab Number **Unique Number**

: PCA0115265 : 06052547 : 10818496

Recieved Diagnosed

: 05 Jan 2024 : 08 Jan 2024

Diagnostician : Don Baldridge

Test Package : MOB 1 (Additional Tests: TBN) To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

MILLER TRUCK LEASING #119

39 INDUSTRIAL AVE HASBROUCK HEIGHTS, NJ US 07604

Contact: MIKE LONGETTE

mlongette@millertransgroup.com T:

F: (201)528-7053