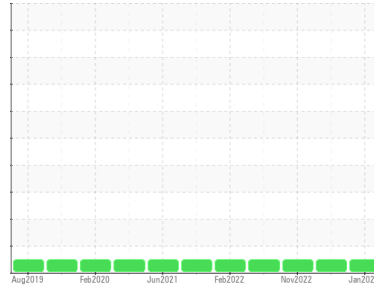


# OIL ANALYSIS REPORT

**Sample Rating Trend**

**NORMAL**

 Machine Id  
**388588**

 Component  
**Diesel Engine**

 Fluid  
**PETRO CANADA DURON SHP 10W30 (--- QTS)**
**DIAGNOSIS**
**Recommendation**

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

**Wear**

All component wear rates are normal.

**Contamination**

There is no indication of any contamination in the oil.

**Fluid Condition**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0115223</b>	PCA0104236	PCA0083534
Sample Date	Client Info			<b>02 Jan 2024</b>	22 Aug 2023	17 Nov 2022
Machine Age	mls Client Info			<b>182578</b>	171317	155176
Oil Age	mls Client Info			<b>0</b>	0	0
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>14</b>	14	16
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	2	2
Lead	ppm	ASTM D5185m	>40	<b>2</b>	<1	2
Copper	ppm	ASTM D5185m	>330	<b>1</b>	2	1
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>10</b>	8	4
Barium	ppm	ASTM D5185m	0	<b>10</b>	0	0
Molybdenum	ppm	ASTM D5185m	50	<b>66</b>	63	76
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	950	<b>826</b>	940	892
Calcium	ppm	ASTM D5185m	1050	<b>1214</b>	1126	1150
Phosphorus	ppm	ASTM D5185m	995	<b>1070</b>	1073	1023
Zinc	ppm	ASTM D5185m	1180	<b>1211</b>	1319	1195
Sulfur	ppm	ASTM D5185m	2600	<b>3260</b>	3880	3469

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>3</b>	3	4
Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	3	6
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	2	4

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.7</b>	0.6	0.9
Nitration	Abs/cm	*ASTM D7624	>20	<b>10.7</b>	10.1	12.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.5</b>	19.2	22.4

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>19.0</b>	17.7	21.6
Base Number (BN)	mg KOH/g	ASTM D2896		<b>7.8</b>	8.1	8.6









# OIL ANALYSIS REPORT

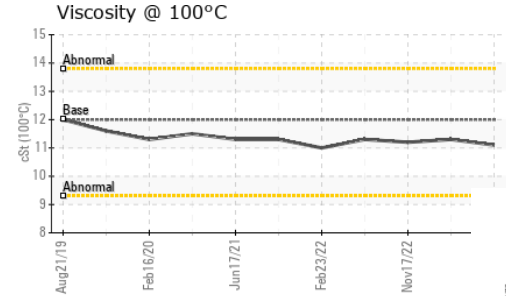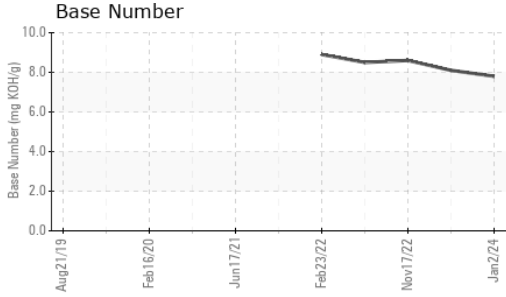

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>11.1</b>	11.3	11.2

## GRAPHS

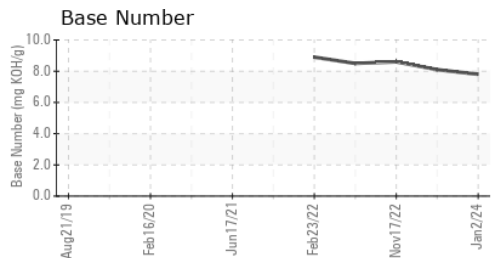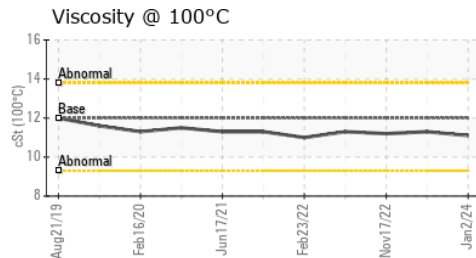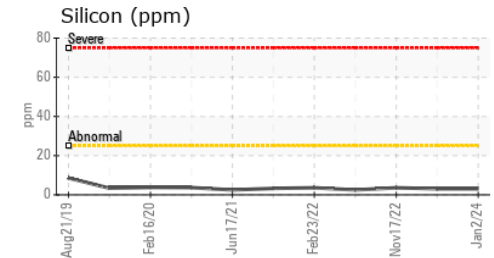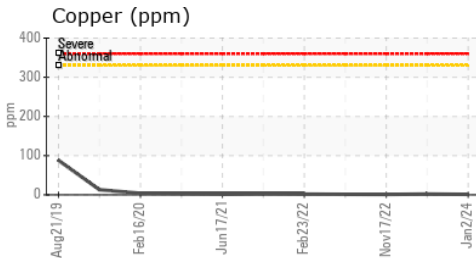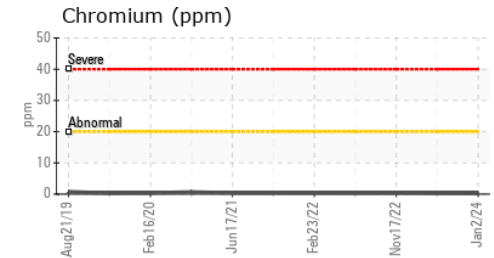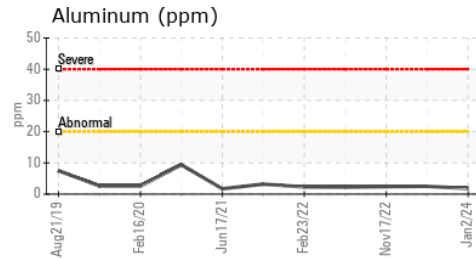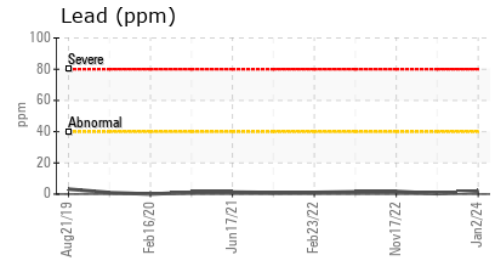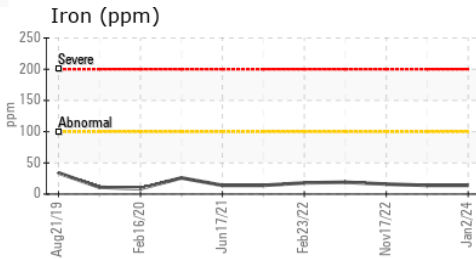

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0115223 **Recieved** : 05 Jan 2024  
**Lab Number** : 06052564 **Diagnosed** : 08 Jan 2024  
**Unique Number** : 10818513 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**MILLER TRUCK LEASING #119**  
 39 INDUSTRIAL AVE  
 HASBROUCK HEIGHTS, NJ  
 US 07604  
 Contact: MIKE LONGETTE  
 mlongette@millertransgroup.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (201)528-7053