




# OIL ANALYSIS REPORT

Sample Rating Trend

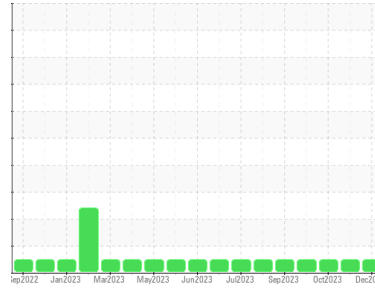

**NORMAL**



Machine Id  
**2869**

Component  
**Transmission (Auto)**

Fluid  
**PETRO CANADA DuraDrive HD Synthetic 668 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2    |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>GFL0107258</b>  | GFL0097932  | GFL0097866  |
| Sample Date   | Client Info |             | <b>29 Dec 2023</b> | 15 Nov 2023 | 12 Oct 2023 |
| Machine Age   | hrs         | Client Info | <b>2868</b>        | 2607        | 2469        |
| Oil Age       | hrs         | Client Info | <b>641</b>         | 380         | 242         |
| Oil Changed   | Client Info |             | <b>Not Chngd</b>   | Not Chngd   | Not Chngd   |
| Sample Status |             |             | <b>NORMAL</b>      | NORMAL      | NORMAL      |

## CONTAMINATION

|       | method    | limit/base | current    | history1 | history2 |
|-------|-----------|------------|------------|----------|----------|
| Water | WC Method | >0.1       | <b>NEG</b> | NEG      | NEG      |

## WEAR METALS

|          | method | limit/base       | current      | history1 | history2 |
|----------|--------|------------------|--------------|----------|----------|
| Iron     | ppm    | ASTM D5185m >160 | <b>17</b>    | 40       | 41       |
| Chromium | ppm    | ASTM D5185m >5   | <b>0</b>     | 0        | <1       |
| Nickel   | ppm    | ASTM D5185m >5   | <b>0</b>     | 0        | 0        |
| Titanium | ppm    | ASTM D5185m      | <b>0</b>     | 0        | 0        |
| Silver   | ppm    | ASTM D5185m >5   | <b>0</b>     | 0        | 0        |
| Aluminum | ppm    | ASTM D5185m >50  | <b>6</b>     | 12       | 12       |
| Lead     | ppm    | ASTM D5185m >50  | <b>4</b>     | 7        | 10       |
| Copper   | ppm    | ASTM D5185m >225 | <b>3</b>     | 4        | 6        |
| Tin      | ppm    | ASTM D5185m >10  | <b>&lt;1</b> | 0        | 2        |
| Vanadium | ppm    | ASTM D5185m      | <b>0</b>     | 0        | 0        |
| Cadmium  | ppm    | ASTM D5185m      | <b>0</b>     | 0        | 0        |

## ADDITIVES

|            | method | limit/base  | current      | history1 | history2 |
|------------|--------|-------------|--------------|----------|----------|
| Boron      | ppm    | ASTM D5185m | <b>68</b>    | 73       | 73       |
| Barium     | ppm    | ASTM D5185m | <b>0</b>     | 0        | 0        |
| Molybdenum | ppm    | ASTM D5185m | <b>0</b>     | 8        | <1       |
| Manganese  | ppm    | ASTM D5185m | <b>0</b>     | 0        | <1       |
| Magnesium  | ppm    | ASTM D5185m | <b>&lt;1</b> | 122      | 2        |
| Calcium    | ppm    | ASTM D5185m | <b>361</b>   | 250      | 123      |
| Phosphorus | ppm    | ASTM D5185m | <b>417</b>   | 341      | 215      |
| Zinc       | ppm    | ASTM D5185m | <b>0</b>     | 176      | 0        |
| Sulfur     | ppm    | ASTM D5185m | <b>1467</b>  | 1527     | 1550     |

## CONTAMINANTS


|           | method | limit/base      | current   | history1 | history2 |
|-----------|--------|-----------------|-----------|----------|----------|
| Silicon   | ppm    | ASTM D5185m >20 | <b>11</b> | 4        | 4        |
| Sodium    | ppm    | ASTM D5185m     | <b>6</b>  | 3        | 0        |
| Potassium | ppm    | ASTM D5185m >20 | <b>1</b>  | 0        | 2        |

## VISUAL

|                  | method | limit/base    | current      | history1 | history2 |
|------------------|--------|---------------|--------------|----------|----------|
| White Metal      | scalar | *Visual NONE  | <b>NONE</b>  | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual NONE  | <b>NONE</b>  | NONE     | NONE     |
| Precipitate      | scalar | *Visual NONE  | <b>NONE</b>  | NONE     | NONE     |
| Silt             | scalar | *Visual NONE  | <b>NONE</b>  | NONE     | NONE     |
| Debris           | scalar | *Visual NONE  | <b>NONE</b>  | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual NONE  | <b>NONE</b>  | NONE     | NONE     |
| Appearance       | scalar | *Visual NORML | <b>NORML</b> | NORML    | NORML    |
| Odor             | scalar | *Visual NORML | <b>NORML</b> | NORML    | NORML    |
| Emulsified Water | scalar | *Visual >0.1  | <b>NEG</b>   | NEG      | NEG      |
| Free Water       | scalar | *Visual       | <b>NEG</b>   | NEG      | NEG      |



# OIL ANALYSIS REPORT

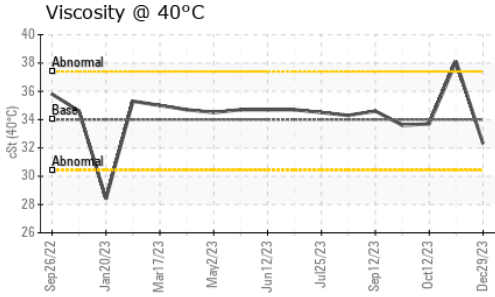




### FLUID PROPERTIES

| method      | limit/base    | current | history1    | history2 |      |
|-------------|---------------|---------|-------------|----------|------|
| Visc @ 40°C | cSt ASTM D445 | 34      | <b>32.3</b> | 38.1     | 33.7 |

### SAMPLE IMAGES

| method | limit/base | current | history1 | history2 |          |
|--------|------------|---------|----------|----------|----------|
| Color  |            |         | no image | no image | no image |
| Bottom |            |         | no image | no image | no image |

### GRAPHS

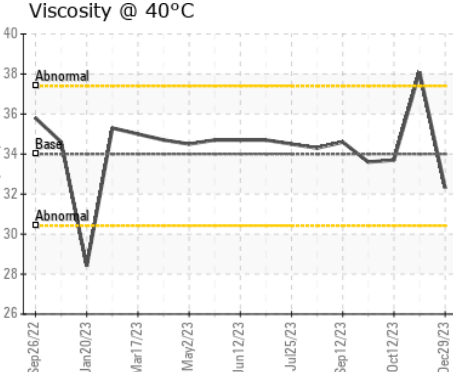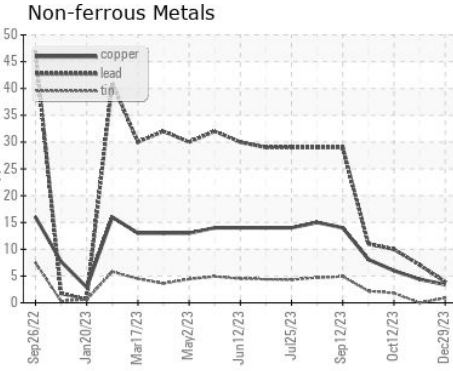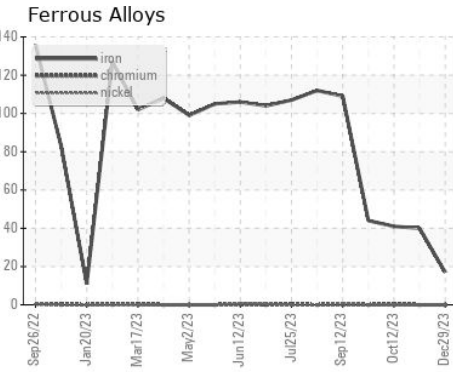

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0107258 **Recieved** : 05 Jan 2024  
**Lab Number** : **06053255** **Diagnosed** : 08 Jan 2024  
**Unique Number** : 10819204 **Diagnostician** : Don Baldrige  
**Test Package** : FLEET

**GFL Environmental - 010 - Stockbridge**  
 1280 Rum Creek Parkway  
 Stockbridge, GA  
 US 30281  
 Contact: JOSHUA TINKER  
 joshuatinker@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: