




# OIL ANALYSIS REPORT

Sample Rating Trend

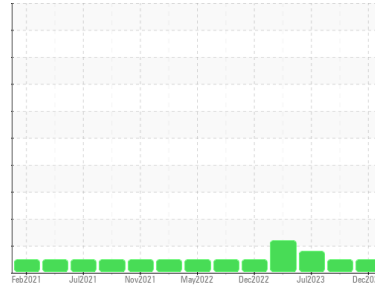

**NORMAL**



Machine Id  
**4674M**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0107674</b>	GFL0107025	GFL0082746
Sample Date	Client Info		<b>28 Dec 2023</b>	14 Dec 2023	10 Jul 2023
Machine Age	hrs	Client Info	<b>14244</b>	14223	13124
Oil Age	hrs	Client Info	<b>600</b>	0	600
Oil Changed	Client Info		<b>Changed</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	MARGINAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	▲ 2.1
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	<b>17</b>	42	20
Chromium	ppm	ASTM D5185m >5	<b>&lt;1</b>	1	<1
Nickel	ppm	ASTM D5185m >2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >30	<b>2</b>	6	3
Lead	ppm	ASTM D5185m >30	<b>&lt;1</b>	<1	0
Copper	ppm	ASTM D5185m >150	<b>2</b>	2	<1
Tin	ppm	ASTM D5185m >5	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>7</b>	<1	2
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>59</b>	60	64
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m 1010	<b>912</b>	1105	999
Calcium	ppm	ASTM D5185m 1070	<b>1072</b>	1247	1116
Phosphorus	ppm	ASTM D5185m 1150	<b>1033</b>	1155	1070
Zinc	ppm	ASTM D5185m 1270	<b>1201</b>	1350	1366
Sulfur	ppm	ASTM D5185m 2060	<b>2846</b>	2840	3705

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>5</b>	11	7
Sodium	ppm	ASTM D5185m	<b>7</b>	7	7
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	3	1

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.4</b>	1.3	0.6
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.0</b>	12.7	10.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.5</b>	25.6	21.1

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>17.6</b>	22.6	18.5
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>7.2</b>	6.0	7.8







# OIL ANALYSIS REPORT

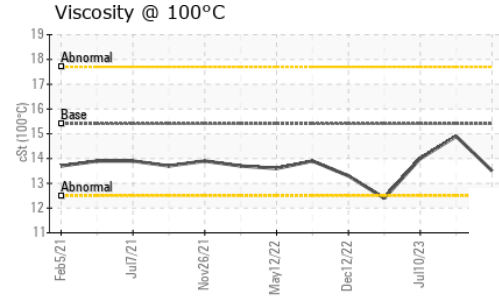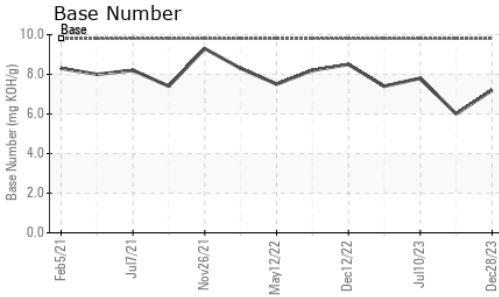

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.5</b>	14.9	14.0

## GRAPHS

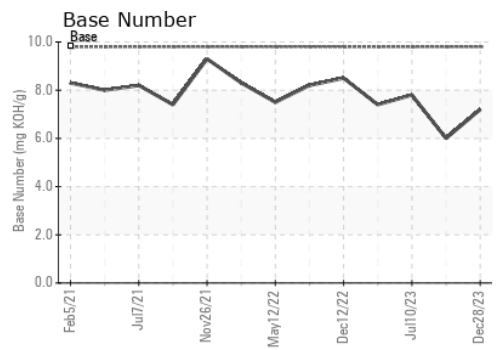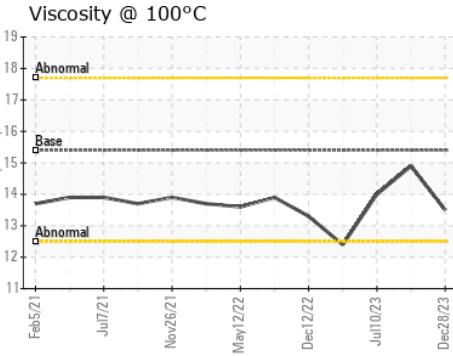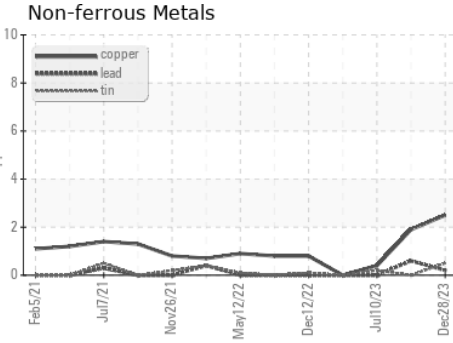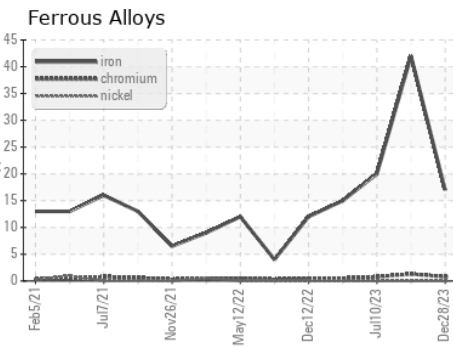

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0107674 **Received** : 08 Jan 2024  
**Lab Number** : 06053297 **Diagnosed** : 09 Jan 2024  
**Unique Number** : 10819246 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 465 - Pontiac**  
 888 Baldwin  
 Pontiac, MI  
 US 48340  
 Contact: Ricky Matthews  
 rickymathews@gflenv.com  
 T: (586)825-9514  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)