




# OIL ANALYSIS REPORT

Sample Rating Trend

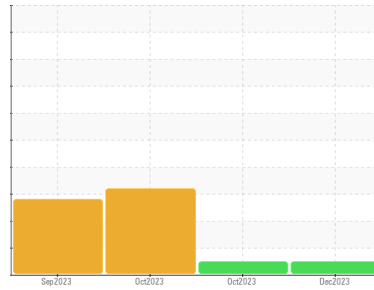

**NORMAL**



Machine Id  
**714065**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0107056</b>	GFL0096525	GFL0096575
Sample Date	Client Info		<b>26 Dec 2023</b>	30 Oct 2023	13 Oct 2023
Machine Age	hrs	Client Info	<b>1166</b>	744	635
Oil Age	hrs	Client Info	<b>600</b>	400	600
Oil Changed	Client Info		<b>Changed</b>	Not Changd	Changed
Sample Status			<b>NORMAL</b>	NORMAL	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	0.3
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>18</b>	8	41
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >5	<b>5</b>	3	7
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	<1
Aluminum	ppm	ASTM D5185m >20	<b>4</b>	3	16
Lead	ppm	ASTM D5185m >40	<b>1</b>	0	<1
Copper	ppm	ASTM D5185m >330	<b>166</b>	64	295
Tin	ppm	ASTM D5185m >15	<b>2</b>	<1	3
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>12</b>	26	▲ 187
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	2
Molybdenum	ppm	ASTM D5185m 60	<b>64</b>	67	123
Manganese	ppm	ASTM D5185m 0	<b>1</b>	<1	4
Magnesium	ppm	ASTM D5185m 1010	<b>925</b>	935	708
Calcium	ppm	ASTM D5185m 1070	<b>1141</b>	1138	1439
Phosphorus	ppm	ASTM D5185m 1150	<b>1022</b>	1046	▲ 709
Zinc	ppm	ASTM D5185m 1270	<b>1180</b>	1258	▲ 876
Sulfur	ppm	ASTM D5185m 2060	<b>2707</b>	3193	2526

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>12</b>	15	▲ 84
Sodium	ppm	ASTM D5185m	<b>3</b>	2	3
Potassium	ppm	ASTM D5185m >20	<b>9</b>	6	33

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.3</b>	0.1	0.4
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.3</b>	5.6	9.9
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.2</b>	18.6	23.2

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.1</b>	14.4	20.9
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>7.1</b>	8.9	8.1







# OIL ANALYSIS REPORT

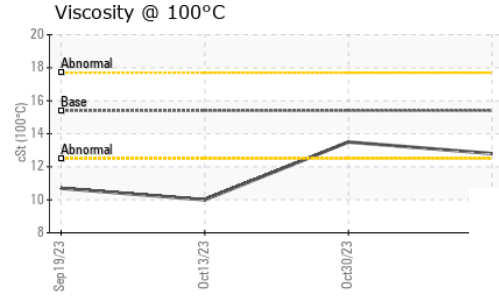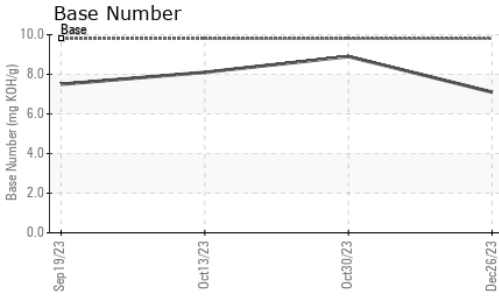

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>12.8</b>	13.5	▲ 10.0

## GRAPHS

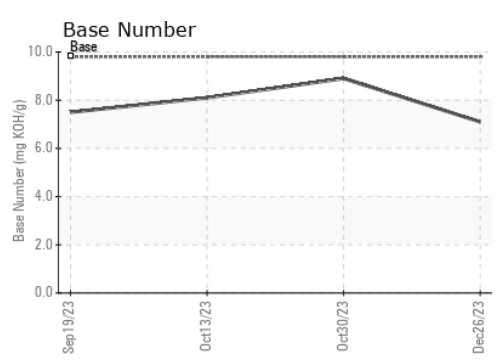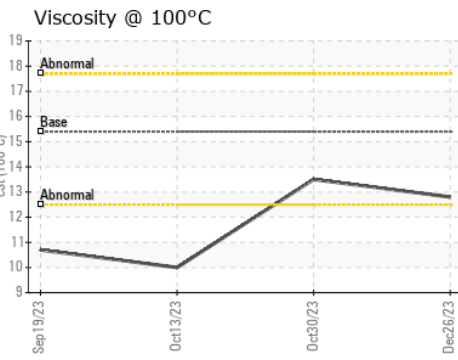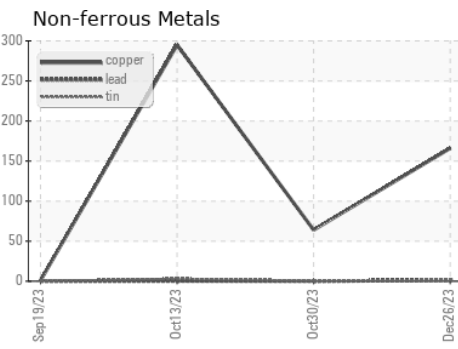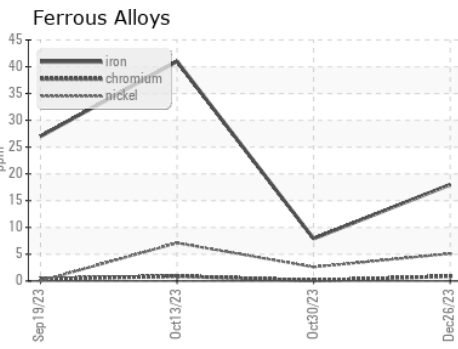

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0107056 **Received** : 08 Jan 2024  
**Lab Number** : 06053299 **Diagnosed** : 09 Jan 2024  
**Unique Number** : 10819248 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 465 - Pontiac**  
 888 Baldwin  
 Pontiac, MI  
 US 48340  
 Contact: Ricky Matthews  
 rickymathews@gflenv.com  
 T: (586)825-9514  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)