


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

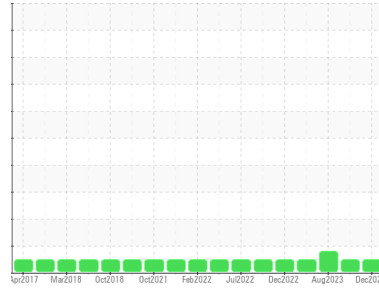

Area  
**KEMP QUARRIES / RIVER VALLEY BACKBONE**  
 Machine Id  
**OHT087**  
 Component  
**Diesel Engine**  
 Fluid  
**MOBIL DELVAC 1300 SUPER15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PCA0069905</b>	PCA0084885	PCA0084881
Sample Date	Client Info	<b>28 Dec 2023</b>	13 Oct 2023	14 Aug 2023
Machine Age	hrs Client Info	<b>33775</b>	33094	33094
Oil Age	hrs Client Info	<b>325</b>	300	300
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed
Sample Status		<b>NORMAL</b>	NORMAL	ABNORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>34</b>	31	47
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm ASTM D5185m >4	<b>&lt;1</b>	0	<1
Titanium	ppm ASTM D5185m	<b>&lt;1</b>	<1	0
Silver	ppm ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>2</b>	<1	<1
Lead	ppm ASTM D5185m >40	<b>2</b>	4	12
Copper	ppm ASTM D5185m >330	<b>37</b>	161	▲ 583
Tin	ppm ASTM D5185m >15	<b>1</b>	<1	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>1</b>	<1	<1
Barium	ppm ASTM D5185m 0	<b>8</b>	0	0
Molybdenum	ppm ASTM D5185m 0	<b>76</b>	64	67
Manganese	ppm ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 0	<b>1209</b>	1028	1120
Calcium	ppm ASTM D5185m	<b>1346</b>	1099	1303
Phosphorus	ppm ASTM D5185m	<b>1172</b>	1053	1137
Zinc	ppm ASTM D5185m	<b>1526</b>	1321	1440
Sulfur	ppm ASTM D5185m	<b>3677</b>	2854	3686

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>4</b>	3	3
Sodium	ppm ASTM D5185m	<b>0</b>	3	2
Potassium	ppm ASTM D5185m >20	<b>1</b>	3	<1



## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.7</b>	0.8	1.3
Nitration	Abs/cm *ASTM D7624 >20	<b>8.6</b>	8.2	10.2
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>21.6</b>	21.2	23.0

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>17.6</b>	17.2	19.3
Base Number (BN)	mg KOH/g ASTM D2896 9.4	<b>8.6</b>	8.1	8.0









# OIL ANALYSIS REPORT

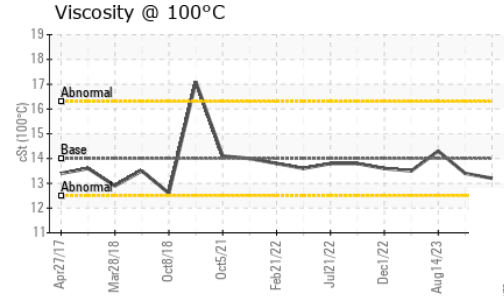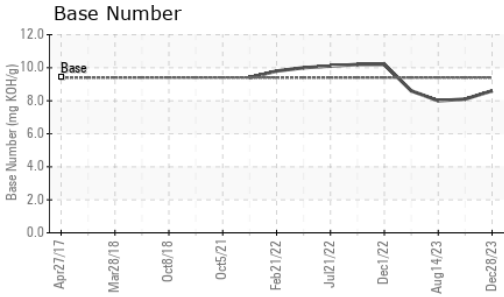

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445 14	<b>13.2</b>	13.4	14.3

## GRAPHS

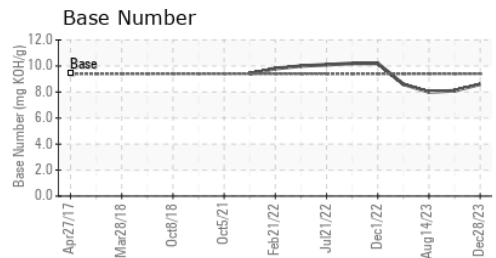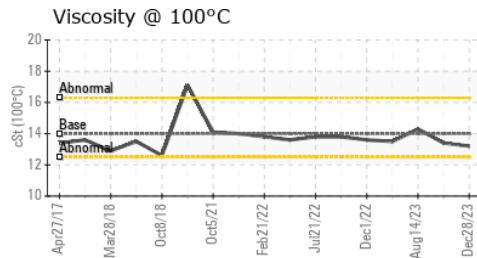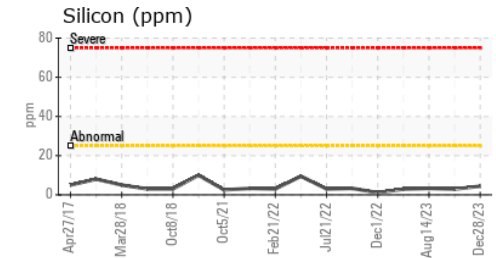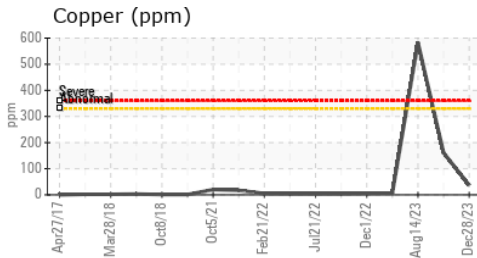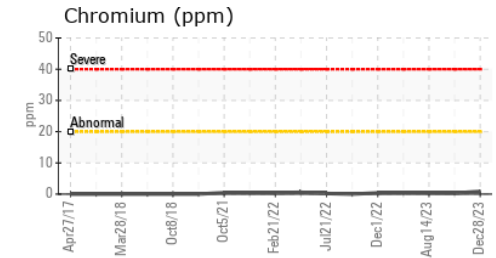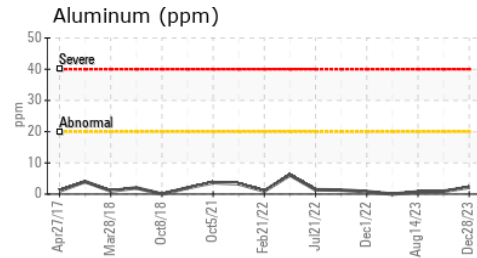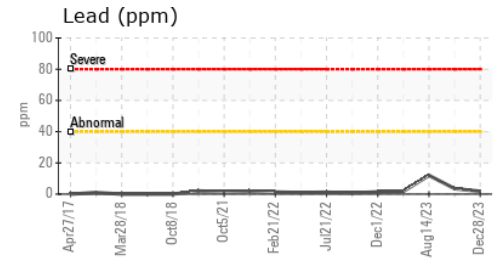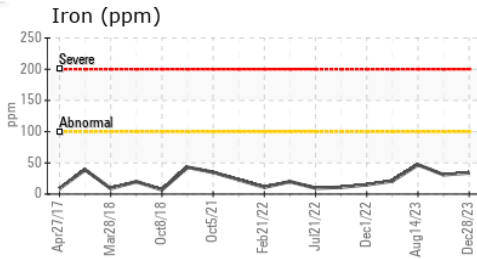

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0069905 **Received** : 08 Jan 2024  
**Lab Number** : 06053380 **Diagnosed** : 09 Jan 2024  
**Unique Number** : 10819329 **Diagnostician** : Sean Felton  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**Kemp Quarries - River Valley - Backbone**  
 5600 S Hwy 253  
 Huntington, AR  
 US 72940  
 Contact:  
 backbone@rivervalleyquarries.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: