




PROBLEM SUMMARY

Sample Rating Trend

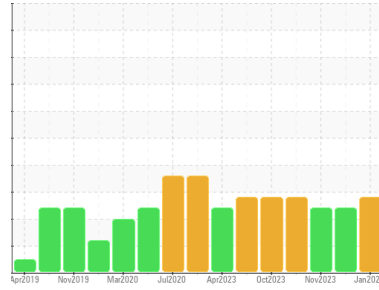

FUEL





Machine Id
723024-361659

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

COMPONENT CONDITION SUMMARY

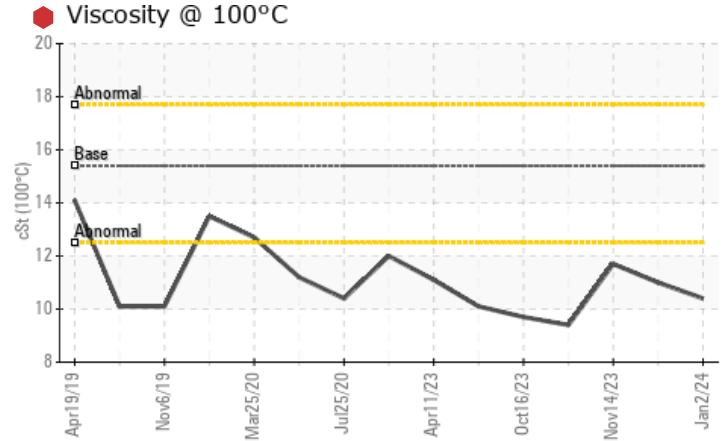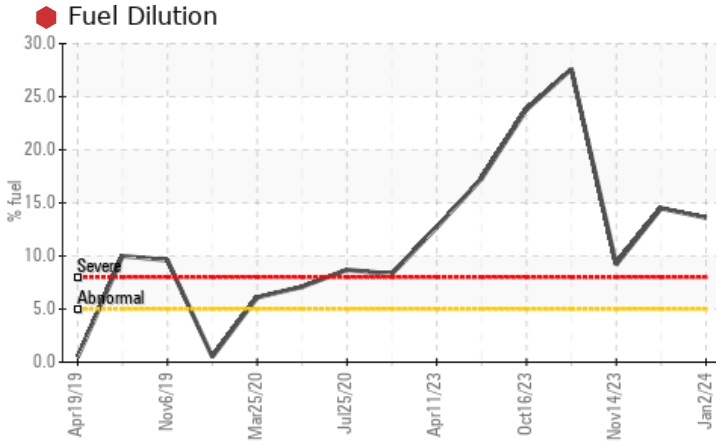

RECOMMENDATION

We advise that you check the fuel injection system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

| Sample Status | | | | SEVERE | SEVERE | SEVERE |
|---------------|-----|------------|------|--------|--------|--------|
| Fuel | % | ASTM D3524 | >5 | 13.6 | 14.5 | 9.2 |
| Visc @ 100°C | cSt | ASTM D445 | 15.4 | 10.4 | 11.0 | 11.7 |

Customer Id: GFL837
Sample No.: GFL0108165
Lab Number: 06054584
Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
Wes Davis +1 905-569-8600 x223
wesd@wearcheck.ca

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

| Action | Status | Date | Done By | Description |
|----------------------------|--------|------|---------|---|
| Change Fluid | --- | --- | ? | We recommend that you drain the oil from the component if this has not already been done. |
| Resample | --- | --- | ? | We recommend an early resample to monitor this condition. |
| Check Fuel/injector System | --- | --- | ? | We advise that you check the fuel injection system. |

HISTORICAL DIAGNOSIS

06 Dec 2023 Diag: Wes Davis

FUEL



We advise that you check the fuel injection system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

[view report](#)



14 Nov 2023 Diag: Wes Davis

FUEL



We advise that you check the fuel injection system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

[view report](#)



25 Oct 2023 Diag: Angela Borella

FUEL



We advise that you check the fuel injection system. We recommend that you drain the oil and perform a filter service on this component if not already done. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a high amount of fuel present in the oil. Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.


[view report](#)





OIL ANALYSIS REPORT

Sample Rating Trend

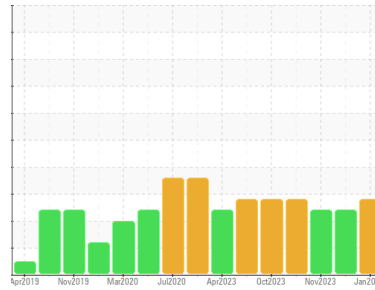

FUEL



Machine Id
723024-361659

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

We advise that you check the fuel injection system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

| method | limit/base | current | history1 | history2 |
|---------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | GFL0108165 | GFL0102532 | GFL0098622 |
| Sample Date | Client Info | 02 Jan 2024 | 06 Dec 2023 | 14 Nov 2023 |
| Machine Age | hrs | 27216 | 27061 | 26927 |
| Oil Age | hrs | 0 | 0 | 0 |
| Oil Changed | Client Info | Not Chngd | Not Chngd | N/A |
| Sample Status | | SEVERE | SEVERE | SEVERE |

CONTAMINATION

| method | limit/base | current | history1 | history2 |
|--------|----------------|------------|----------|----------|
| Water | WC Method >0.2 | NEG | NEG | NEG |
| Glycol | WC Method | NEG | NEG | NEG |

WEAR METALS

| method | limit/base | current | history1 | history2 |
|----------|----------------------|--------------|----------|----------|
| Iron | ppm ASTM D5185m >100 | 14 | 11 | 8 |
| Chromium | ppm ASTM D5185m >20 | 1 | <1 | <1 |
| Nickel | ppm ASTM D5185m >4 | 0 | 0 | 0 |
| Titanium | ppm ASTM D5185m | 0 | 0 | <1 |
| Silver | ppm ASTM D5185m >3 | 0 | 0 | 0 |
| Aluminum | ppm ASTM D5185m >20 | 2 | 1 | 2 |
| Lead | ppm ASTM D5185m >40 | 1 | 0 | <1 |
| Copper | ppm ASTM D5185m >330 | <1 | 0 | <1 |
| Tin | ppm ASTM D5185m >15 | <1 | 0 | 0 |
| Vanadium | ppm ASTM D5185m | 0 | 0 | <1 |
| Cadmium | ppm ASTM D5185m | 0 | 0 | 0 |

ADDITIVES

| method | limit/base | current | history1 | history2 |
|------------|----------------------|--------------|----------|----------|
| Boron | ppm ASTM D5185m 0 | 3 | 2 | 6 |
| Barium | ppm ASTM D5185m 0 | 0 | 0 | 0 |
| Molybdenum | ppm ASTM D5185m 60 | 51 | 52 | 54 |
| Manganese | ppm ASTM D5185m 0 | <1 | 0 | <1 |
| Magnesium | ppm ASTM D5185m 1010 | 858 | 805 | 890 |
| Calcium | ppm ASTM D5185m 1070 | 922 | 928 | 1043 |
| Phosphorus | ppm ASTM D5185m 1150 | 963 | 862 | 1044 |
| Zinc | ppm ASTM D5185m 1270 | 1140 | 1045 | 1234 |
| Sulfur | ppm ASTM D5185m 2060 | 2751 | 2997 | 3072 |

CONTAMINANTS

| method | limit/base | current | history1 | history2 |
|-----------|---------------------|--------------|----------|----------|
| Silicon | ppm ASTM D5185m >25 | 6 | 4 | 6 |
| Sodium | ppm ASTM D5185m | 23 | 17 | 13 |
| Potassium | ppm ASTM D5185m >20 | <1 | 2 | 3 |
| Fuel | % ASTM D3524 >5 | 13.6 | 14.5 | 9.2 |

INFRA-RED

| method | limit/base | current | history1 | history2 |
|-----------|--------------------------|-------------|----------|----------|
| Soot % | % *ASTM D7844 >3 | 0.9 | 0.7 | 0.5 |
| Nitration | Abs/cm *ASTM D7624 >20 | 11.5 | 10.7 | 8.5 |
| Sulfation | Abs/.1mm *ASTM D7415 >30 | 23.0 | 21.9 | 20.5 |


FLUID DEGRADATION

| method | limit/base | current | history1 | history2 |
|------------------|--------------------------|-------------|----------|----------|
| Oxidation | Abs/.1mm *ASTM D7414 >25 | 23.4 | 21.8 | 17.9 |
| Base Number (BN) | mg KOH/g ASTM D2896 9.8 | 6.2 | 6.9 | 8.3 |




OIL ANALYSIS REPORT


Fuel Dilution

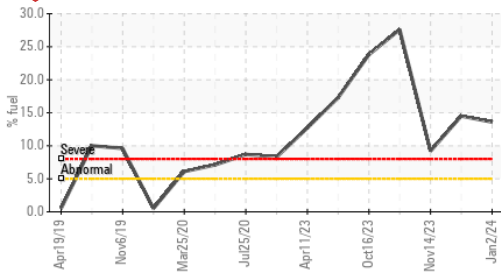

Viscosity @ 100°C

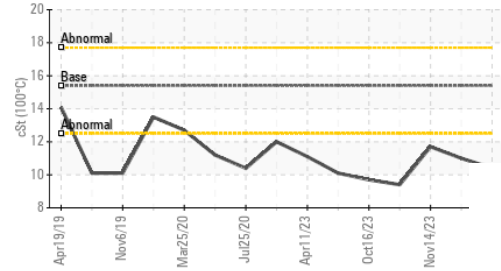

Base Number

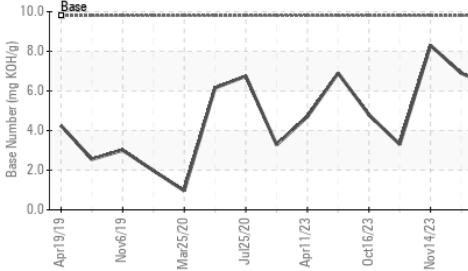

VISUAL


| | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |

FLUID PROPERTIES


| | method | limit/base | current | history1 | history2 |
|--------------|--------|------------|--|--|--|
| Visc @ 100°C | cSt | ASTM D445 | 15.4 ● 10.4 | 11.0 ▲ | 11.7 ▲ |

GRAPHS


Ferrous Alloys

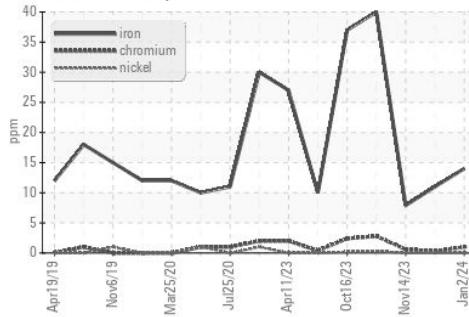


Non-ferrous Metals

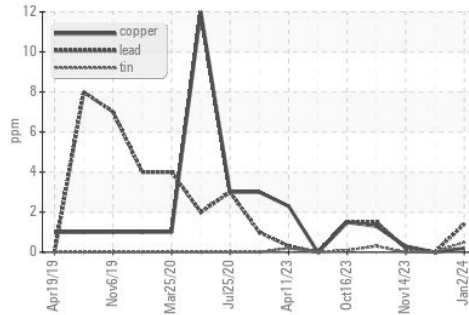

Viscosity @ 100°C

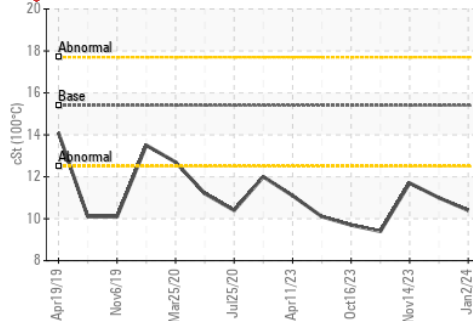

Base Number

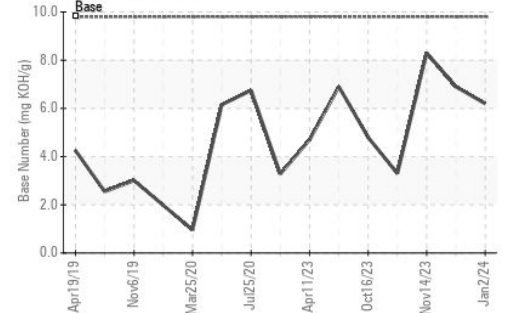

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0108165 Recieved : 08 Jan 2024
 Lab Number : 06054584 Diagnosed : 12 Jan 2024
 Unique Number : 10820533 Diagnostician : Wes Davis
 Test Package : FLEET (Additional Tests: PercentFuel)

GFL Environmental - 837 - Harrison TS
 22820 S State Route 291
 Harrisonville, MO
 US 64701
 Contact: BRYAN SWANSON
 bryanswanson@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: