




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area  
**(27KM1B)**  
Machine Id  
**413116**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON UHP 5W30 (--- QTS)**

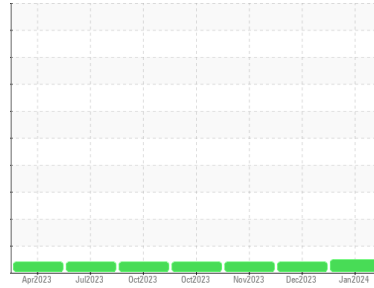

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please note that this is a corrected copy for data entry updates.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2    |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>GFL0102469</b>  | GFL0102523  | GFL0098660  |
| Sample Date   | Client Info |             | <b>03 Jan 2024</b> | 05 Dec 2023 | 15 Nov 2023 |
| Machine Age   | hrs         | Client Info | <b>0</b>           | 2082        | 1951        |
| Oil Age       | hrs         | Client Info | <b>0</b>           | 0           | 0           |
| Oil Changed   | Client Info |             | <b>Changed</b>     | N/A         | N/A         |
| Sample Status |             |             | <b>NORMAL</b>      | ATTENTION   | ATTENTION   |

## CONTAMINATION

|        | method    | limit/base | current        | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel   | WC Method | >3.0       | <b>&lt;1.0</b> | <1.0     | <1.0     |
| Water  | WC Method | >0.2       | <b>NEG</b>     | NEG      | NEG      |
| Glycol | WC Method |            | <b>NEG</b>     | NEG      | NEG      |

## WEAR METALS

|          | method | limit/base       | current      | history1 | history2 |
|----------|--------|------------------|--------------|----------|----------|
| Iron     | ppm    | ASTM D5185m >120 | <b>11</b>    | 8        | 8        |
| Chromium | ppm    | ASTM D5185m >20  | <b>&lt;1</b> | <1       | <1       |
| Nickel   | ppm    | ASTM D5185m >15  | <b>&lt;1</b> | <1       | 0        |
| Titanium | ppm    | ASTM D5185m >2   | <b>0</b>     | 0        | <1       |
| Silver   | ppm    | ASTM D5185m >3   | <b>&lt;1</b> | <1       | <1       |
| Aluminum | ppm    | ASTM D5185m >20  | <b>3</b>     | 3        | 3        |
| Lead     | ppm    | ASTM D5185m >40  | <b>&lt;1</b> | 2        | <1       |
| Copper   | ppm    | ASTM D5185m >330 | <b>63</b>    | 71       | 70       |
| Tin      | ppm    | ASTM D5185m >15  | <b>1</b>     | <1       | <1       |
| Vanadium | ppm    | ASTM D5185m      | <b>0</b>     | <1       | <1       |
| Cadmium  | ppm    | ASTM D5185m      | <b>0</b>     | 0        | 0        |

## ADDITIVES

|            | method | limit/base       | current      | history1 | history2 |
|------------|--------|------------------|--------------|----------|----------|
| Boron      | ppm    | ASTM D5185m 0    | <b>20</b>    | 27       | 31       |
| Barium     | ppm    | ASTM D5185m 0    | <b>0</b>     | 0        | 0        |
| Molybdenum | ppm    | ASTM D5185m 64   | <b>60</b>    | 57       | 56       |
| Manganese  | ppm    | ASTM D5185m 0    | <b>&lt;1</b> | <1       | <1       |
| Magnesium  | ppm    | ASTM D5185m 1160 | <b>1181</b>  | 1061     | 1096     |
| Calcium    | ppm    | ASTM D5185m 820  | <b>863</b>   | 788      | 804      |
| Phosphorus | ppm    | ASTM D5185m 1160 | <b>1158</b>  | 983      | 948      |
| Zinc       | ppm    | ASTM D5185m 1260 | <b>1397</b>  | 1200     | 1211     |
| Sulfur     | ppm    | ASTM D5185m 3000 | <b>3469</b>  | 3105     | 3088     |

## CONTAMINANTS

|           | method | limit/base      | current  | history1 | history2 |
|-----------|--------|-----------------|----------|----------|----------|
| Silicon   | ppm    | ASTM D5185m >25 | <b>4</b> | 5        | 5        |
| Sodium    | ppm    | ASTM D5185m     | <b>4</b> | 3        | 4        |
| Potassium | ppm    | ASTM D5185m >20 | <b>9</b> | 8        | 6        |

## INFRA-RED



|           | method   | limit/base      | current     | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot %    | %        | *ASTM D7844 >4  | <b>0.4</b>  | 0.2      | 0.2      |
| Nitration | Abs/cm   | *ASTM D7624 >20 | <b>10.4</b> | 9.3      | 8.8      |
| Sulfation | Abs/.1mm | *ASTM D7415 >30 | <b>23.3</b> | 20.2     | 20.3     |

## FLUID DEGRADATION

|                  | method   | limit/base      | current     | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Oxidation        | Abs/.1mm | *ASTM D7414 >25 | <b>21.3</b> | 18.8     | 18.5     |
| Base Number (BN) | mg KOH/g | ASTM D2896 11.0 | <b>5.0</b>  | 6.7      | 8.4      |







# OIL ANALYSIS REPORT

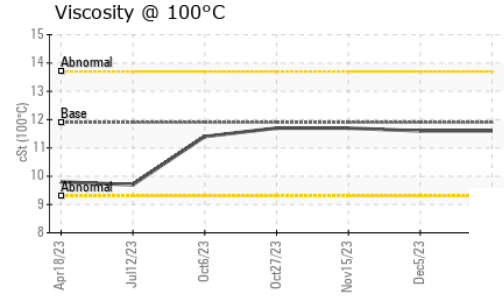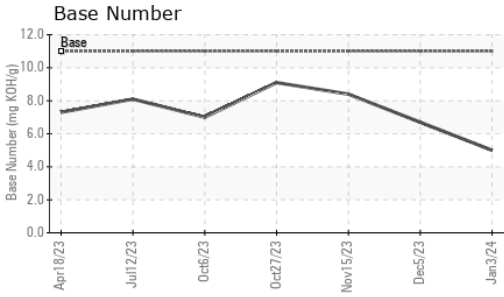

| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | LIGHT    |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C     | cSt    | ASTM D445  | 11.9    | 11.6 ▲   | 11.7 ▲   |

## GRAPHS

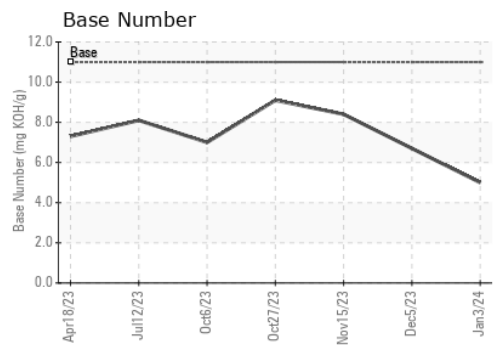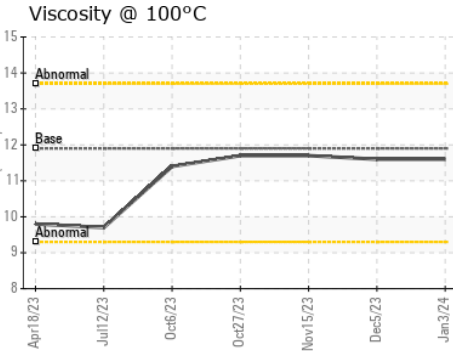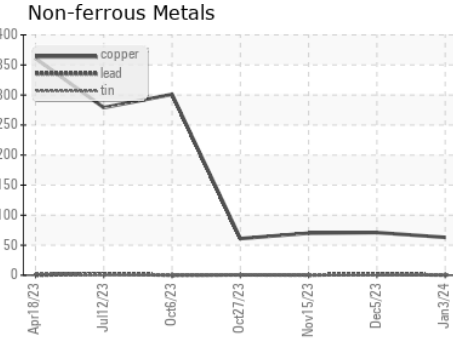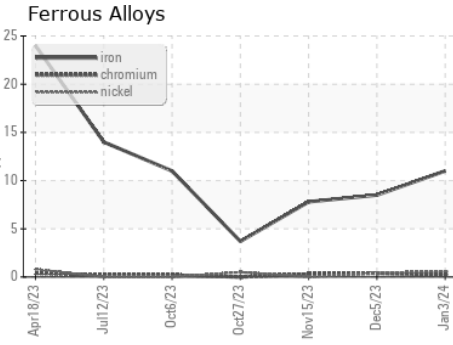

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0102469 **Received** : 08 Jan 2024  
**Lab Number** : 06054607 **Diagnosed** : 16 Jan 2024  
**Unique Number** : 10820556 **Diagnostician** : Doug Bogart  
**Test Package** : FLEET

**GFL Environmental - 836 - Kansas City Hauling**  
 7801 East Truman Road  
 Kansas City, MO  
 US 64126  
 Contact: Robert Hart  
 rhart@gflenv.com  
 T: (580)461-1509  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)