




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

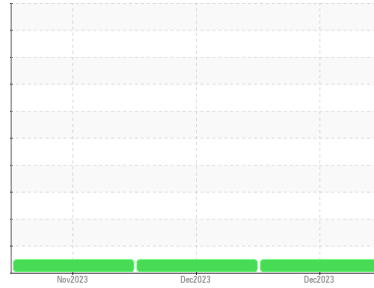

Machine Id
834047
 Component
Natural Gas Engine
 Fluid
{not provided} (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			GFL0102467	GFL0102517	GFL0098605
Sample Date	Client Info			30 Dec 2023	04 Dec 2023	09 Nov 2023
Machine Age	hrs	Client Info		853	716	580
Oil Age	hrs	Client Info		0	0	0
Oil Changed	Client Info			Not Changed	N/A	Not Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	53	48	44
Chromium	ppm	ASTM D5185m	>4	<1	0	<1
Nickel	ppm	ASTM D5185m	>2	2	<1	<1
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m	>3	<1	0	<1
Aluminum	ppm	ASTM D5185m	>9	4	2	3
Lead	ppm	ASTM D5185m	>30	2	<1	<1
Copper	ppm	ASTM D5185m	>35	16	16	15
Tin	ppm	ASTM D5185m	>4	2	<1	1
Vanadium	ppm	ASTM D5185m		0	0	<1
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		6	6	10
Barium	ppm	ASTM D5185m		2	0	0
Molybdenum	ppm	ASTM D5185m		55	52	49
Manganese	ppm	ASTM D5185m		12	10	10
Magnesium	ppm	ASTM D5185m		867	785	780
Calcium	ppm	ASTM D5185m		1218	1146	1151
Phosphorus	ppm	ASTM D5185m		811	641	622
Zinc	ppm	ASTM D5185m		1010	896	902
Sulfur	ppm	ASTM D5185m		2474	2510	2175



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>+100	32	31	28
Sodium	ppm	ASTM D5185m		5	2	3
Potassium	ppm	ASTM D5185m	>20	2	3	1

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844		0.3	0	0.1
Nitration	Abs/cm	*ASTM D7624	>20	11.3	12.3	11.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.2	23.7	21.6

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	20.3	21.6	19.9
Base Number (BN)	mg KOH/g	ASTM D2896		4.5	3.4	3.2







OIL ANALYSIS REPORT

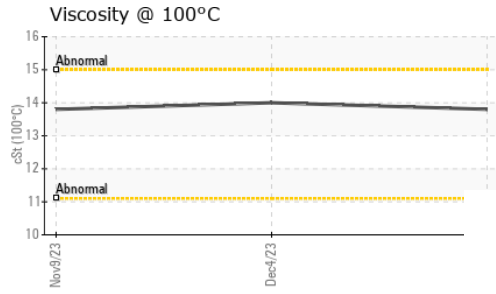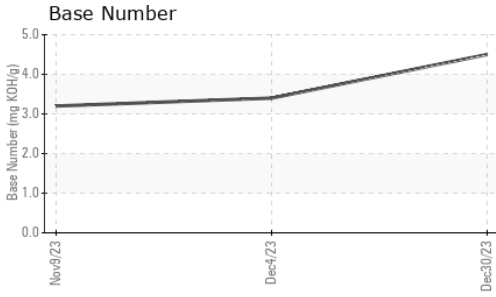

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	13.8	14.0	13.8

GRAPHS

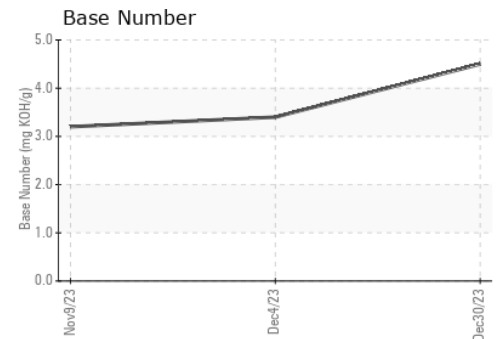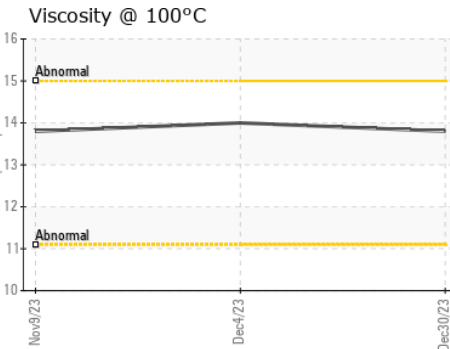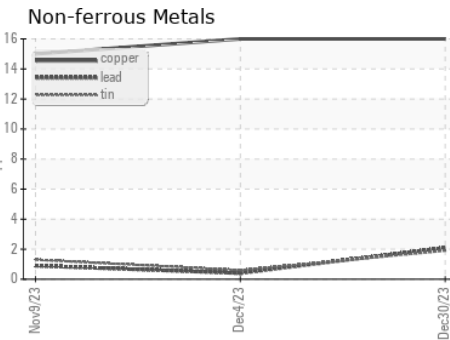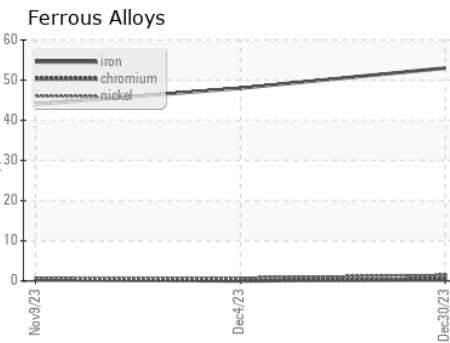

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0102467 Recieved : 08 Jan 2024
 Lab Number : 06054627 Diagnosed : 09 Jan 2024
 Unique Number : 10820576 Diagnostician : Wes Davis
 Test Package : FLEET

GFL Environmental - 837 - Harrison TS
 22820 S State Route 291
 Harrisonville, MO
 US 64701
 Contact: BRYAN SWANSON
 bryanswanson@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: