



OIL ANALYSIS REPORT

Sample Rating Trend

GLYCOL



Machine Id
834094

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- QTS)



DIAGNOSIS

▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

▲ Contamination

Sodium and/or potassium levels remain high. Test for glycol is negative.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0102477	GFL0102537	---
Sample Date	Client Info	20 Dec 2023	25 Nov 2023	---
Machine Age	hrs	285	139	---
Oil Age	hrs	0	0	---
Oil Changed	Client Info	Not Chngd	N/A	---
Sample Status		ABNORMAL	ABNORMAL	---

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	<1.0	---
Water	WC Method >0.2	NEG	NEG	---

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	48	42	---
Chromium	ppm ASTM D5185m >20	<1	<1	---
Nickel	ppm ASTM D5185m >4	1	<1	---
Titanium	ppm ASTM D5185m	<1	<1	---
Silver	ppm ASTM D5185m >3	0	0	---
Aluminum	ppm ASTM D5185m >20	13	9	---
Lead	ppm ASTM D5185m >40	1	0	---
Copper	ppm ASTM D5185m >330	16	16	---
Tin	ppm ASTM D5185m >15	1	<1	---
Vanadium	ppm ASTM D5185m	0	0	---
Cadmium	ppm ASTM D5185m	0	0	---

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	32	47	---
Barium	ppm ASTM D5185m 0	2	9	---
Molybdenum	ppm ASTM D5185m 60	57	56	---
Manganese	ppm ASTM D5185m 0	13	12	---
Magnesium	ppm ASTM D5185m 1010	821	694	---
Calcium	ppm ASTM D5185m 1070	1169	1144	---
Phosphorus	ppm ASTM D5185m 1150	820	717	---
Zinc	ppm ASTM D5185m 1270	977	847	---
Sulfur	ppm ASTM D5185m 2060	2596	2510	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	35	34	---
Sodium	ppm ASTM D5185m	6	8	---
Potassium	ppm ASTM D5185m >20	▲ 60	▲ 58	---
Glycol	% *ASTM D2982	NEG	NEG	---

INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.1	0	---
Nitration	Abs/cm *ASTM D7624 >20	10.5	8.3	---
Sulfation	Abs/.1mm *ASTM D7415 >30	20.4	20.2	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	18.0	17.6	---
Base Number (BN)	mg KOH/g ASTM D2896 9.8	6.8	8.1	---







OIL ANALYSIS REPORT

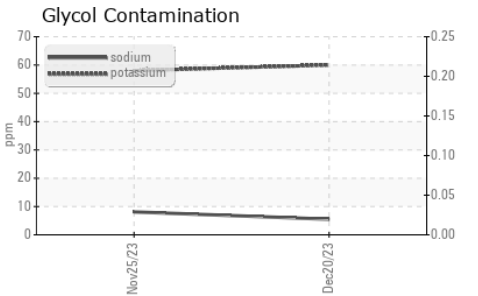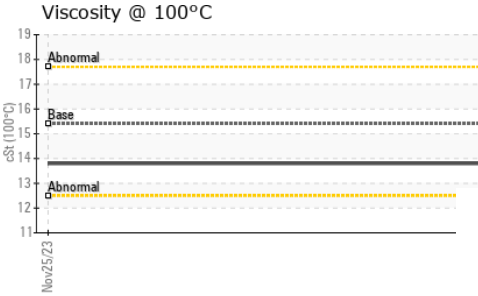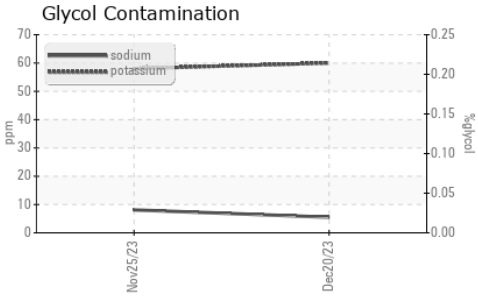

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.8	13.8

GRAPHS

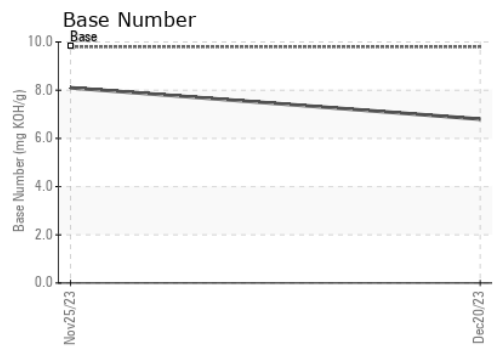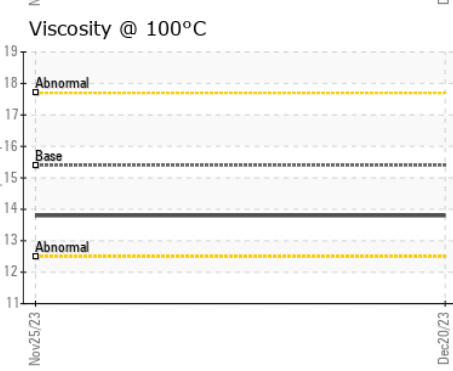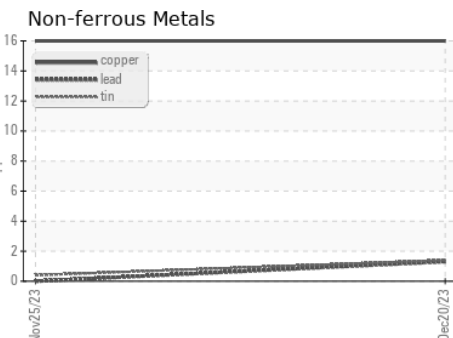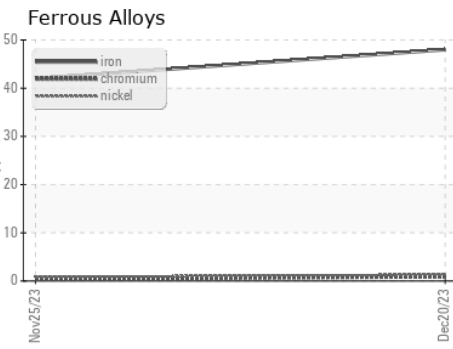

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0102477 **Received** : 08 Jan 2024
Lab Number : 06054648 **Diagnosed** : 10 Jan 2024
Unique Number : 10820597 **Diagnostician** : Jonathan Hester
Test Package : FLEET (Additional Tests: Glycol)

GFL Environmental - 837 - Harrison TS
 22820 S State Route 291
 Harrisonville, MO
 US 64701
 Contact: BRYAN SWANSON
 bryanswanson@gflenv.com
 T:
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)