




# OIL ANALYSIS REPORT

Sample Rating Trend

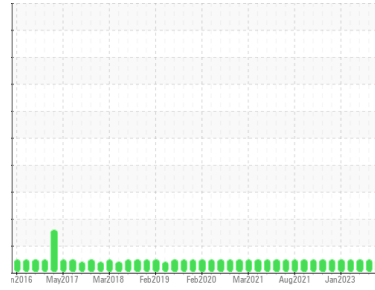

**NORMAL**



Machine Id

**2513**

Component

**Diesel Engine**

Fluid

**PETRO CANADA DURON SHP 15W40 (34 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0092682</b>	GFL0092735	GFL0092711
Sample Date	Client Info	<b>04 Jan 2024</b>	15 Dec 2023	03 Nov 2023
Machine Age	hrs	<b>92071</b>	92071	92071
Oil Age	hrs	<b>207</b>	636	375
Oil Changed	Client Info	<b>Not Changed</b>	Changed	Not Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >90	<b>12</b>	44	25
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	2	1
Nickel	ppm ASTM D5185m >2	<b>&lt;1</b>	0	<1
Titanium	ppm ASTM D5185m >2	<b>&lt;1</b>	0	0
Silver	ppm ASTM D5185m >2	<b>0</b>	0	<1
Aluminum	ppm ASTM D5185m >20	<b>2</b>	12	8
Lead	ppm ASTM D5185m >40	<b>4</b>	21	9
Copper	ppm ASTM D5185m >330	<b>2</b>	5	4
Tin	ppm ASTM D5185m >15	<b>1</b>	1	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>4</b>	5	10
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>64</b>	65	65
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>924</b>	1005	1014
Calcium	ppm ASTM D5185m 1070	<b>1119</b>	1171	1200
Phosphorus	ppm ASTM D5185m 1150	<b>903</b>	1055	1088
Zinc	ppm ASTM D5185m 1270	<b>1217</b>	1363	1396
Sulfur	ppm ASTM D5185m 2060	<b>3150</b>	2771	3204

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>9</b>	15	9
Sodium	ppm ASTM D5185m	<b>33</b>	14	3
Potassium	ppm ASTM D5185m >20	<b>33</b>	9	3

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >6	<b>0.3</b>	0.9	0.6
Nitration	Abs/cm *ASTM D7624 >20	<b>8.0</b>	14.0	10.0
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>19.8</b>	28.3	22.6

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>15.8</b>	26.8	19.5
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>8.3</b>	4.5	6.9







# OIL ANALYSIS REPORT

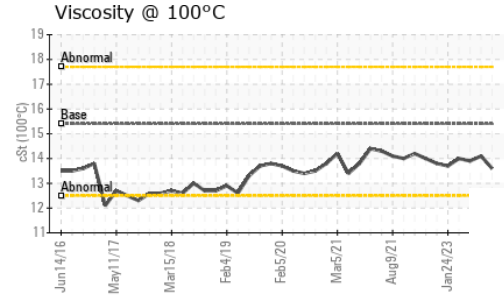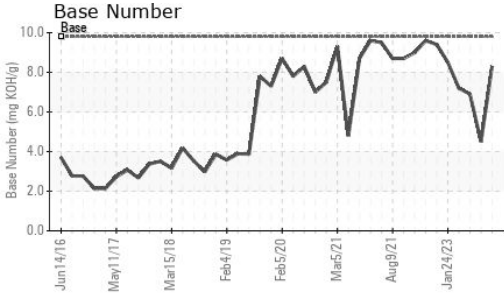

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.6</b>	14.1	13.9

## GRAPHS

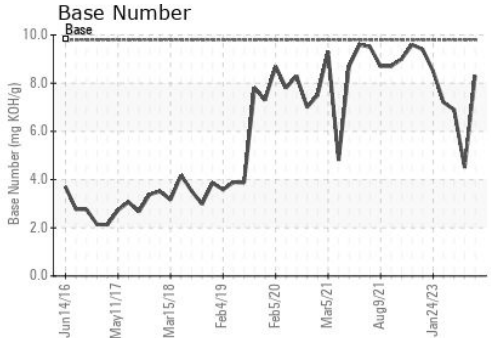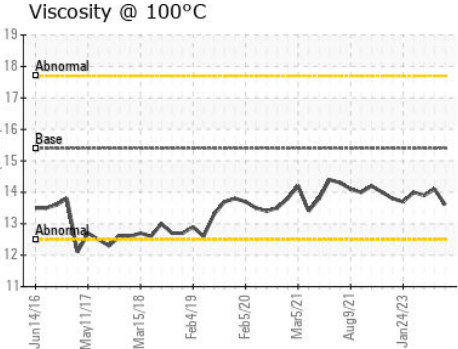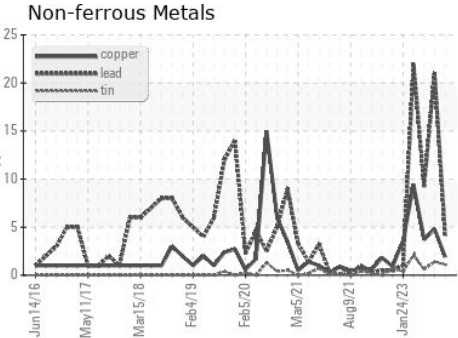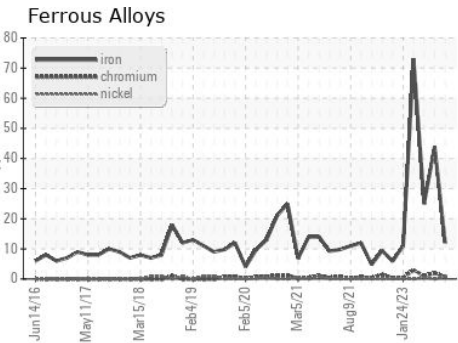

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0092682 **Recieved** : 09 Jan 2024  
**Lab Number** : **06055202** **Diagnosed** : 10 Jan 2024  
**Unique Number** : 10821151 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 005 - Wilson/Tri-East(CNG)**  
 2810 Contentnea Road S  
 Wilson, NC  
 US 27893-8501  
 Contact: SPENCER LIGGON  
 spencer.liggon@gflenv.com  
 T: (800)207-6618  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)